


4. Mount the ADU under the raised floor by using the remaining four screws to connect the bracket ears to the according mounting holes of your raised floor. Please see **Figure 3-d** for reference.



(Figure 3-d) Mount the ADU under a Raised Floor

5. Check whether the ADU is securely installed under the raised floor. Please see **Figure 3-e**.

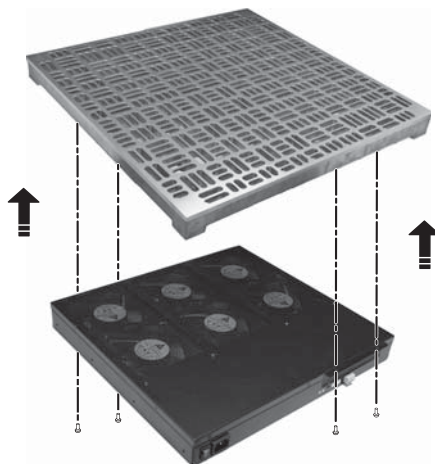

(Figure 3-e)

6. Connect the 1M-long and 3M-long temperature cables to the SOURCE TEMP PROBE port  and the AMB. TEMP PROBE port  respectively.



WARNING:

Do not connect the 1-M long temperature cable to the AMB. TEMP PROBE port or the 3-M long temperature cable to the SOURCE TEMP PROBE port. The misconnection will trigger system failure.