


No.	Item	Description
①	NORMAL (Green)	When the light is on, the APF operates normally.
②	STANDBY (Yellow)	When the light is on, the APF is in standby mode.
③	FAULT (Red)	When the light is on, the APF is malfunctioning.
④	Touchscreen	Users can operate the device through the touchscreen.
⑤	Buzzer	Alarm sounding to warn users.

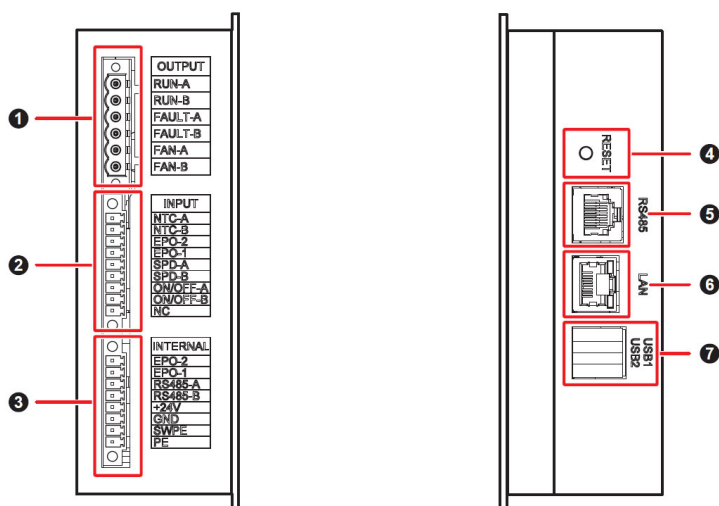

(Figure 2-5: PQC-HMI-F Left and Right Sides)

No.	Item	Description
①	OUTPUT (Dry Contacts)	Output dry contact signals of system operation and other status.
②	INPUT (Wet Contacts)	Input wet contact signals of system temperature, EPO and other signals.
③	INTERNAL (MODBUS)	Communication port between the HMI and the module.
④	RESET	Reset button for the HMI.
⑤	RS485	The standard RS485 protocol for the communication with the master computer.
⑥	LAN	The standard Ethernet port for the communication with the master computer.
⑦	USB1 USB2	The USB communication ports.