


## 3-3-4 Allowable Radial Force/ Axial Force

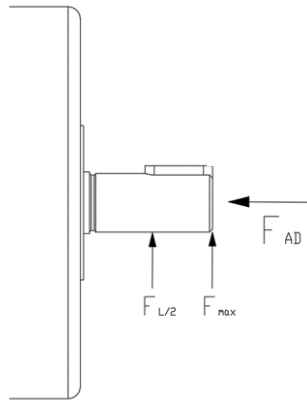

| 3000 rpm |            | Length of Shaft Extension L (mm) | L10≥20,000 Hours |                |               | L10≥40,000 Hours |                |               |
|----------|------------|----------------------------------|------------------|----------------|---------------|------------------|----------------|---------------|
| Frame    | Power (kW) |                                  | $F_{L/2}$ (kN)   | $F_{max}$ (kN) | $F_{AD}$ (kN) | $F_{L/2}$ (kN)   | $F_{max}$ (kN) | $F_{AD}$ (kN) |
| 80       | 0.75–2.2   | 42                               | 0.55             | 0.50           | 0.65          | 0.43             | 0.40           | 0.53          |
| 90       | 3–4        | 46                               | 0.60             | 0.55           | 0.72          | 0.47             | 0.43           | 0.57          |
| 100      | 5.5–7.5    | 62                               | 0.80             | 0.72           | 1.00          | 0.64             | 0.57           | 0.80          |
| 112      | 11–15      | 61                               | 1.13             | 1.04           | 1.37          | 0.90             | 0.82           | 1.08          |
| 132      | 18.5–22    | 82                               | 1.66             | 1.49           | 2.07          | 1.31             | 1.17           | 1.64          |
| 160      | 30–37      | 121                              | 2.15             | 1.91           | 2.70          | 1.69             | 1.50           | 2.13          |
| 180      | 45         | 116                              | 2.79             | 2.52           | 3.62          | 2.18             | 1.97           | 2.85          |
| 200      | 55         | 115.5                            | 3.31             | 3.00           | 4.15          | 2.59             | 2.35           | 3.27          |
| 225      | 75         | 153                              | 3.40             | 3.01           | 4.65          | 2.65             | 2.35           | 3.66          |

| 1500 rpm |            | Length of Shaft Extension L (mm) | L10≥20,000 Hours |                |               | L10≥40,000 Hours |                |               |
|----------|------------|----------------------------------|------------------|----------------|---------------|------------------|----------------|---------------|
| Frame    | Power (kW) |                                  | $F_{L/2}$ (kN)   | $F_{max}$ (kN) | $F_{AD}$ (kN) | $F_{L/2}$ (kN)   | $F_{max}$ (kN) | $F_{AD}$ (kN) |
| 80       | 0.75–1.5   | 42                               | 0.68             | 0.62           | 0.82          | 0.54             | 0.49           | 0.65          |
| 90       | 2.2–3      | 46                               | 0.75             | 0.69           | 0.91          | 0.60             | 0.54           | 0.72          |
| 100      | 4          | 62                               | 1.02             | 0.91           | 1.27          | 0.80             | 0.72           | 1.00          |
| 112      | 5.5–7.5    | 65                               | 1.04             | 0.95           | 1.26          | 0.82             | 0.75           | 0.99          |
| 132      | 11–15      | 90                               | 1.48             | 1.32           | 1.87          | 1.17             | 1.04           | 1.48          |
| 160      | 18.5–22    | 121                              | 2.72             | 2.42           | 3.41          | 2.14             | 1.91           | 2.69          |
| 180      | 30–37      | 116                              | 3.55             | 3.22           | 4.59          | 2.79             | 2.52           | 3.62          |
| 200      | 45         | 115.5                            | 4.17             | 3.79           | 3.26          | 5.23             | 2.96           | 4.12          |
| 225      | 55         | 115.5                            | 4.63             | 4.21           | 3.62          | 5.81             | 3.29           | 4.58          |

| 1500 rpm (Large Bearing) |            | Length of Shaft Extension L (mm) | L10≥20,000 Hours |                |               | L10≥40,000 Hours |                |               |
|--------------------------|------------|----------------------------------|------------------|----------------|---------------|------------------|----------------|---------------|
| Frame                    | Power (kW) |                                  | $F_{L/2}$ (kN)   | $F_{max}$ (kN) | $F_{AD}$ (kN) | $F_{L/2}$ (kN)   | $F_{max}$ (kN) | $F_{AD}$ (kN) |
| 90                       | 2.2–3      | 42                               | 1.48             | 1.33           | 1.75          | 1.15             | 1.05           | 1.38          |
| 100                      | 4          | 46                               | 1.40             | 1.25           | 1.74          | 1.11             | 0.99           | 1.38          |
| 112                      | 5.5–7.5    | 62                               | 2.90             | 2.64           | 3.46          | 2.29             | 2.10           | 2.74          |
| 132                      | 11–15      | 65                               | 3.24             | 2.88           | 4.04          | 2.56             | 2.27           | 3.19          |
| 160                      | 18.5–22    | 90                               | 4.26             | 3.80           | 5.32          | 3.36             | 3.00           | 4.21          |
| 180                      | 30–37      | 121                              | 4.64             | 4.20           | 5.97          | 3.65             | 3.31           | 4.72          |
| 200                      | 45         | 116                              | 5.36             | 4.86           | 6.68          | 4.20             | 3.82           | 5.27          |
| 225                      | 55         | 115.5                            | 5.96             | 5.40           | 7.42          | 4.67             | 4.24           | 5.86          |