


- Sound stability: SVG acts as an infinite impedance to the power grid system and has no negative effect on power system. It is able to output accurate compensation current, which has no negative effect on other equipment.
- Low power loss. The SVG supports ECO mode to allow you to save more energy.
- Integrating control: The capacitor compensation device and the Static Var Generator (SVG) can be controlled by an integrating controller to achieve higher compatibility.
- Flexible applications: Modules can be embedded into standard or customized cabinets that meet the size requirements.
- Wide capacity coverage: The capacity of a single cabinet is based on the quantity of module installed. And there is no restriction in terms of system cabinets connected in parallel.
- User-friendly Mandarin/ English interface: Parameters setting for the event log, automatic error alarm and error record.
- Complete function setup: Automatic start-up for the self-inspection function. The soft start time can be set up and the nominal output can be limited.

2.4 Product Structure and Appearance

2.4.1 HMI Display

There are two kinds of HMI display. One is a 7" HMI touchscreen display (**Figure 2-4**) and another is a 10" HMI touchscreen display (**Figure 2-6**).

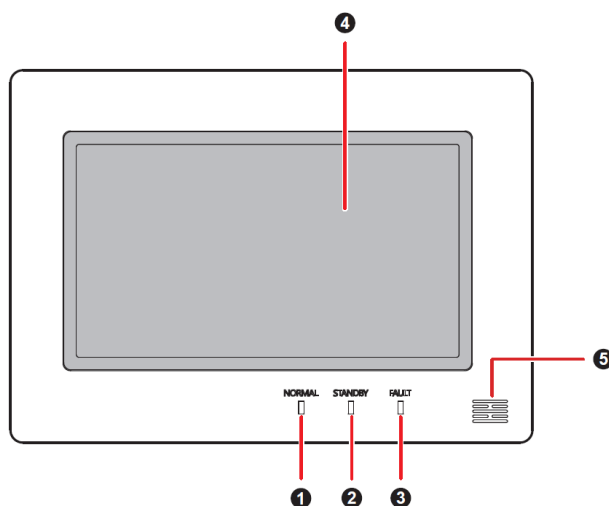

(Figure 2-4: PQC-HMI-F Front Side)

No.	Item	Description
①	NORMAL (Green)	When the light is on, the SVG operates normally.
②	STANDBY (Yellow)	When the light is on, the SVG is in standby mode.