


No.	Item	Description
①	Touchscreen	Users are able to perform operation through the touchscreen.
②	Tri-color LED	-When the green light is on, the device is operating normally. -When the yellow light is on, the device is in standby mode. -When the red light is on, the device is malfunctioning. When a single module is connected, and the yellow and red lights flash alternately, the device is malfunctioning and in standby mode. When the green, yellow and red lights flash alternately, the device is upgrading. When multiple modules are connected, and the yellow and green lights flash alternately, some devices are operating and the others are in standby mode. When the yellow and red lights flash alternately, some devices are malfunctioning and the other are in standby mode. When the green and red lights flash alternately, some devices are operating and the others are malfunctioning.
③	OUTPUT (Dry Contacts)	Output dry contact signals of system operation and other status.
④	INPUT (Wet Contacts)	Input wet contact signals of system temperature, EPO and other signals.
⑤	SYN-PWM (Synchronizing Signal Output Terminals)	For the synchronizing signals.
⑥	INTERNAL (MODBUS)	Communication port between the HMI and the module.
⑦	RESET	Reset button for the HMI.

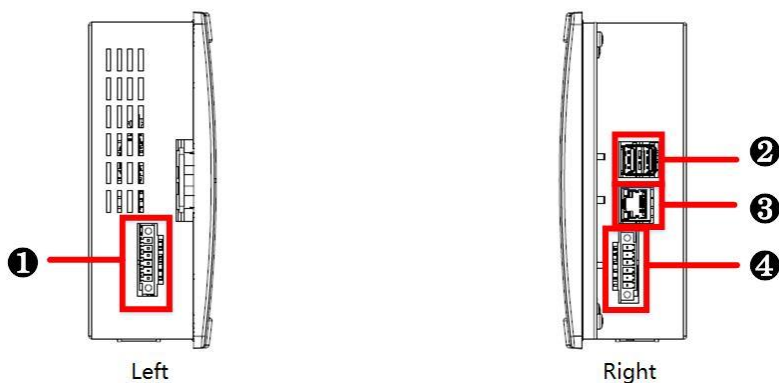

(Figure 2-7: PQC-HMI-F10 Left and Right Sides)