



Technical Data

Softcam Lathes V6 – V6PM – V6SR1A
Retrofitted on Escomatic® D6 – D6PM – D6SR Base Machines

Part Diameter 0.50 - 6.35 mm Part Length - 124 mm	Up To 13 Machining Operations	Machine Kinematics
Model V6 Retrofit of Escomatic® D6 3 Independent turning operations Fixed counter collet Model V6PM Retrofit of Escomatic® D6-PM 3 Independent turning operations Mobile counter collet Model V6SR1A Retrofit of Escomatic® D6-SR 3 Independent turning operations 4 Station turret for complex parts Mobile counter collet	Models V6 – V6PM– V6SR1A Turning & cutting Turning & knurling Model V6 Attachments for precise knurling and thread rolling Model V6-SR1A 4 Station turret for complex machining Front operations¹ Back operations² Transverse operations ¹Drilling, tapping, threading, thread rolling, milling, reaming ²Drilling, cross-drilling, milling, cross-milling	Model V6 3 Tool-head axes + 1 feed axis (Z1)  Model V6-PM 3 Tool-head axes + 1 feed axis (Z1) + 1 mobile counter collet axis (Z2) 
See Productivity Guide – Softcam Part 2 – Softcam CNC Control Software		
40+ pictograms and conversational programming For machine operators with and without Escomatic® experience		

3 Fully Independent Turning Tools

3 Servo-Motors – 3 Independent Axes
For More Complex Machining and More Complex Parts

For Parts
Up To Ø 6.35 mm
Diameter

Material Advance Controlled by Accurate Ball Screw

For Higher Precision and Larger Diameter Material

Optional 4 Station Turret

3 Independent Spindles – Mobile Counter Collet
For Front, Back and Transverse Operations

Specifications		
Capacity		
Maximum material diameter	0.250 in.	Ø 6.35 mm
Maximum length		
- With mobile counter collet or turret	2.440 in.	62 mm
- With double feeds, only with mobile counter collet	4.882 in.	124 mm
Range of cycle times		0.8 - 50 parts/min
Maximum diameter for counter collet attachment	0.250 in.	6.35 mm
Rotating Tool-head		
Number of tools in simultaneous operations		3
Maximum axial movement		4 mm
Standard cutting tool size		Ø 6 mm x 34 mm
Toolhead speed		3'150 to 7'100 RPM
Standard movement ratio for tools		1:5
Range of speeds for straightening attachment rotor		700 to 2'800 RPM



Ventura Mechanics SA
Rue du Verger 9
2014 Bôle
Switzerland

Tel +41 32 855 25 10
Fax +41 32 855 25 13
info@ventura-sa.com



Softcam V6 – V6PM– V6SR1A Lathes

Re-Engineered and Upgraded for Higher Performance

Higher Precision for –
Process Control
Length Tolerances
Part Quality

Material advance controlled by high precision,
high efficiency ball screw with servo-motor

Ball screw - ball bearings mechanism gives
more accurate positioning, and is faster and
more efficient with less friction

Replaces:
Conventional mechanical mechanism

Material Advance –
More Precise
More Robust
For Parts Up To Ø6.35 mm Diameter

Material feed controlled more accurately with
mobile collet

Larger and more robust feed collets for material
diameter up to Ø 6.35 mm

Compared to:
Feed rollers and Ø 4.0 mm diameter feed collets

3 Fully Independent Tools for –
More Complex Machining
More Complex Parts
Larger Diameter Parts

3 Independent tools
3 Servo-motors (one for each tool)
3 Independent axes

Compared to:
2 Independent tools + 1 dependent tool
2 Servo-motors (one for two tools)
2 Independent axes

4 Station Turret for –
More Flexibility
Higher Productivity
More Complex Machining

4 Station turret

3 Independent machining spindles




Mobile counter collet

Front, back and transverse operations

All Softcam V6 Models


Material advance
servo-motor and
straightener (open)

Absolute linear encoder for
precise control of length
(horizontal bar at front)

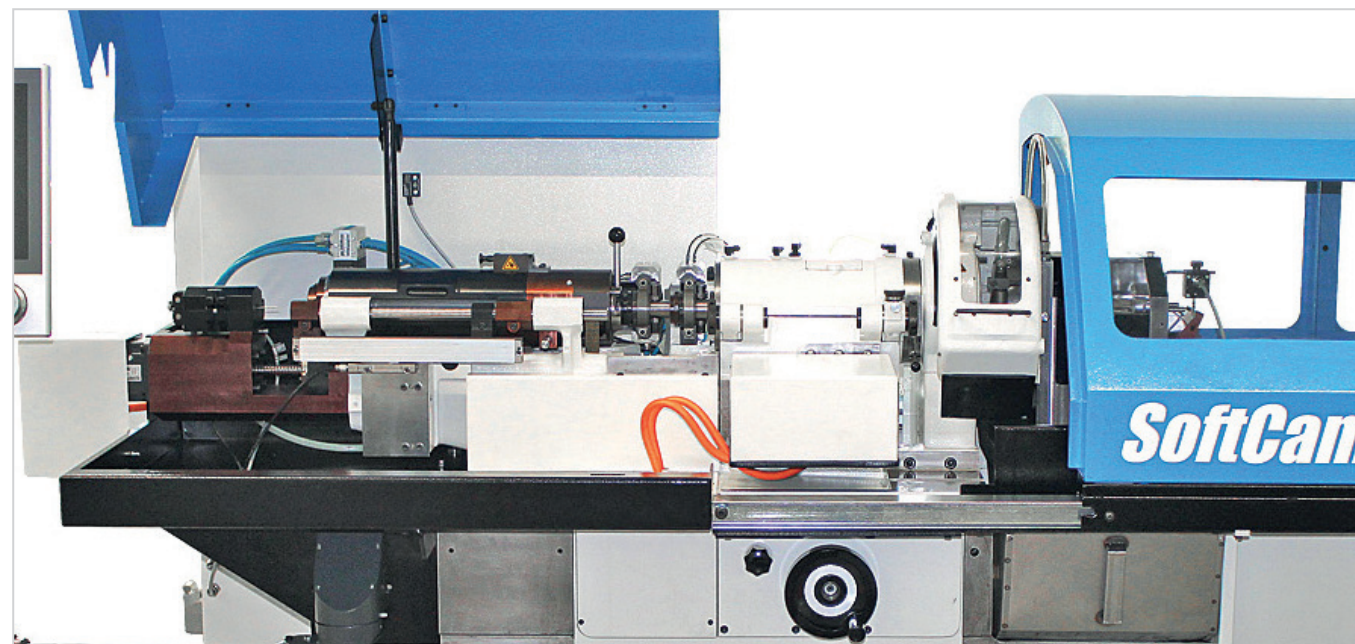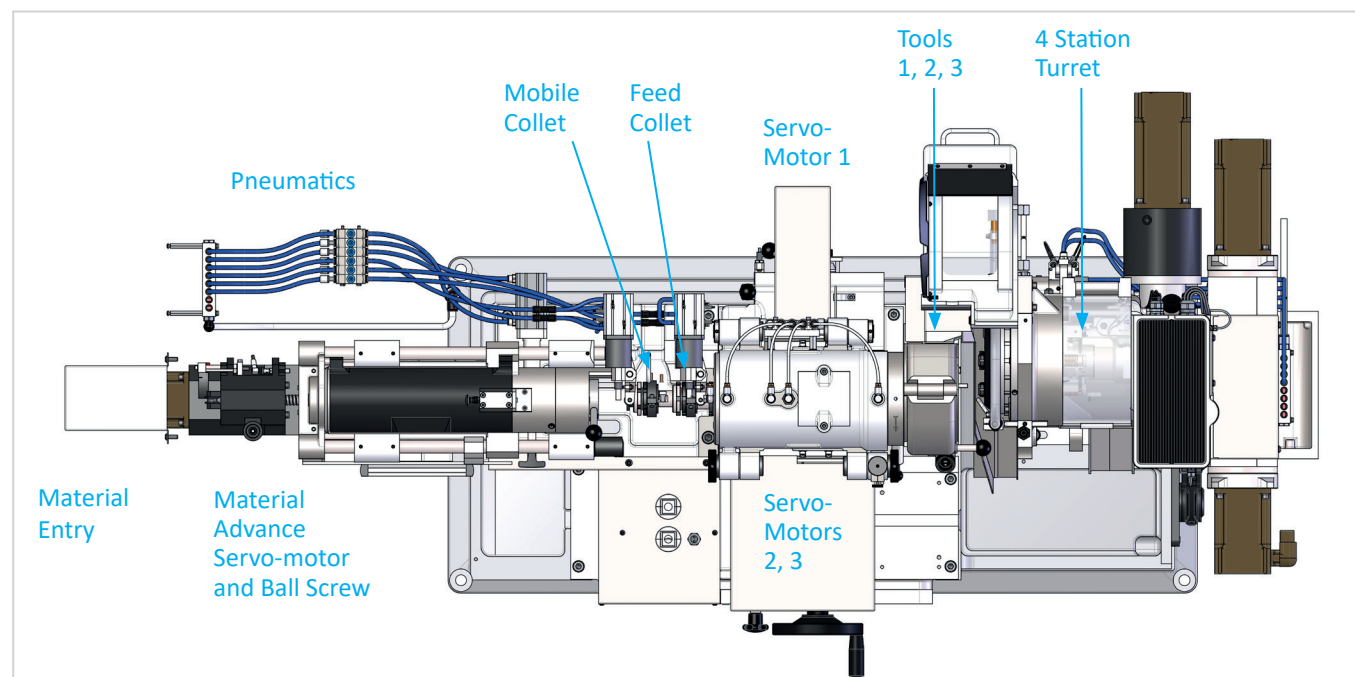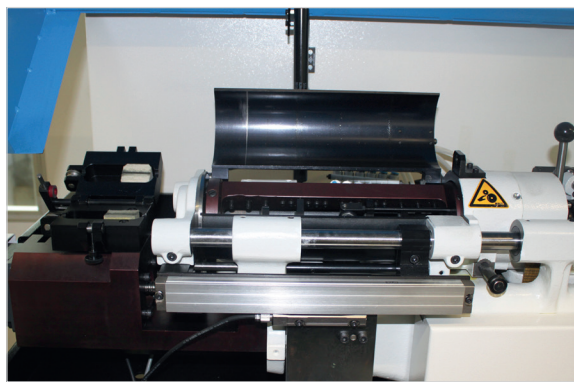

Softcam V6-SR1A with 4 Station Turret

4 Station turret for machining complex parts

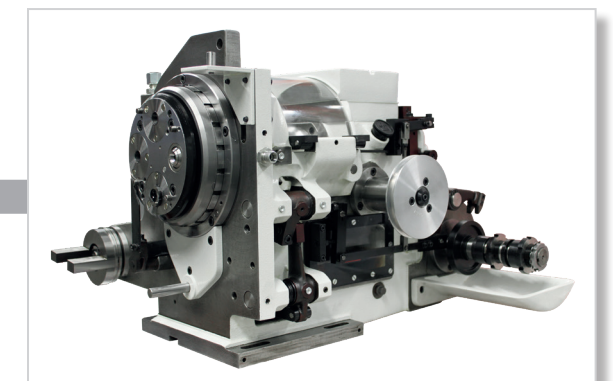

Softcam V6-PM with Mobile Counter Collet

Tool-head with 3
independent tools

Mobile
counter collet

