How can vector calculus be used to model and analyze incompressible fluid flow in two-dimensional spaces, and what insights can this provide about the vector fields of real-world fluid systems with circular obstacles?

Mathematics AA HL

Word Count: 481

Contents

1	Intr	ntroduction													2					
	1.1	Aim & scope												2						
	1.2	Background											2							
		1.2.1	Partia	l deri	vativ	es.														2
		1.2.2	The n	abla (opera	tor														4
		1.2.3	Direct	ional	deriv	ativ	æs													5
		1.2.4	Other																	5
	1.3	Fluid dynamics												5						
	1.4	Green's theorem										5								
2	References											7								
3	B List of Figures											7								

1 Introduction

Vector calculus provides the foundation and tools for the analysis and modeling of several real-world phenomona, and is integral to understanding several important fields such as aero- & hydrodynamics, as well as the modeling of weather & climates.

Through the use of pure mathematics, this essay will investigate the flow of fluids in 2 dimensional spaces around circular obstacles. Visual representations through mediums such as vector field plots (plotted through a custom program

1.1 Aim & scope

This essay will for simplicity's sake only cover fluid flow around circular obstacles in \mathbb{R}^2 spaces; an alaysis of fluid flow in \mathbb{R}^3 spaces would be much more complex. Furthermore, only incompressible fluids sans sinks and sources $(\mathbf{F} \ni \nabla \cdot \mathbf{F} = 0)$, will be analyzed.

Most of the analysis will take place using Green's theorem^[see 1.4].

1.2 Background

Vector calculus is the mathematical study of applying multi-variable calculus to vector valued functions, often for the spaces \mathbb{R}^2 and \mathbb{R}^3 .

1.2.1 Partial derivatives

One dimensional calculus provides the tools for finding the slope of some function f at some point through the derivative. For example, the equation

of the slope of the function $f(x) = x^2$ at some point can be calculated using the formal definition of a deriative:

$$\frac{\mathrm{d}f}{\mathrm{d}x} = \lim_{h \to 0} \frac{f(x+h) - f(x)}{h}$$
The formal definition of a derivative (1)

$$f(x) = x^{2} \to \frac{\mathrm{d}f}{\mathrm{d}x} = \lim_{h \to 0} \frac{(x+h)^{2} - (x)^{2}}{h}$$

$$= \lim_{h \to 0} \frac{x^{2} + 2xh + h^{2} - x^{2}}{h}$$

$$= \lim_{h \to 0} \frac{2xh + h^{2}}{h}$$

$$= \lim_{h \to 0} 2x + h = 2x$$

More conveniently, Lagrange's notation for the derivative is often used to avoid excessive writing.

$$\frac{\mathrm{d}f}{\mathrm{d}x} \equiv f'(x)$$

For the purposes of this essay, the formal definition of a derivative will not be used to calculate each derivation, rather common patterns and rules (such as the power rule, product rule, etc.) will be used.

Multi-variable calculus introduces the partial derivative, which functions the same as a normal derivative but treats all variables except for the one being differentiated by as constants, allowing for the derivation of multivariable functions.

$$f(x,y) = x^2 + y^2 \implies \frac{\partial f}{\partial x} = 2x$$
 (power rule)

However, the partial derivative only provides part of the picture, since it only takes into consideration one variable. Defining one single full picture "derivative" of a multi-variable function is not possible, since there are an infinite number of "slopes" at some point, and what you want the derivative to achieve will depend on your goal (e.g. what direction you want to differentiate in).

1.2.2 The nabla operator

The nabla operator finds the direction of steepest ascent, i.e. it gives a vector pointing in what direction gives the greatest change in some function f.

The nabla (alt. gradient) operator, denoted by the symbol ∇ (pronounced nabla or grad), is thereby defined for some function $f: \mathbb{R}^n \to \mathbb{R}^m$ as:

$$\nabla = \begin{bmatrix} \frac{\partial}{\partial x} \\ \frac{\partial}{\partial y} \\ \frac{\partial}{\partial z} \\ \vdots \end{bmatrix}$$
 $n \text{ times}$ (2)

Aplying this to our previous example $f(x,y) = x^2 + y^2$, we get:

$$\nabla f = \begin{bmatrix} \frac{\partial}{\partial x} x^2 + y^2 \\ \frac{\partial}{\partial y} x^2 + y^2 \end{bmatrix} = \begin{bmatrix} 2x \\ 2y \end{bmatrix}$$

Meaning that at some point (x, y), the direction of steepest incline will be 2(x, y). The nabla operator proves foundational to vector calculus and is the backbone of several important concepts.

1.2.3 Directional derivatives

We now see how partial derivatives in 1-dimensional directions like x and y, as well as the slope of greatest ascent, can be calculated, and by combining these concepts we can calculate the derivative of some function f in any vector-based direction \vec{v} .

1.2.4 Other

$$f: \mathbb{R}^n \to \mathbb{R}^n \ni n > 1, n \in \mathbb{Z}$$

$$\frac{\mathrm{D}f}{\mathrm{D}t} \triangleq \frac{\partial f}{\partial t} + \underbrace{\vec{v} \cdot \nabla f}_{\text{Directional derivative } \nabla_{\vec{v}} f}$$

$$\vec{v_1} \otimes \vec{v_2}$$

$$(3)$$

1.3 Fluid dynamics

An incompressible fluid is any fluid such that $\nabla \cdot \mathbf{F} = 0$, which is to say that the divergence of the fluid is 0.

1.4 Green's theorem

Green's theorem 1. The double integral over some reigon R of the curl of a vector field \mathbf{F} is equal to the line integral over some curve C of \mathbf{F}

$$\int_{C} \mathbf{F} \cdot d\mathbf{r} = \iint_{R} \left(\frac{\partial Q}{\partial x} - \frac{\partial P}{\partial y} \right) dA$$

$$\iint_{R} \nabla \times \mathbf{F} dA = \oint_{C} \mathbf{F} \cdot d\mathbf{r}$$

$$\frac{\mathrm{D}f}{\mathrm{D}\mathbf{t}} = \iiint_{V} \left(\frac{\mathrm{D}\rho}{\mathrm{D}\mathbf{t}} + \rho(\nabla \cdot u)\right) dV \tag{4}$$

Lorem ipsum dolor sit amet [Peyret and Taylor, 2012]

2 References

[Peyret and Taylor, 2012] Peyret, R. and Taylor, T. D. (2012). Computational methods for fluid flow. Springer Science & Business Media.

3 List of Figures

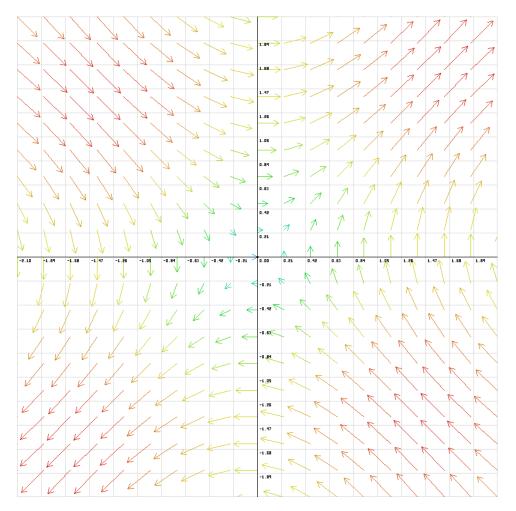


Figure 1: Vector field for $f(x,y) = \begin{pmatrix} \sin y \\ \sin x \end{pmatrix}$

$$\mathbf{F}(t) : \mathbb{R} \to \mathbb{R}^2$$

$$\leadsto \mathbf{P}(t, \vec{p}) = \vec{p} + \hat{\imath} \iint_0^t \mathbf{F}_x \, dt + \hat{\jmath} \iint_0^t \mathbf{F}_y \, dt$$

$$\mathbf{P}(t, \vec{p}) = \vec{p} + \iint_0^t \hat{\imath} \mathbf{F}_x + \hat{\jmath} \mathbf{F}_y \, dt$$

$$\hat{\jmath} + \hat{\imath}$$

$$A = B$$

= C

substitution

Proof. Green's Theorem

$$B \stackrel{\Delta}{=} C$$

$$A = B$$

$$= C$$

 $a \underbrace{a}_{\text{banana}}$