


Head support bracket provided where fixing is inboard of the carrier track (folding doors only)

Door frames wider than $19'8'\frac{1}{4}"$ [6000mm] are supplied with a joiner to head and sill.

3a. jamb detail

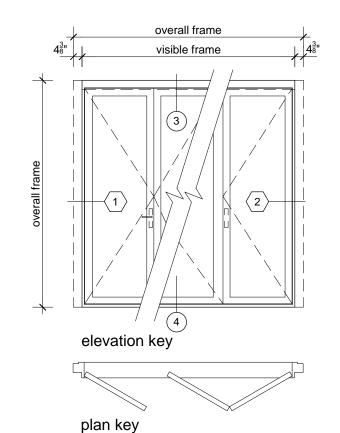

| | 205 series |
|----------------------|---|
| overall frame height | 6'6 ¹ / ₄ " [1987] - 9'5 ¹ / ₂ " [2884] |
| overall frame width | $4'8\frac{1}{2}$ " [1434] - 30"11 $\frac{3}{8}$ "[9434] |
| visible frame width | 3'11 ³ / ₄ " [1214] - 30'2 ³ / ₄ " [9214] |
| door panel height | 6' ⁵ " [1846] - 9' [2743] |
| door panel width | 1'10g" [575] - 3'3g" [1000] |

1 screen/shade box 6 screen stile

2 door panel stile 7 screen/blind


3 glazing8 lever handle4 top rail9 pivot

6 bottom rail


Door frames up to 16' (4877mm) in width can be supplied with a different fabric type in each jamb box.


Door frames wider than 16' (4877mm) are only available with a single fabric type.

legend

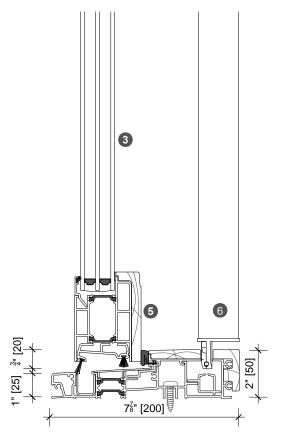

4. sill detail

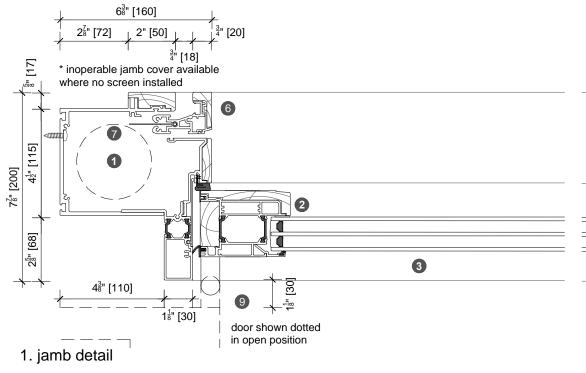

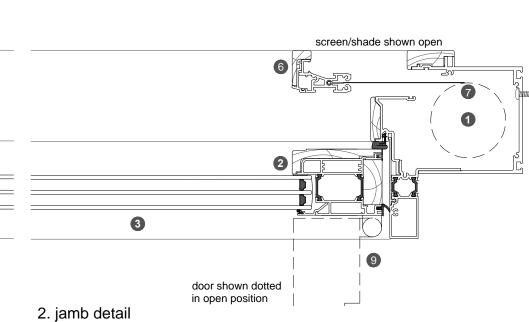

 Date
 28 July 2015
 Pages
 1 of 1
 Page size tabloid

 Dwg No
 AD_NAM_205.01
 Scale
 3":1' - 1/4":1'
 Rev
 I

