

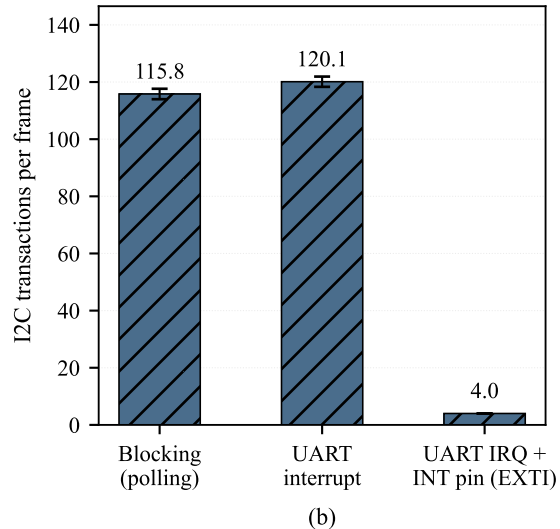
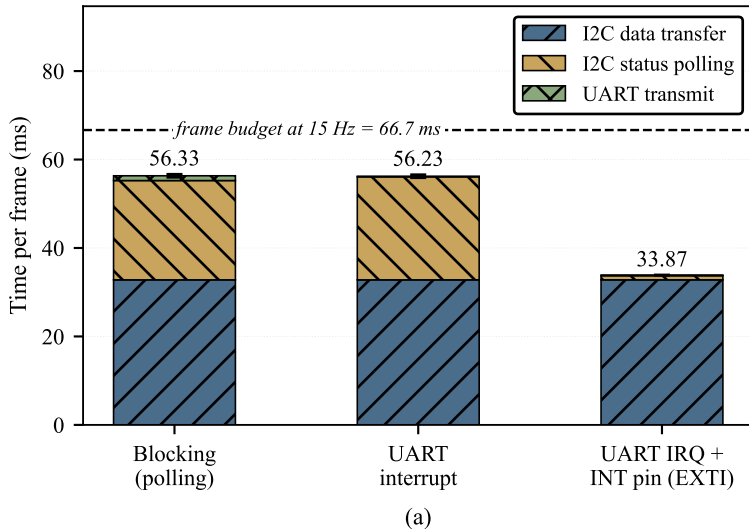


Fig. 1. Per-frame latency of the VL53L8CX-to-STM32F411RE link under three driver configurations.
(a) Latency breakdown; (b) number of I²C transactions per frame. Error bars show ± 1 SD.
8 $\times$ 8 resolution at 15 Hz, I²C 400 kHz, CPU 84 MHz, n = 7986 frames.