



CATALOGUE 2023

BRAND CONCEPT

RYU is a power tool series made to meet the needs for reliable power tools, engine, welding and accessories in multiple segments, ranging from engineering and building to automotive industry and household. Our motto is Quality, Guarantee and Advantageous. This motto implies that consumers who use our quality products will get guarantee of warranty so that they feel comfortable and safe when using **RYU**. Furthermore, at an affordable price, consumers will gain more benefit because they can own power tool products they want without having to spend more.

RYU has set up service centers in major cities such as Jakarta, Bandung, Surabaya, Makassar, Denpasar, Manado and other cities in order to guarantee our products warranty. All **RYU** products are supported by continuous innovation and reliable technology developed to meet our consumers' needs.

TABLE OF CONTENTS

Brand Concept	_____	1
Table Of Contents	_____	2
Service center	_____	3
Powertools	_____	4 - 36
Cordless	_____	37 - 45
Accessories	_____	46 - 65
Engine	_____	66 - 77
Welding	_____	78 - 82
Sparepart	_____	78 - 82

SERVICE CENTER

SPAREPART CENTER MUARA BARU

GANG MARLINA NO.12 B MUARA BARU
TELP : (021) 26081377

SPAREPART CENTER SAMARINDA

JL. ELANG NO.86E SAMARINDA 75115
KALIMANTAN TIMUR
TELP : (0541) 4121573

SPAREPART CENTER LTC

LINDETEVES TRADE CENTER LANTAI GF2
BLOK C27 NO.7/8 JAKARTA
TELP : (021) 62316756

SPAREPART CENTER PEKANBARU

JL. KURAS NO. 3C, PEKANBARU
TELP : (0761) 45762

SPAREPART CENTER BANDUNG

JL. LENGKONG KECIL NO.30 B
BANDUNG, JAWA BARAT
TELP : (022) 20512433

SPAREPART CENTER MAKASSAR

JL. SUMBA NO. 15 A
KEL. PATTUNUANG KEC. WAJO, MAKASSAR
TELP : (0411) 8001985

SPAREPART CENTER SURABAYA

KOMPLEK RUKO ATOM MEGAH
JL. GEMBONG NO.38 H KAPASAN SURABAYA
TELP : (031) 3725631

SPAREPART CENTER MEDAN

JL. PANDU NO.10 KEL. AUR KEC. MEDAN MAIMUN
MEDAN, SUMATERA UTARA
TELP : (061) 4578218

SPAREPART CENTER MANADO

JL. PIERE TENDEAN BOULEVARD
MEGA MAS BLOK SMART 2 NO.4
MANADO, SULAWESI UTARA
TELP :

SPAREPART CENTER PONTIANAK

JL. TANJUNG PURA NO.206A RT.004/03
BENUA MELAYU LAUT, PONTIANAK SELATAN
PONTIANAK
TELP : (0561) 8179785

SPAREPART CENTER LAMPUNG

JL. IKAN TENGGIRI NO.124 LK II RT.023
KEL. PESAWAHAN KEC. TELUK BETUNG
SELATAN BANDAR LAMPUNG
TELP : (0721) 481711

SPAREPART CENTER SEMARANG

JL. DR CIPTO NO.6C RW.05
KEL. KEBON AGUNG KEC. SEMARANG TIMUR
SEMARANG 50123
TELP : (024) 86403374

SPAREPART CENTER PALEMBANG

JL DR. M .ISA NO 11,DUKU,KEC. ILIR TIMUR II
KOTA PALEMBANG 30114
TELP : (0711) 7443927

SPAREPART CENTER BALI

JL. GATOT SUBROTO NO.244C
KEL. TONJA KEC. DENPASAR UTARA
KOTA DENPASAR, BALI
TELP : (0361) 9077660

SPAREPART CENTER BANJARMASIN


JL. SOETOYO S NO.155 RT.034/003
KEL.TELUK DALAM KEC. BANJARMASIN TENGAH
BANJARMASIN, KALIMANTAN SELATAN
TELP : (0511) 4245537

SPAREPART CENTER JAMBI

JL. HOS COKROAMINOTO, NO. 26 SIMPANG
KAWAT, KOTA BARU, PAYO LEBAR, JELUTUNG,
KECAMATAN JELUTUNG, KOTA JAMBI, JAMBI
36135
TELP : +62 741 3618585



POWER TOOLS

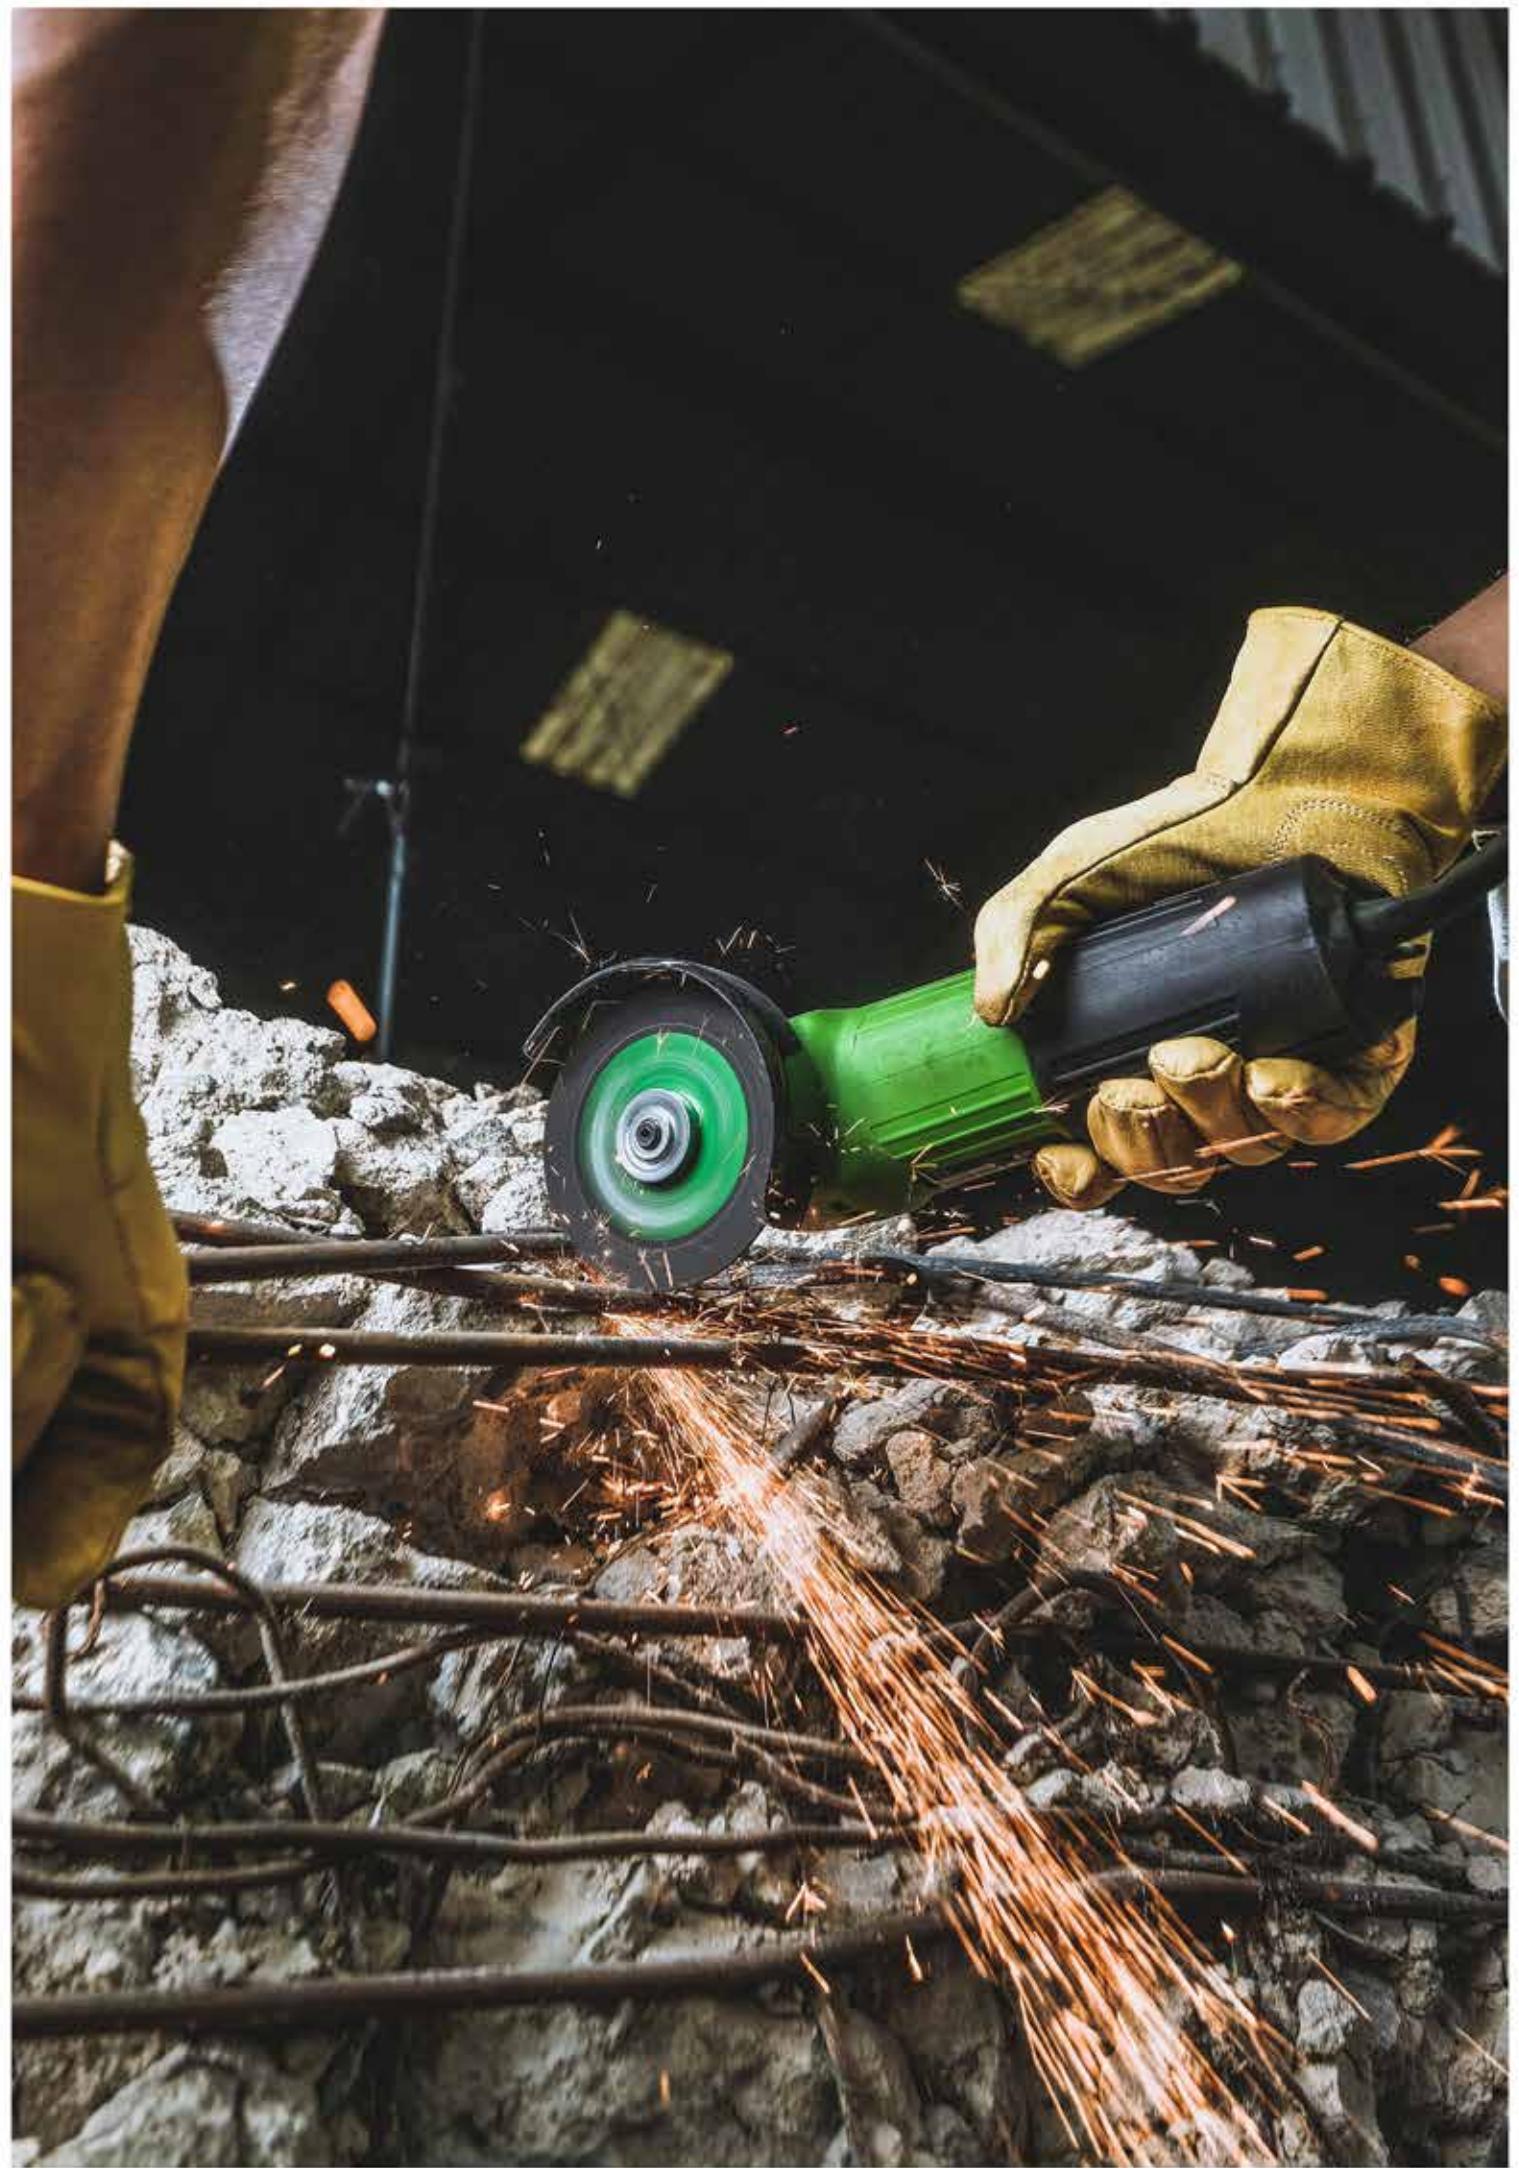

RSG100-3 ANGLE GRINDER 4"



Selling Point Information

- Motor with High Performance
- Powerful 580W Motor
- Rotatable Housing
Can be flexible positioned to most cutting and grinding operations.
- Small body grip for easy handling

SAFETY INSTRUCTION



INCLUDE : User Manual, Warranty Card, Safety Cover Guard, Key Luck Nuts, 2 Pcs Carbon Brush

TECHNICAL INFORMATION

The RSG100-3 grinder is a compact, high performance and high-quality tool for the highest demands on cutting and polishing jobs anywhere in the home, workshop and garage. equipped with a motor that is quiet but efficient in electricity usage and the selection of a quality body adds comfort when using is not slippery. equipped with Bullet Proof Guard For maximum safety even when discs break and Rear toggle switch easy to operate for user.

SPECIFICATION

Continuous rating input	: 580 W
Depressed center wheel	: 100 mm (4")
Wire cup brush	: 75 mm(2")
Abrasive disc	: 100 mm(4")
Diamond wheel	: 110 mm(4-3/8")
No Load Speed	: 11,000 rpm
Nett weight	: 1.8 Kg

RSG100-4 ANGLE GRINDER 4"



INCLUDE : User manual, Warranty card, Safety cover guard, Key lock nuts, 2 Pcs carbon brush

SPECIFICATION

Continuous rating input Capacity	: 580 W
Depressed center wheel	: 100 mm(4")
Wire cup brush	: 75 mm(3")
Abrasive disc	: 100 mm(4")
Diamond wheel	: 110 mm(4-3/8")
No Load Speed	: 11,000 rpm
Weight	: 1.9 kg
Voltage	: 220 V
Frequency	: 50-60 Hz
Ampere	: 2.6 A

Packaging Information

Case Qty	: 10 pcs/ctn
G.W/N.W	: 22 Kg/20.5 kg
Packaging Size	: 54 cm x 29 cm x 23 cm

- Motor with High Performance
- Powerful 580W Motor
- Rotatable Housing
- Can be flexible positioned to most cutting and grinding operations.
- Small body grip for easy handling
- With Slider Switch

RSG100-5V ANGLE GRINDER VARIABLE 4"



INCLUDE : User manual, Warranty card, Safety cover guard, Key lock nuts, 2 Pcs carbon brush

SPECIFICATION

Continuous rating input Capacity	: 840 W
Depressed center wheel	: 100 mm(4")
Wire cup brush	: 75 mm(3")
Abrasive disc	: 100 mm(4")
Diamond wheel	: 110 mm(4-3/8")
No Load Speed	: 0 - 11,000 rpm
Weight	: 2.4 kg
Voltage	: 220 V
Frequency	: 50-60 Hz
Ampere	: 3.8 A

Packaging Information

Case Qty	: 10 pcs/ctn
G.W/N.W	: 22 Kg/20.5 kg
Packaging Size	: 58 cm x 36 cm x 24 cm

- Motor with High Performance
- Powerful 840W Motor
- Rotatable Housing
- Can be flexible positioned to most cutting and grinding operations.
- Small body grip for easy handling
- With Variable Switch

RSG125 ANGLE GRINDER 5"



SPECIFICATION

Continuous rating input Capacity	: 840 W
Depressed center wheel	: 125 mm(5")
Wire cup brush	: 75 mm(3")
Abrasives disc	: 100 mm(4")
Diamond wheel	: 110 mm(4-3/8")
No Load Speed	: 11,000 rpm
Weight	: 2.4 kg
Voltage	: 220 V
Frequency	: 50-60 Hz
Ampere	: 3.8 A

Packaging Information

Case Qty	: 10 pcs/ctn
G.W/N.W	: 24 Kg/22 kg
Packaging Size	: 59 cm x 36 cm x 24 cm



INCLUDE : User manual, Warranty card, Safety cover guard, Key lock nuts, 2 Pcs carbon brush, Handle Grip, 1 pc Grinding Wheel 5", 2 Pcs Cutting Wheel 5"

RSG180 ANGLE GRINDER 7"



SPECIFICATION

Continuous rating input Capacity	: 2200 W
Depressed center wheel	: 180 mm(7")
No Load Speed	: 11,000 rpm
Weight	: 6.5 kg
Voltage	: 220 V
Frequency	: 50-60 Hz
Ampere	: 10 A


Packaging Information

Case Qty	: 2 pcs/ctn
G.W/N.W	: 13 Kg/11 kg
Packaging Size	: 57 cm x 27 cm x 18 cm




INCLUDE : User manual, Warranty card, Safety cover guard, Key lock nuts, 2 Pcs carbon brush, L Key, Handle Grip

- Motor with High Performance
- Powerful 2200W Motor
- Rotatable Housing
- Can be flexible positioned to most cutting and grinding operations.
- Small body grip for easy handling
- With Slider Switch

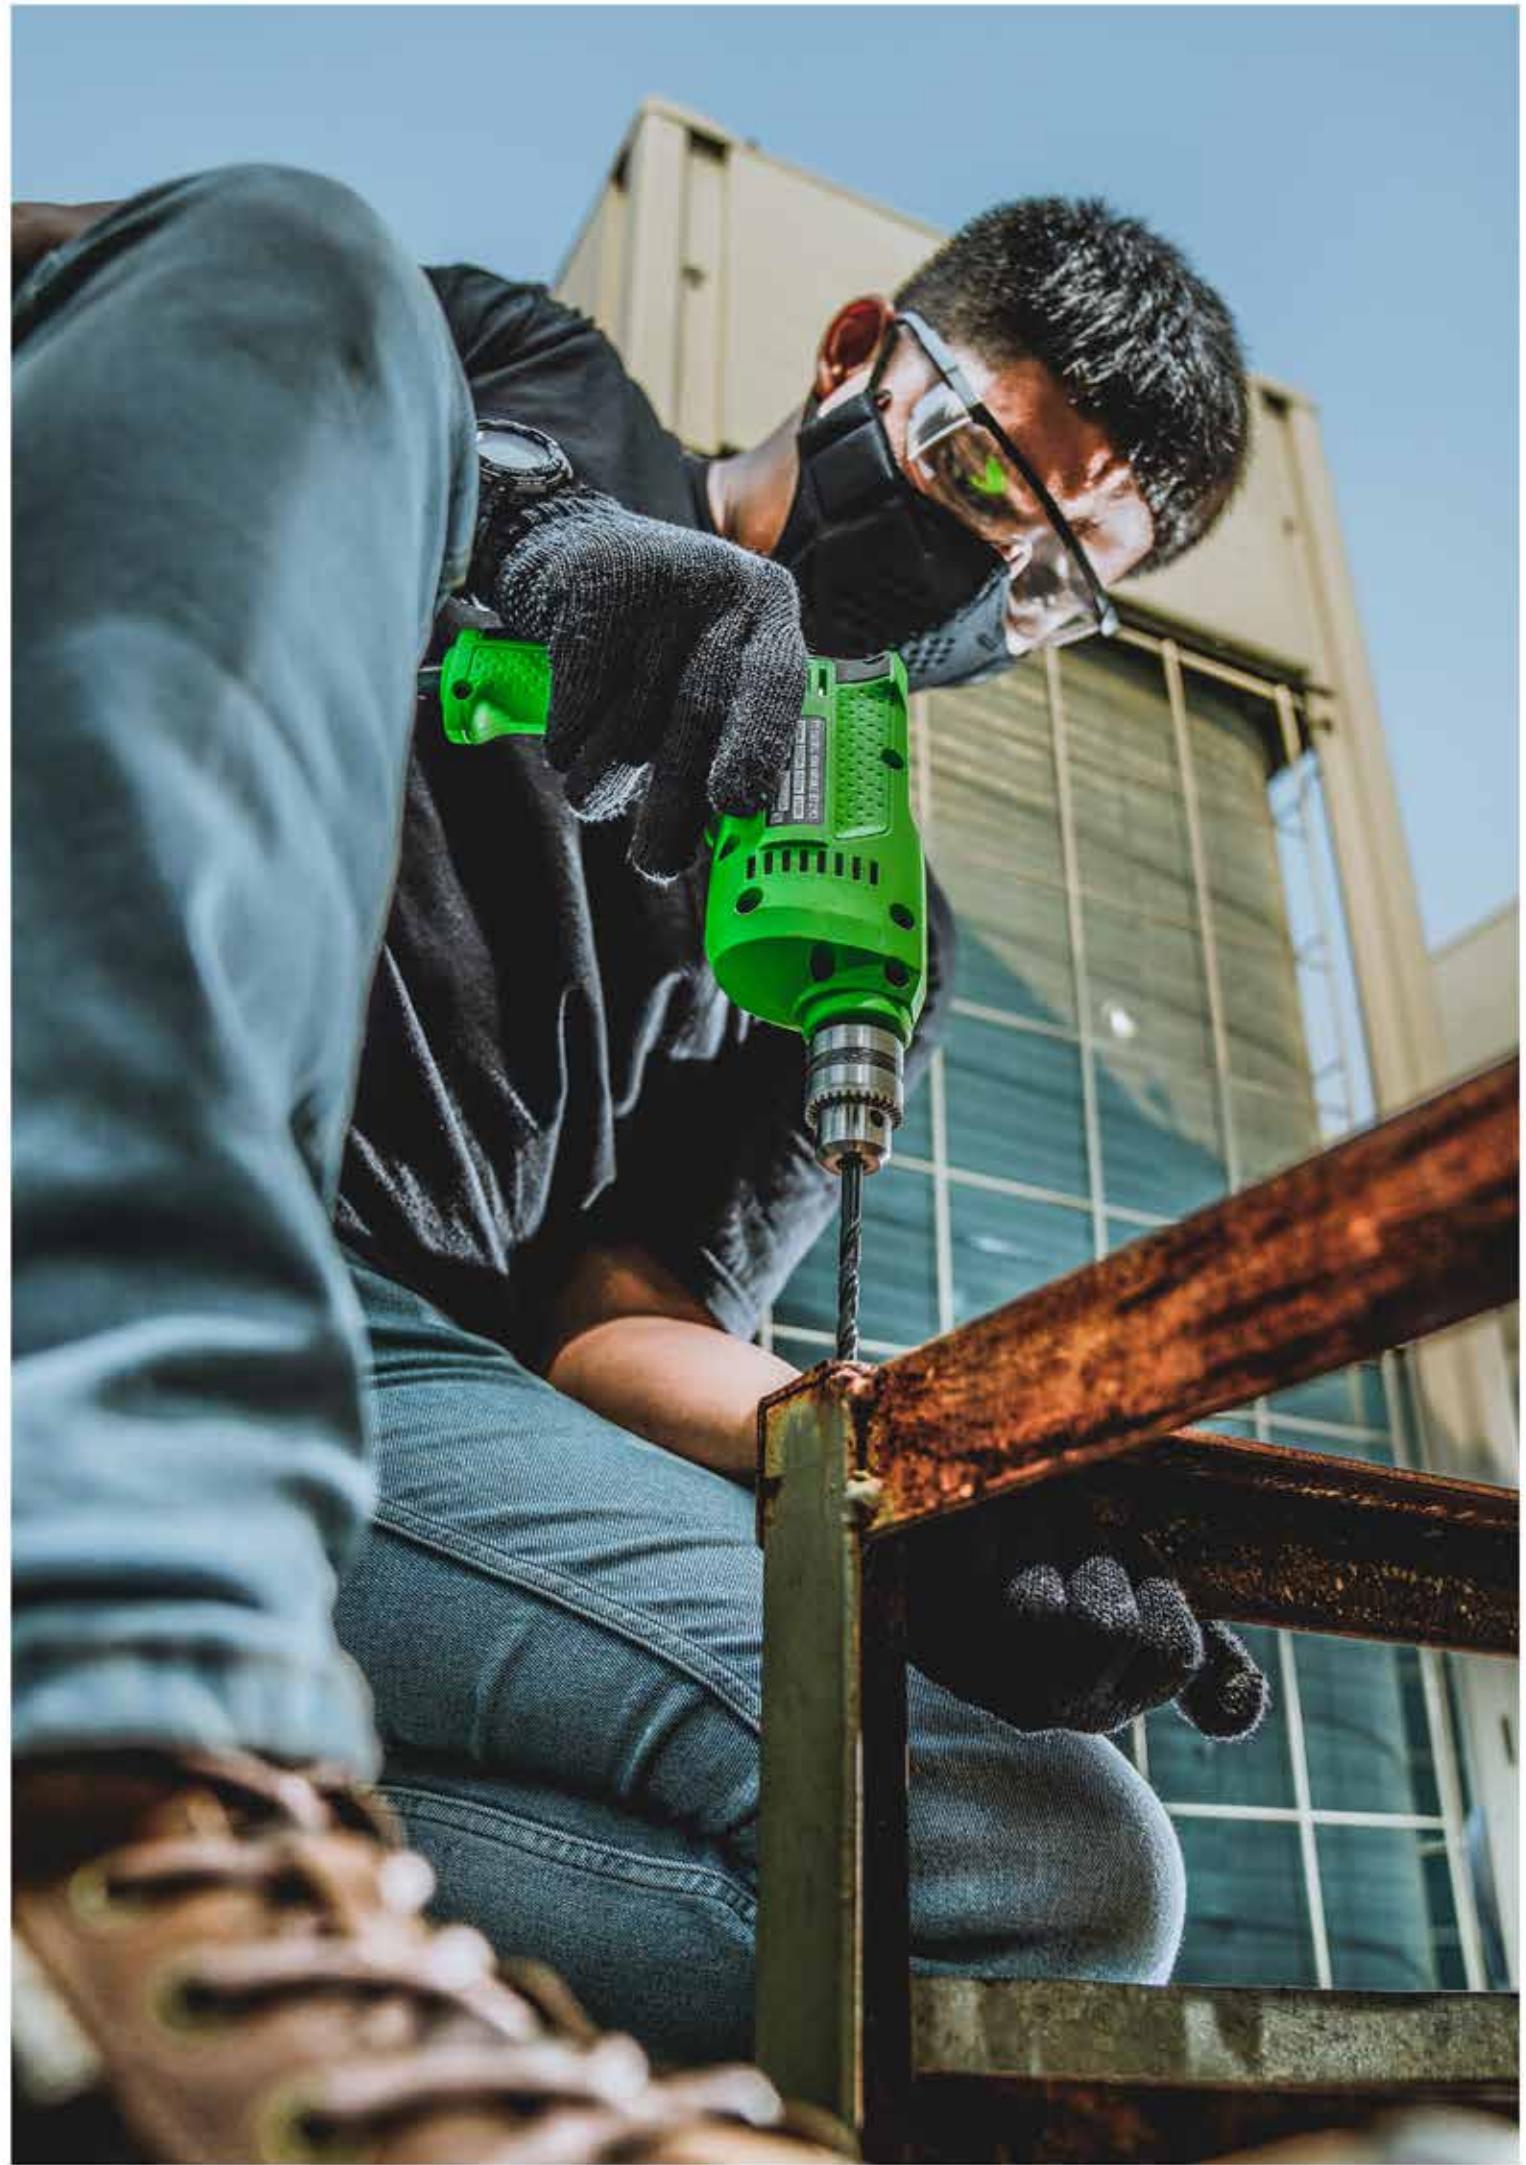

RDR10-3RE

DRILL 10MM VARIABLE

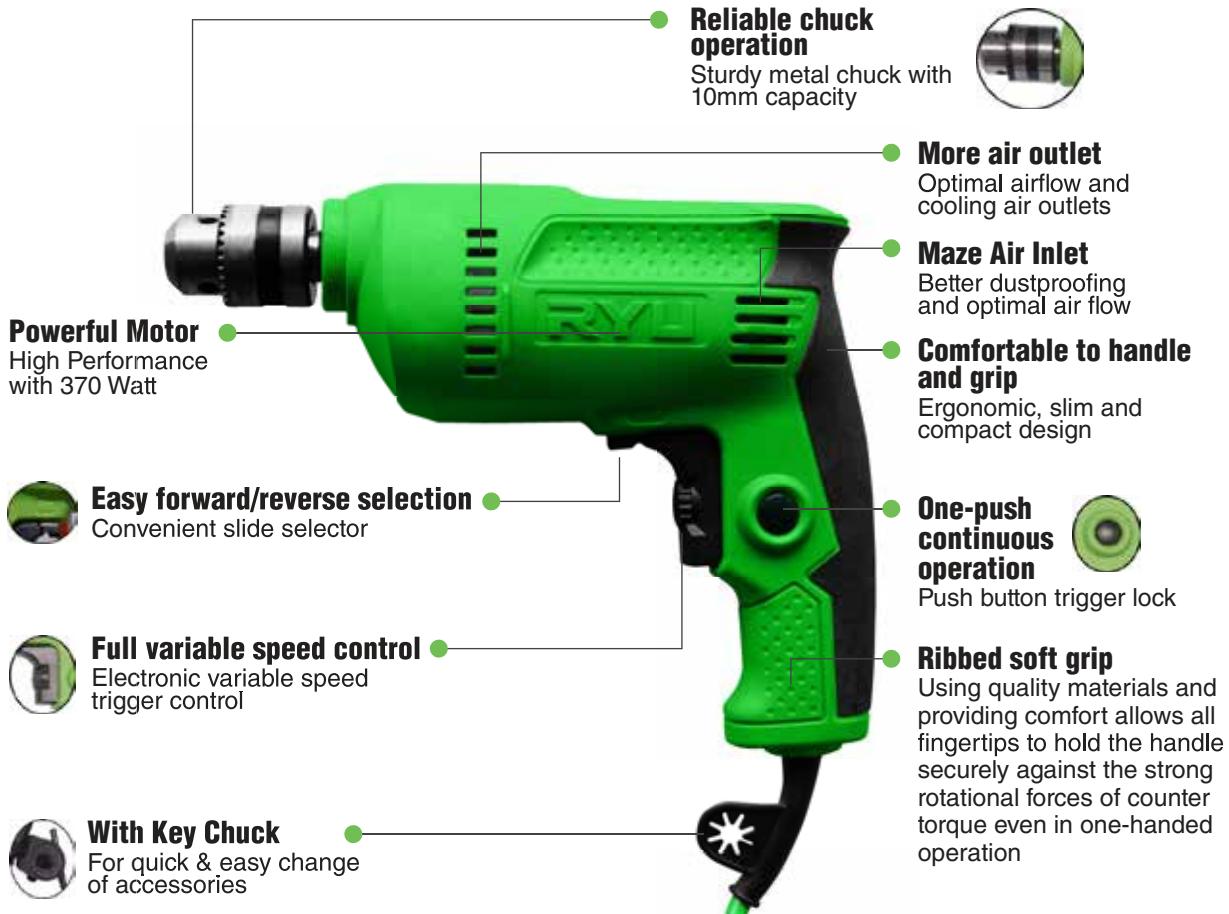

Selling Point Information

- Switch Lock
- Double Insulation
- Rubberised Grip
- Powerful, Compact and Lightweight
- Variable Speed Switches

SAFETY INSTRUCTION



INCLUDE : User Manual, Warranty Card, Key Chuck, 2 Pcs Carbon Brush

TECHNICAL INFORMATION

The RYU (UN) DRILL 10MM VARIABLE RDR10-3RE is a high performance, compact, and high quality for the highest requirements in drilling work, suitable for application in homes, workshops and garages. Equipped with variable speed control to set the desired rotation speed and a powerful motor for optimal performance and long service life. Good power transmission is guaranteed by high power and high torque motor with reversing facility.

SPECIFICATION

Drill Capacity	: 10mm
No Load Speed	: 0 - 3200 rpm
Rate Input Power	: 370 W
Rate Voltage	: 220VAC
Frequency	: 50/60Hz
Dia. Drilling in wood	: 10 mm
Dia. Drilling on iron	: 10 mm
Packaging Information	
Case Qty	: 10pcs/ctn
G.W/N.W	: 16.7Kg/15.0kg
Packaging Size	: 52.5cm x 37cm x 28cm

RID13-1RE IMPACT DRILL



INCLUDE : User Manual, Warranty Card, Key Chuck, Handle Grip, Depth Limiting Stick, 2 Pcs Carbon brush

SPECIFICATION

Drill Capacity	: 13 mm
No Load Speed	: 0 - 2,800 rpm
Rate Input Power	: 600 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 2.7 A
Dia. Drilling in wood	: 16 mm
Dia. Drilling on iron	: 13 mm
Dia. Drilling on Beton	: 13 mm
Weight	: 2.2 kg

Packaging Information

Case Qty	: 10 pcs/ctn
G.W/N.W	: 22 Kg/20.5 kg
Packaging Size	: 55 cm x 42 cm x 28 cm

- High Speed Drilling
- High Performance Motor
- Double Insulation
- Variable Speed Switches

RID13-2RE IMPACT DRILL



INCLUDE : User Manual, Warranty Card, Key Chuck, Handle Grip, Depth Limiting Stick, 2 Pcs Carbon brush

SPECIFICATION

Drill Capacity	: 13 mm
No Load Speed	: 0 - 3200 rpm
Rate Input Power	: 710 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 3.2A
Dia. Drilling in wood	: 16 mm
Dia. Drilling on iron	: 16 mm
Dia. Drilling on Beton	: 13 mm
Weight	: 2.6 kg

Packaging Information

Case Qty	: 5 pcs/ctn
G.W/N.W	: 13.5 Kg/12.0 kg
Packaging Size	: 42 cm x 30 cm x 31 cm

- High Speed Drilling
- High Performance Motor
- Double Insulation
- Variable Speed Switches

RDR10-3REB DRILL 10 MM VARIABLE SET 22 PCS



INCLUDE : User Manual, Warranty Card, 2 Pcs Carbon Brush, SDS Drill 1.5, 3, 4, 5, 6, 8 mm, Spur Bits Drill 5, 6 mm, Measurement Tape, Knife Cutter, Pencil, Two Way Screwdriver, 5 Pcs Grinding Head, Glove, Screw, Fisher

SPECIFICATION

Drill Capacity	: 10 mm
No Load Speed	: 0 - 3,200 rpm
Rate Input Power	: 370 W
Rate Voltage	: 220 VAC
Frequency	: 50/60Hz
Dia. Drilling in wood	: 10 mm
Dia. Drilling on iron	: 10 mm
Weight	: 2.4 kg

Packaging Information

Case Qty	: 5 pcs/ctn
G.W/N.W	: 12.7 Kg/10.7 kg
Packaging Size	: 45 cm x 30 cm x 29 cm

- Switch Lock
- Double Insulation
- Rubberized Grip
- Powerful, Compact and Lightweight
- Variable Speed Switches

RID13-1REB IMPACT DRILL 13 MM SET 27 PCS



INCLUDE : User Manual, Warranty Card, 2 Pcs Carbon Brush, Masonry Drill 3, 4, 5, 6, 8 mm, SDS Drill 1.5, 3, 4, 5, 6, 8 mm, Spur Bits Drill 5, 6 mm, Measurement Tape, Knife Cutter, Pencil, Two Way Screwdriver, 5 Pcs Grinding Head, Glove, Screw, Fisher

RRH26 ROTARY HAMMER



INCLUDE : User manual, Warranty Card, Handle Grip, Depth Limiting Stick, SDS Plus 8MM,10MM,12MM, 1 Pc SDS Plus Pointed Chisel, 1 Pc SDS Plus Flat Chisel

RRH32 ROTARY HAMMER



INCLUDE : User Manual, Warranty Card, Handle Grip, Depth Limiting Stick, 1 PC Hexagon Flat Chisel

SPECIFICATION

Drill Capacity	: 13 mm
No Load Speed	: 0 - 2,800 rpm
Rate Input Power	: 600 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 2.7 A
Dia. Drilling in wood	: 16 mm
Dia. Drilling on iron	: 13 mm
Dia. Drilling on Beton	: 13 mm
Weight	: 3.10 kg

Packaging Information

Case Qty	: 5 pcs/ctn
G.W/N.W	: 15,5 Kg/13,5 kg
Packaging Size	: 45 cm x 30 cm x 29 cm

- High Speed Drilling
- High Performance Motor
- Double Insulation
- Variable Speed Switches
- Ergonomic Handle

SPECIFICATION

Chuck Capacity	: 26 mm
No Load Speed	: 0 - 1,500 rpm
Input Power	: 850 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 3.8A
Weight	: 5.3 kg

Packaging Information

Case Qty	: 4 pcs/ctn
G.W/N.W	: 21.5 Kg/19.5 kg
Packaging Size	: 46 cm x 43 cm x 30 cm

- Sliding Lock Chuck
- High Performance Motor
- Double Insulation
- Multi-Function knob

SPECIFICATION

Chuck Capacity	: 32 mm
Impact Rate	: 800 bpm
Input Power	: 1050 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 4.7A
Weight	: 7.6 kg

Packaging Information

Case Qty	: 3 pcs/ctn
G.W/N.W	: 23 Kg/21kg
Packaging Size	: 53 cm x 38 cm x 36 cm

- Sliding Lock Chuck
- High Performance Motor
- Double Insulation
- Multi-Function knob

RDH15 DEMOLITION HAMMER



INCLUDE : User Manual, Warranty Card, Handle Grip, Depth Limiting Stick, 2 Pcs Carbon Brush, Key Chuck, L Key, 1 Pc Hexagon Pointed Chisel, 1 Pc Hexagon Flat Chisel

SPECIFICATION

Input Power	: 1200 W
Impact Rate	: 2,900 bpm
Impact Energy	: 15J
Voltage	: 220VAC
Frequency	: 50/60Hz
Ampere	: 5.4A
Weight	: 9.8 kg

Packaging Information

Case Qty	: 3pcs/ctn
G.W/N.W	: 29.5Kg/27.5kg
Packaging Size	: 52 cm x 38 cm x 34 cm

- High Performance Motor
- Double Insulation
- 15% higher impact energy for high discharge rates
- Strong impact body

RDH50 DEMOLITION HAMMER



INCLUDE : User Manual, Warranty Card, Handle Grip, 2 Pcs Carbon Brush, Key Chuck, L Key, 1 Pc Pointed Chisel

SPECIFICATION

Input Power	: 1400 W
Impact Rate	: 1,400 bpm
Impact Energy	: 50J
Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 6.3A
Weight	: 19 kg

Packaging Information

Case Qty	: 1 pcs/ctn
G.W/N.W	: 19 Kg/17 kg
Packaging Size	: 71 cm x 17.5 cm x 30 cm

- High Performance Motor
- Double Insulation
- 15% higher impact energy for high discharge rates
- Strong impact body

REW10 ELECTRIC WRENCH 10 MM



INCLUDE : User Manual, Warranty Card, 2 Pcs Carbon Brush

SPECIFICATION

Hex Shank	: 10 mm
No Load Speed	: 0 - 3,600 rpm
Rate Input Power	: 230 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 1.0 A
Weight	: 1.45 kg

Packaging Information

Case Qty	: 10 pcs/ctn
G.W/N.W	: 14.5 Kg/12.5 kg
Packaging Size	: 55 cm x 38.5 cm x 23 cm

- High-Speed Drilling
- Variable Speed Switch
- Externally Accessible Carbon Brush
- Powerful Maximum Torque of 100N.m



RMD23 MAGNETIC DRILL 23 MM



INCLUDE : User Manual, Warranty Card, Handle Grip

SPECIFICATION

Drill Capacity	: 23 mm
No Load Speed	: 300 rpm
Rate Input Power	: 1000 W
Max. Power Magnet	: 12.500 N
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 4.5 A
Weight	: 31 kg

Packaging Information

Case Qty	: 1 pcs/ctn
G.W/N.W	: 29 Kg/25 kg
Packaging Size	: 41 cm x 21 cm x 46 cm

- High magnetic strength
- High Performance Motor
- Double Insulation
- Comfortable Handle

RMD28 MAGNETIC DRILL 28 MM



INCLUDE : User Manual, Warranty Card, Handle Grip

SPECIFICATION

Drill Capacity	: 28 mm
No Load Speed	: 270 rpm
Rate Input Power	: 1100 W
Max. Power Magnet	: 14.000 N
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 5A
Weight	: 32 kg

Packaging Information

Case Qty	: 1 pcs/ctn
G.W/N.W	: 32 Kg/30 kg
Packaging Size	: 40.5 cm x 20 cm x 45 cm

- High magnetic strength
- High Performance Motor
- Double Insulation
- Comfortable Handle

RMD32 MAGNETIC DRILL 32 MM



INCLUDE : User Manual, Warranty Card, Handle Grip

SPECIFICATION

Drill Capacity	: 32 mm
No Load Speed	: 190 rpm
Rate Input Power	: 1200 W
Max. Power Magnet	: 18.000N
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 5.4A
Weight	: 52 kg

Packaging Information

Case Qty	: 1 pcs/ctn
G.W/N.W	: 50 Kg/45 kg
Packaging Size	: 55 cm x 24 cm x 58 cm

- High magnetic strength
- High Performance Motor
- Double Insulation
- Comfortable Handle

RBD13 BENCH DRILL 13 MM



SPECIFICATION

Drill Capacity	: 1.5 - 13 mm
No Load Speed	: 740 - 3140 rpm
Rate Input Power	: 350 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 1.5 A
Size Table	: 160 mm X 160 mm
Height	: 580 mm
Weight	: 14.5 kg

Packaging Information

Case Qty	: 1 pcs/ctn
G.W/N.W	: 21.5 Kg/14.5 kg
Packaging Size	: 46.5 cm x 34 cm x 25.3 cm

- 100% Copper
- 1/2" (13mm) Max. Chuck Capacity
- 210mm Swing
- 5 Spindle Speeds & 45° Table Tilt L&R

INCLUDE : User Manual, Warranty Card, 3 Pcs Handle Grip, L Key, Head Chuck



RBD16 BENCH DRILL 16 MM



SPECIFICATION

Drill Capacity	: 3 - 16 mm
No Load Speed	: 220 - 3320 rpm
Rate Input Power	: 550 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 2.5 A
Size Table	: 290 MM
Height	: 980 mm
Weight	: 40 kg

Packaging Information

Case Qty	: 1 pcs/ctn
G.W/N.W	: 36.5 Kg/33 kg
Packaging Size	: 78 cm x 46 cm x 26.5 cm

- 100% Cooper
- 5/8" (16mm) Max. Chuck Capacity
- 325mm Swing
- 16 Spindle Speeds & 45° Table Tilt L&R

INCLUDE : User Manual, Warranty Card, 3 Pcs Handle Grip, L Key, Head Chuck



RC0180 CUT OFF SAW



INCLUDE : User Manual, Warranty Card, 2 Pcs Carbon Brush, L Key, 2 Pcs Base Plate Disc, Key Lock Nuts.

SPECIFICATION

No Load Speed	: 5,000 rpm
Diameter Wheel	: 180mm (7")
Rate Input Power	: 900 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 4.0 A
Weight	: 6.2 kg

Packaging Information

Case Qty	: 4 pcs/ctn
G.W/N.W	: 25.14 Kg/23.92 kg
Packaging Size	: 51.8 cm x 40.5 cm x 52 cm

- Great Cutting Efficiency
- Steady Structure, Perfect Wheel Cover Design
- Widen and Thicken Base for Better Stability

RC0355-1 CUT OFF SAW



INCLUDE : User Manual, Warranty Card, 2 Pcs Carbon Brush, L Key, Key Lock Nuts.

SPECIFICATION

No Load Speed	: 3,800 rpm
Diameter Wheel	: 355 mm (14")
Rate Input Power	: 2000 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 9.0A
Weight	: 17.5 kg

Packaging Information

Case Qty	: 1 pcs/ctn
G.W/N.W	: 17.5 Kg/16.5 kg
Packaging Size	: 56 cm x 32.5 cm x 40.5 cm

- 100% Copper Wire Motor
- Great Cutting Efficiency
- Trigger Switch with Lock-Off Button
- Steady Structure, Perfect Wheel Cover Design
- Widen and Thicken Base for Better Stability
- Ergonomic Handle

RCS185-1 CIRCULAR SAW



INCLUDE : User Manual, Warranty Card, 2 Pcs Carbon Brush, Guide Bar, Blade 7"

SPECIFICATION

Blade Diameter	: 185 mm
No Load Speed	: 5,000 rpm
Rate Input Power	: 1000 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 4.5 A

Packaging Information

Case Qty	: 4 pcs/ctn
G.W/N.W	: 17 Kg/15 kg
Packaging Size	: 47 cm x 30 cm x 39 cm

- High Performance Motor
- Twice Cutting Processed gear, Lowest Noise
- Chisel Tooth Combination Blade



RCS185-2

CIRCULAR SAW



Power Trigger
Easy for operation



Ergonomic Handle
Angle for ease in pushing
the saw forward



Upper Guard With Hole
For maximum safety even
when discs break and easy
connect to hose vaccum



Rigid Steel Base
Provides smooth cutting because
of toughness, bend resistance,
lightweight and durability



Powerful Motor
High Performance
with 1000 Watt



Bevel Adjustment
Up To 45 Degrees
Allow quick bevel
cuts in difficult
situations



Depth Lock Knob
For quick & easy
tightening



Blade Cover
Automatically protects
the blade after wear
and storage



Tilt cutting 0-45°
High Performance Motor
Chisel tooth combination blade
Twice cutting processed gear, lowest noise

Selling Point Information

- High Performance Motor
- Twice Cutting Processed gear, Lowest Noise
- Chisel Tooth Combination Blade

SAFETY INSTRUCTION



INCLUDE : User Manual, Warranty Card,
2 Pcs Carbon Brush, Guide Bar, Blade 7"

TECHNICAL INFORMATION

The RYU (UN) CIRCULAR SAW RCS185-2 is a high performance, compact and high quality for the highest requirements in cutting jobs, suitable for applications in homes, workshops and garages. equipped with reliable bevel adjustment up to 45° in difficult cutting positions, powerful motor for optimal performance and long service life.

SPECIFICATION

Blade Diameter	: 185 mm
No Load Speed	: 4,500 rpm
Rate Input Power	: 1300 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 5.9 A

Packaging Information

Case Qty	: 4 pcs/ctn
G.W/N.W	: 17 Kg/15 kg
Packaging Size	: 47 cm x 30 cm x 39 cm

RRT12-1 ROUTER



INCLUDE : User Manual, Warranty Card, 2 Pcs Carbon Brush, 2 Pcs Key Pass, Guide Set.

RJS65-1E JIG SAW



INCLUDE : User Manual, Warranty Card, 2 Pcs Carbon Brush, L Key, Guide Set, 1 Pcs Blade

RHD4 HANGING DRILL 4 MM



INCLUDE : User Manual, Warranty Card

SPECIFICATION

No Load Speed	: 23,000 rpm
Size Collet	: 1/2"
Rate Input Power	: 930 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 4.2 A
Weight	: 5 kg

Packaging Information

Case Qty	: 3 pcs/ctn
G.W/N.W	: 15 Kg/14 kg
Packaging Size	: 62 cm x 35 cm x 23 cm

- Double Insulation
- High performance Motor
- Adjustable Depth Button
- Double Transparent Protection Mantles
- Table Tilt L&R

SPECIFICATION

No Load Speed	: 500 - 3,100 rpm
Rate Input Power	: 450 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 2A
Depth of cut wood	: 65 mm
Depth of cut iron	: 3.0 mm
Depth of cut aluminum	: 1.6 mm
Weight	: 2.4 kg

Packaging Information

Case Qty	: 6 pcs/ctn
G.W/N.W	: 14.5 Kg/12.5 kg
Packaging Size	: 53.5 cm x 28 cm x 25 cm

- Double Insulation
- High performance Motor
- With Laser
- Variable Speed
- Change level for 3 orbital setting and straight cutting

SPECIFICATION

Voltage	: 220 V
Power	: 150 W
No load speed	: 0-20000 rpm
Collet diameter	: 1-4 mm
Frequency	: 50-60 Hz
Max. Diameter	: 4 MM
Weight	: 2 kg

Packaging Information

Case Qty	: 10 pcs/ctn
G.W/N.W	: 28.6 Kg/28.6 kg
Packaging Size	: 54 cm x 47 cm x 54 cm

- Double Insulation
- Foot Switch for easy to use
- Powerful, Compact, and lightweight
- High Performance Motor

RTS8 TABLE SAW 8"



INCLUDE : User Manual, Warranty Card, Guide Bar, Push Stick, Blade 8", Key Set.

RTS10 TABLE SAW 10"



INCLUDE : User Manual, Warranty Card, Guide Bar, Push Stick, Blade 8", Key Set

RBS8 BAND SAW 8"



INCLUDE : User Manual, Warranty Card, Guide Bar, Push Stick, Blade.

SPECIFICATION

No Load Speed	: 2,960 rpm
Rate Input Power	: 600 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 2.7A
Size Table	: 500 mm X 335 mm
Size Saw Blade	: 16 X 2.4 mm
Depth Cutting	: 45 mm (90°) – 27 mm (45°)
Weight	: 10.8 kg

Packaging Information

Case Qty	: 1 pcs/ctn
G.W/N.W	: 12 Kg/11 kg
Packaging Size	: 52.3 cm x 35 cm x 26 cm

- Built-in dust extraction
- Adjustable Rip fence for direct and miter cuts
- Single Phase Induction Motor with Protection

SPECIFICATION

No Load Speed	: 2,960 rpm
Rate Input Power	: 2000 W
Rate Voltage	: 220 VAC
Frequency	: 50/60Hz
Ampere	: 9A
Power Laser	: 1 mW
Size Table	: 630 mm X 445 mm
Size Saw Blade	: 2.8 mm
Blade Teeth	: 24/28
Depth Cutting	: 73 mm (90°) – 63 mm (45°)
Weight	: 23.5 kg

Packaging Information

Case Qty	: 1 pcs/ctn
G.W/N.W	: 24 Kg/23 kg
Packaging Size	: 66.7 cm x 53 cm x 34 cm

- Strong and stable steel machine cabinet
- Quick lock device and fine adjustable handle
- Quick designed ripping fence with magnifying glass

SPECIFICATION

Blade Speed	: 900 rpm
Rate Input Power	: 350 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 1.5A
Size Table	: 300 mm X 300 mm
Size Blade	: 1430 X 10 X 6T
Max. Cutting Thickness	: 85 mm
Weight	: 17.5 kg

Packaging Information

Case Qty	: 1 pcs/ctn
G.W/N.W	: 17.5 Kg/15.6 kg
Packaging Size	: 75 cm x 39.5 cm x 28.5 cm

- Low vibration Induction Motor
- Tilting table up to 45°
- Easy Adjust Pully Alignment
- Supplied with a high quality blade
- More Precise with aluminum rip fence

RTR6-1 WOOD TRIMMER



INCLUDE : User Manual, Warranty Card, 2 Pcs Carbon Brush, 2 Pcs Key Pass, Guide Set

RSS125 SCROLL SAW 125 MM



INCLUDE : User Manual, Warranty Card

RMS180 MITER SAW 7"



INCLUDE : User Manual, Warranty Card, Clam Set, 1 Pcs Blade

SPECIFICATION

No Load Speed	: 30,000 rpm
Size Collet	: 1/4"
Rate Input Power	: 440 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 2A
Max. Depth	: 30 mm
Weight	: 5 kg

Packaging Information

Case Qty	: 3 pcs/ctn
G.W/N.W	: 15 Kg/14 kg
Packaging Size	: 62 cm x 35 cm x 23 cm

- Transparent Bottom
- High performance Motor
- Small Convenient Operation

SPECIFICATION

Vacuum Speed	: 1400/min
Rate Input Power	: 120 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 0.5A
Base/Surface	: 405 mm
Cutting Capacity	: 50 mm
Disk	: 125 mm 15/18TPI
Inclination	: 0 - 45°
Type of insulation	: Class 1
Weight	: 12 kg

Packaging Information

Case Qty	: 1 pcs/ctn
G.W/N.W	: 12,7 Kg/12kg
Packaging Size	: 65 cm x 33 cm x 35.4 cm

- Magnetic motor with LED work Light
- Portable handle design
- Cast iron base
- Variable speed design

SPECIFICATION

No Load Speed	: 5,500 rpm
Diameter Saw Blade	: 185 mm/7"
Rate Input Power	: 900 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 4 A
Max. Cutting Capacity	: 210 x 60 mm
Blade size	: 185 x 25.4 x 24T
Weight	: 6.4 kg

Packaging Information

Case Qty	: 1 pcs/ctn
G.W/N.W	: 6.4 Kg/5.4 kg
Packaging Size	: 49 cm x 31cm x 28.5 cm

- Strong and stable steel machine cabinet
- Quick lock device and fine adjustable handle
- Quick designed ripping fence with magnifying glass



RMS180-1 MITER SAW 7" (SLIDING)



INCLUDE : User Manual, Warranty Card, Clam Set, 1 Pcs Blade

SPECIFICATION

No Load Speed	: 4,500 rpm
Diameter Saw Blade	: 185 mm/7"
Rate Input Power	: 1650 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 7.5 A
Max. Cutting Capacity	: 210 x 60 mm
Blade size	: 185 x 25.4 x 24T
Weight	: 10 kg

Packaging Information

Case Qty	: 1 pcs/ctn
G.W/N.W	: 12,6 Kg/10 kg
Packaging Size	: 65,6 cm x 45,2 cm x 38,9 cm

- Aluminum work-table, made at aluminum alloy designed for secure grip
- Ergonomic Designed D-Handles with Soft Grip for Improved comfort
- Transparent lower guard for additional safety

SPECIFICATION

No Load Speed	: 4,800 rpm
Diameter Saw Blade	: 255 mm/10"
Rate Input Power	: 1650 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 7.5 A
Max. Depth	: 30 mm
Weight	: 12.5 kg

Packaging Information

Case Qty	: 1 pcs/ctn
G.W/N.W	: 12.5 Kg/11.5 kg
Packaging Size	: 44 cm x 57 cm x 44 cm

- 100% Copper wire motor for powerful performance
- D-handle design for easy and comfortable design
- Heavy Duty Aluminum Base ensures accurate cuts
- Shaft lock for easy blade changes

SPECIFICATION

No Load Speed	: 0 - 13,000 rpm
Saw Blade	: 110 mm
Cutting Depth (90°)	: 34 mm
Cutting Depth (45°)	: 22 mm
Rate Input Power	: 1200 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 5.4A
Weight	: 3.5 kg

Packaging Information

Case Qty	: 4 pcs/ctn
G.W/N.W	: 14 Kg/12 kg
Packaging Size	: 48 cm x 30.5 cm x 40 cm

- Double Insulation
- High Performance Motor
- Dry wet amphibious cutting
- Cut stone, ceramic tile, Marble, Concrete

RMC110-2 MARBLE CUTTER 110 MM



INCLUDE : User Manual, Warranty Card, 2 Carbon Brush, 1 Pc Key Pass, 1 Pc L Key, Guide Set.




SPECIFICATION

No Load Speed	: 4,500 rpm
Diameter Saw Blade	: 185 mm/7"
Rate Input Power	: 1650 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 7.5 A
Max. Cutting Capacity	: 210 x 60 mm
Blade size	: 185 x 25.4 x 24T
Weight	: 10 kg

Packaging Information

Case Qty	: 1 pcs/ctn
G.W/N.W	: 12,6 Kg/10 kg
Packaging Size	: 65,6 cm x 45,2 cm x 38,9 cm

- Double Insulation
- High Performance Motor
- Dry wet amphibious cutting
- Cut stone, ceramic tile, Marble, Concrete

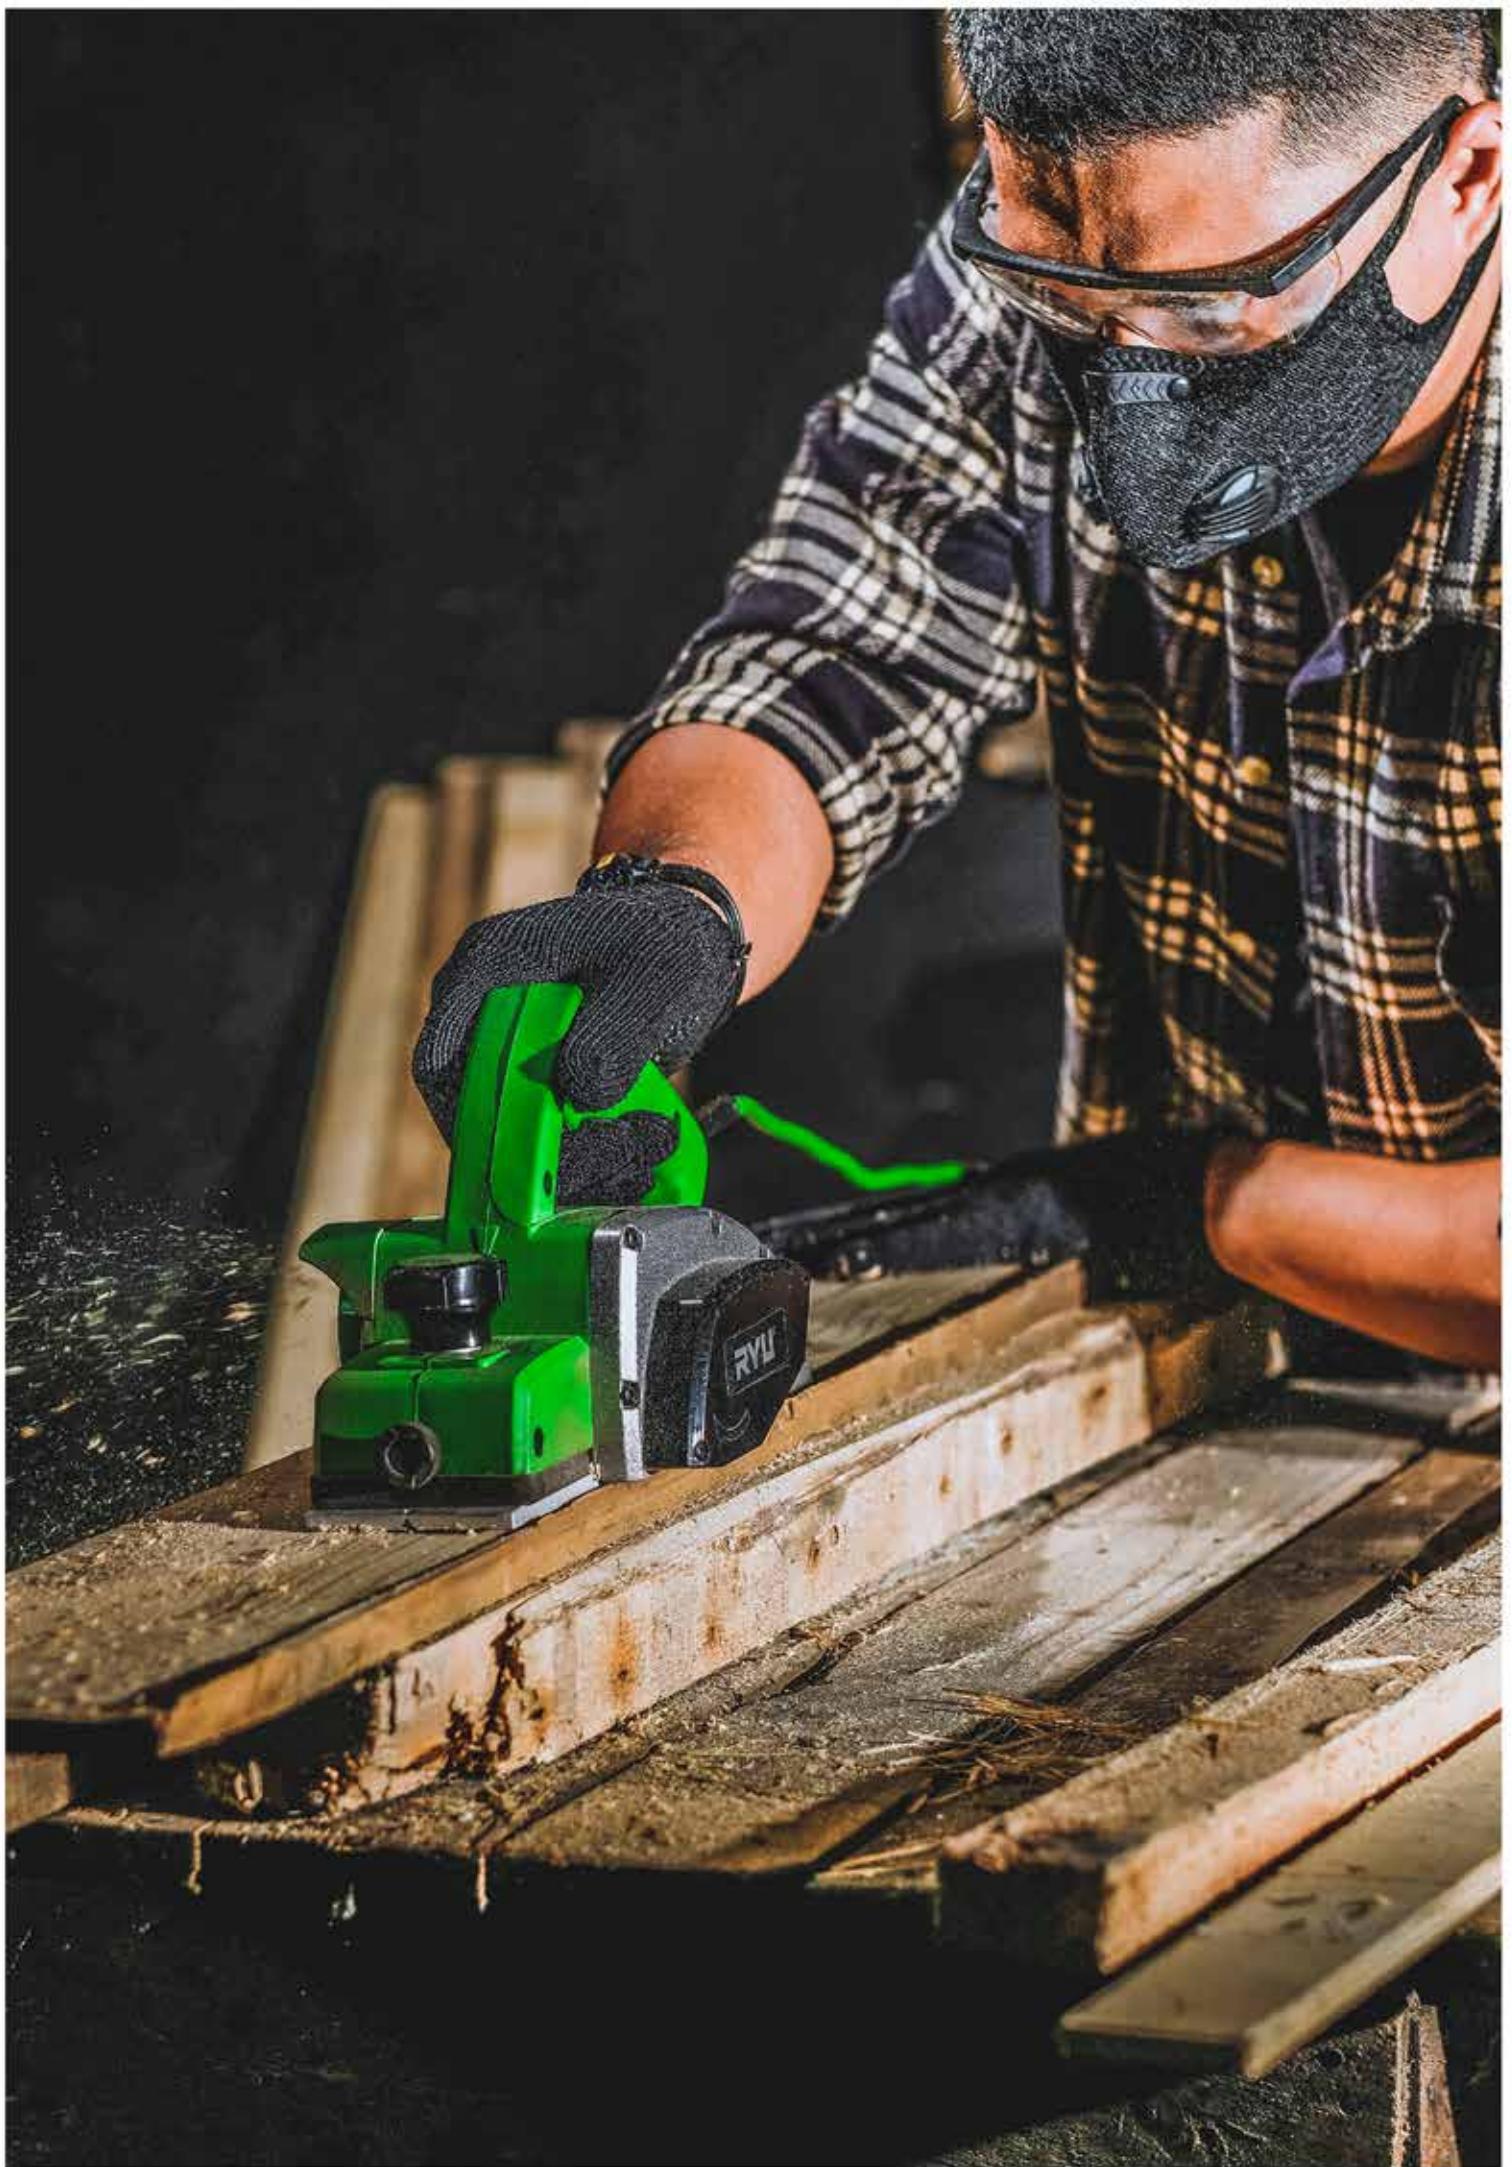

RPL82-3A PLANNER



Selling Point Information

- Double Insulation
- Strong and lightweight
- Precision work efficiency
- Switch Lock
- Ergonomic Handle

SAFETY INSTRUCTION



INCLUDE : User Manual, Warranty Card, 2 Pcs Carbon Brush

TECHNICAL INFORMATION

The RYU (UN) PLANNER RPL82-3A is a planer or planer machine that functions to flatten or shrink the surface of the wood to become smooth. PLANNER RPL82-3A engine produced by the RYU factory, this machine has an electric power of 570 Watts and a no-load speed of 15000 rpm. 82mm flatten surface width to 1mm depth. A compact and powerful machine suitable for all heavy work, be it construction, making doors and furniture, hobbies, and others.

SPECIFICATION

Rate Input Power	: 570 W
Rate Voltage	: 220 V±15%V
Frequency	: 50/60 Hz
No Load Speed	: 0 - 15000 rpm
Planing width	: 82 mm
Planing depth	: Max. 2.5 mm
Weight	: 3.3 kg
Packaging Information	
Case Qty	: 6 pcs/ctn
G.W/N.W	: 20.0Kg/19.0 kg
Packaging Size	: 53.0 cm x 33.0 cm x 36.5 cm

RPS110 PALM SANDER 110 X 100 MM



INCLUDE : User Manual, Warranty Card, 2 Pcs Carbon Brush.

SPECIFICATION

No Load Speed	: 12,000 rpm
Rate Input Power	: 170 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 0.7A
Cashion Size	: 110 x100 mm
Weight	: 1.5 kg

Packaging Information

Case Qty	: 10 pcs/ctn
G.W/N.W	: 15 Kg/13 kg
Packaging Size	: 62 cm x 20.5 cm x 31cm

- Double Insulation
- One-handed Operation
- High Performance Motor
- External carbon brushes

ROS13-1A ORBITAL SANDER



INCLUDE : User Manual, Warranty Card, 2 Pcs Carbon Brush

SPECIFICATION

No Load Speed	: 10,000 rpm
Rate Input Power	: 180 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 0.8A
Sandpaper Size	: 180 x 90 mm
Weight	: 1.9 kg

Packaging Information

Case Qty	: 10 pcs/ctn
G.W/N.W	: 19 Kg/18 kg
Packaging Size	: 52 cm x 32 cm x 34 cm

- Double Insulation
- Simple Sandpaper Clip
- High Performance Motor
- External carbon brushes

RBS4 BELT SANDER ELECTRIC 4" MM



INCLUDE : User Manual, Warranty Card

SPECIFICATION

Voltage	: 220 V
Input Power	: 1.200 W
Belt Speed	: 500m / Min
Frequency	: 50-60 Hz
Abrasice Belt Size	: 100 x 610 MM

Packaging Information

Case Qty	: 4 pcs/ctn
G.W/N.W	: - Kg / - kg
Packaging Size	: - cm x - cm x - cm

- Powerful Motor 1.200 W
- Low Noise For Operator Comfort
- Long Cable For Easier Manueverability
- 4" Wide Belt With a Speed Of 500m/min For Fast Material Removal

RGT350-1 GRASS TRIMMER



SPECIFICATION

No Load Speed	: 10000 rpm
Rate Input Power	: 300 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 1.5A
Working Width	: 250 mm
Height Setting	: 0 – 120 mm
Round Cut	: 180°
Weight	: 2.5kg

Packaging Information

Case Qty	: 4 pcs/ctn
G.W/N.W	: 10 Kg/8 kg
Packaging Size	: 94 cm x 44 cm x 24,5 cm

- Double Insulation
- Work Fast with Light on the Front
- High Performance motor
- The most Suitable Tools grinding Work

RVC15 VACUUM CLEANER



SPECIFICATION

No Load Speed	: 10,000 rpm
Rate Input Power	: 650 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 2.9A
Suction Power	: 18 KPA
Weight	: 4.8 kg

Packaging Information

Case Qty	: 1 pcs/ctn
G.W/N.W	: 4.80 Kg/4.50 kg
Packaging Size	: 52 cm x 35.2 cm x 34 cm

- Powerful Suction
- Blow Function
- Powerful Motor
- Strong Plastic Tank
- 15 L Tank Capacity

RED16RE ELECTRIC DRILL MIXER 16 MM



SPECIFICATION

No Load Speed	: 1,200 rpm
Chuck Capacity	: 16 mm
Rate Input Power	: 950 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 4.3 A
Weight	: 4.9 kg

Packaging Information

Case Qty	: 5 pcs/ctn
G.W/N.W	: 27.7 Kg/27.3 kg
Packaging Size	: 47 cm x 21 cm x 29 cm

- Full 360° Rotatable D-handle with 24-Positive Stop for
- Multi-position Operation
- High Continuous rating Input
- Aluminum Housing is More Durable
- Lock-on Switch for More Safety and easier

INCLUDE : User Manual, Warranty Card, 2 Carbon Brush, 1 Pc Key Chuck, 1 Pc Head Chuck 16 mm, 2 Model Handle





RSE800 SPRAY GUN ELECTRIC 800 ML



INCLUDE : User Manual, Warranty Card, 1 Pc Sprayer, 2 Pcs Seal Tank

SPECIFICATION

No Load Speed	: 3,000 rpm
Rate Input Power	: 450 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 2 A
Size Nozzle	: 2.6 mm
Flow Rate	: 740 ml/min
Air Pressure	: 13 kpa
Container Capacity	: 800 ml
Weight	: 1.5 kg

Packaging Information

Case Qty	: 4 pcs/ctn
G.W/N.W	: 6,6 Kg/6 kg
Packaging Size	: 54 cm x 28.5 cm x 29 cm

- High Volume low pressure
- Waterproof "ON/OFF" switch
- Vertical fan, horizontal fan and around
- Accessories : viscosity cup

SPECIFICATION

No Load Speed	: 3,000 rpm
Rate Input Power	: 650 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 2.9A
Size Nozzle	: 2.4 mm
Flow Rate	: 740 ml/min
Air Pressure	: 13 kpa
Container Capacity	: 800 ml
Extension Length	: 160 cm
Weight	: 1.6 kg

Packaging Information

Case Qty	: 4 pcs/ctn
G.W/N.W	: 10 Kg/9,3 kg
Packaging Size	: 47.5 cm x 36.5 cm x 42 cm

- High Performance Motor
- Flexible Electric Spray Gun
- With Double Nozzle

SPECIFICATION

Voltage	: 20 V
Power Rate	: 450 W
Diameter	: 2.0 mm
Fluid Rate	: 900 ML / Min
Paint Container Capacity	: 1200 ML
Max. Paint Viscosity	: 100 din/s
Frequency	: 50 Hz
Air Pressure	: ≥14Kpa

Packaging Information

Case Qty	: 6 pcs/ctn
G.W/N.W	: 11 Kg/11 Kg
Packaging Size	: 56 cm x 30 cm x 40.5 cm

- High Efficient Motor & High Pressure, More Better Paint Atomization
- Prompt Disassembly and Installation
- Reduce noise & dust-proof

RSE800-2 SPRAY GUN ELECTRIC 1200 ML



INCLUDE : User Manual, Warranty Card

RMT6 MULTI TOOL SET 6 PCS



INCLUDE : User Manual, Warranty Card, 1 Pc L Key, 1 Pc Triangular EVA Sending Pad, 1 Pc Segment HSS Saw, 1 Pcs Curved Scroper Blade, 1 Pc Scroper, 6 Pcs Triangle Sand Paper.

SPECIFICATION

No Load Speed	: 6,000 – 20,000 rpm
Rate Input Power	: 320 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 1.4 A
Angle Left/Right	: 1.6° – 3.2°
Safety Class	: II
Weight	: 2.3 kg

Packaging Information

Case Qty	: 4 pcs/ctn
G.W/N.W	: 10,8 Kg/8,8 kg
Packaging Size	: 52 cm x 37 cm x 23 cm

- Oscillation Up to 20.000rpm
- More Stable with Oscillating Angle 3.2°
- Various Accessories Available

RDG3.2 MINI DIE GRINDER 3.2 MM



INCLUDE : User Manual, Warranty Card, Flexible Extension, Key Chuck, L Key

SPECIFICATION

No Load Speed	: 8,000 – 32,000 rpm
Rate Input Power	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 0.6A
Max. Drilling Diameter	: 3.2"
Safety Class	: II
Weight	: 1.4 kg

Packaging Information

Case Qty	: 5 pcs/ctn
G.W/N.W	: 8 Kg/7 kg
Packaging Size	: 45 cm x 32 cm x 20 cm

- Mini Drill Type
- Drilling Diameter 3.2 (Max)
- No Load Speed 8000-32000rpm

RDG6-1 DIE GRINDER 6 MM



INCLUDE : User Manual, Warranty Card, 2 Pcs Carbon Brush, 2 Pcs Key Pas, 3 Pcs Mounted Stone

SPECIFICATION

No Load Speed	: 28,000 rpm
Rate Input Power	: 750 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 3.4 A
Tube Diameter	: 6 mm
Safety Class	: II
Weight	: 2.3 kg

Packaging Information

Case Qty	: 10 pcs/ctn
G.W/N.W	: 23 Kg/21,8 kg
Packaging Size	: 43 cm x 44 cm x 26 cm

- Double Insulation
- Work Fast with Light on the Front
- High Performance motor
- The most Suitable Tools grinding Work

RWP25DC WATER PUMP 25 DC



SPECIFICATION

No Load Speed	: 5,800 rpm
Power Motor	: 50 W
Voltage	: 12 VDC
Volume Output	: 63 L/min
Diameter Outlet	: 25 mm/1"
Delivery Head	: 4 m
Frequency	: 50/60 Hz
Ampere	: 4.1A
Water Temperature	: 0 – 60°C
Weight	: 1.1 kg

Packaging Information

Case Qty	: 20 pcs/ctn
G.W/N.W	: 23,5 Kg/22,5 kg
Packaging Size	: 52 cm x 27,5 cm x 40 cm

- Large Delivery Volume and Pressure
- Small Size light compact and easy to handle
- Easy to cleaner

RWP100AC WATER PUMP 100 AC



SPECIFICATION

Power	: 100 W
Voltage	: 12 V
Frequency	: 50 Hz
Max. Head	: 3.5 m
Delivery Volume	: 4500 Liter / Hours
IPX8	: 4.1A
Outlet Connection	: (5/8", 3/4", 1")
Weight	: 2 kg

Packaging Information

Case Qty	: 12 pcs/ctn
G.W/N.W	: - Kg/- kg
Packaging Size	: 38 cm x 31 cm x 33 cm

- Efficient Utility Pump With High Performance Motor
- Quiet Safe And Reliable Design
- IPX8
- Compact Design And Easy To Handle
- Easy To Instal And Maintain



INCLUDE : User Manual, Warranty Card,

RPW100 PRESSURE WASHER 100 BAR



SPECIFICATION

Motor	: Induction Motor
Max. Pressure	: 100 Bar
Max. Flow	: 4.5 L / Min
Power	: 400 W
Voltage	: 220 V / 50 Hz

Packaging Information

Case Qty	: 1 pcs/ctn
G.W/N.W	: - Kg/- kg
Packaging Size	: - cm x - cm x - cm

- High Performance Motor 400 W
- Equipped With A Water Pressure Gauge
- Powerfull Pump Head Max. Pressure 100 Bar
- Automatic Start Stop System
- Variable Nozzle Gun, Lance And Bottle Foam



INCLUDE : User Manual, Warranty Card,



RPW70-1

PRESSURE WASHER

70 BAR



Selling Point Information

- With 700 W Power
- 70-Bar Max Pressure
- 330L Rate Flow/Hour
- Variable Nozzle Gun and Lance
- Automatic Total Stop System

INCLUDE : User Manual, Warranty Card, Gun And Nozzle Set, Pressure Hose

TECHNICAL INFORMATION

The RYU (UN) PRESSURE WASHER 70 BAR is a cleaning equipment that uses high pressure water to clean a wide surface. Very effectively used to clean dirt deposits, stubborn dirt, and moss and mold that sticks. Portable shape design and included handle for easy movement. Equipped with a total stop system when not in use. the engine automatically shuts down and thermal protection to prevent overheating and increase engine life. Ideal for cleaning the surfaces of parks, garages, walls, cars and other outdoor equipment where dirt is very difficult to clean.

SPECIFICATION

Rate Input Power	: 700 W
Rate Voltage	: 220-240 VAC
Frequency	: 50/60 Hz
Motor type	: Carbon Brush
Max. delivery rate	: 330 (l/h)
Max. pressure	: 70 bar
Weight	: 5.6 kg

Packaging Information

Case Qty	: 1pc/ctn
G.W/N.W	: 6.0Kg/4.6 kg
Packaging Size	: 28.5cm x 23 cm x 37.3 cm

RGP125E GUN POLISHER



INCLUDE : User Manual, Warranty Card, 2 Carbon Brush, 1 Pc Key Pass, 1Pc 5" Pad Polisher Set, Handle Grip

RGP180E GUN POLISHER



INCLUDE : User Manual, Warranty Card, 2 Carbon Brush, 1 Pc Key Pass, 1 Pcs 7" Pad Polisher Set, Handle Grip

RP0180-1E ANGLE POLISHER 7"



INCLUDE : User Manual, Warranty Card, 2 Carbon Brush, 1 Pc Key Pass, 1 Pcs 7" Pad Polisher Set, 2 Model Handle

SPECIFICATION

No Load Speed	: 1,600 – 4,000 rpm
Rate Input Power	: 440 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 2A
Disc Diameter	: 125mm (5")
Weight	: 2 kg

Packaging Information

Case Qty	: 10 pcs/ctn
G.W/N.W	: 20 Kg/18 kg
Packaging Size	: 55 cm x 43 cm x 29 cm

- High Performance Motor
- Double Insulation
- Adjust the Speed at Preset

SPECIFICATION

No Load Speed	: 600 – 2,000 rpm
Rate Input Power	: 900 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 4 A
Disc Diameter	: 180 mm
Weight	: 3 kg

Packaging Information

Case Qty	: 3 pcs/ctn
G.W/N.W	: 9 Kg/8 kg
Packaging Size	: 40 cm x 33 cm x 26 cm

- High Performance Motor
- Double Insulation
- Adjust the Speed at Preset

SPECIFICATION

No Load Speed	: 660 – 3,000 rpm
Rate Input Power	: 1200 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 5.4A
Disc Diameter	: 180 mm
Weight	: 4.3 kg

Packaging Information

Case Qty	: 2 pcs/ctn
G.W/N.W	: 8.6 Kg/7.6 kg
Packaging Size	: 47 cm x 21 cm x 29 cm

- High Performance Motor
- Double Insulation
- Adjust the Speed at Preset

RWG700 PLASTIC WELDING



INCLUDE : User Manual, Warranty Card, Nozzle

RHG600-4 HEAT GUN



INCLUDE : User Manual, Warranty Card, 2 Pcs Flow Holder

RBL25-1 BLOWER



INCLUDE : User Manual, Warranty Card

SPECIFICATION

Rate Input Power	: 700 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 3.1A
Gas Flow	: 50 - 300
Temperature	: 50 - 400°C

Packaging Information

Case Qty	: 20 pcs/ctn
G.W/N.W	: 14 Kg/12 kg
Packaging Size	: 51 cm x 35 cm x 40 cm

- Universal fit for repairs plastic components
- Incredibly adhesive
- Compact design, easy to use and carry

SPECIFICATION

No Load Speed	: 210-250 / 340-380L/m
Rate Input Power	: 1800 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 8.1A
Temperature Control	: 2 Position
Temperature Selection	: 50-350°/50-600°
Weight	: 0.85 kg

Packaging Information

Case Qty	: 10 pcs/ctn
G.W/N.W	: 10.5 Kg/7.5 kg
Packaging Size	: 45 cm x 29 cm x 51 cm

- More Durable & Powerful
- Hanging Hook for Easy Storage
- Over-Heat Protection

SPECIFICATION

No Load Speed	: 16,000 rpm
Rate Input Power	: 600 W
Rate Voltage	: 220 VAC
Frequency	: 50/60 Hz
Ampere	: 2.7A
Volume Air Flow	: 0 – 2.8m ³ /min
Blade size	: 185 x 25.4 x 24T
Weight	: 2.3 kg

Packaging Information

Case Qty	: 6 pcs/ctn
G.W/N.W	: 14 Kg/12 kg
Packaging Size	: 62 cm x 28 cm x 42 cm

- Double Insulation
- Speed Control switch
- Light & Easy to carry
- High Performance Motor
- Sucking & Blowing Function

RCD5 CORING DRILL MACHINE 130 MM



INCLUDE : User Manual, Warranty Card

RMM13 MORTISER MACHINE 13 MM



INCLUDE : User Manual, Warranty Card

RPP12 PORTABLE PLANNER 304 MM (12")



INCLUDE : User Manual, Warranty Card

SPECIFICATION

Max. Diameter Drilling	: 130 MM (5")
Power	: 1980 W
Voltage	: 220 V
No.Load Speed	: 1200 RPM
Frequency	: 50-60Hz
Tube Diameter	: 6 mm
Motor Type	: Copper Wire
Weight	: 13 kg

Packaging Information

Case Qty	: 1 pcs/ctn
G.W/N.W	: 13 Kg/13 kg
Packaging Size	: 74 cm x 27 cm x 21 cm

- Double Insulation
- Work Fast with Light on the Front
- High Performance motor
- The most Suitable Tools grinding Work

SPECIFICATION

Motor Power	: 750 W
Spindle Speed	: 2840 r / mint
Voltage	: 220 V
Max. Mortising Depth	: 70 mm
Chisel Capacity	: 3/8 inch
Table Size	: 220 x 160 mm
Weight	: 48 kg

Packaging Information

Case Qty	: 1 pcs/ctn
G.W/N.W	: 50 Kg/48 Kg
Packaging Size	: 50 cm x 47.5 cm x 31 cm

- Solid Cast Iron Construction
- Precision Machined Casting
- Fully Adjustable Guide

SPECIFICATION

Cutting Width	: 304mm (12")
Power	: 1.650 W
Voltage	: 220 VAC
Frequency	: 50/60 Hz
No.Load Speed	: 8.500 rpm
Feed Rate/Min	: 8.5m (28ft)
Motor Type	: Copper Wire


Packaging Information

Case Qty	: 1 pcs/ctn
G.W/N.W	: 33.9 Kg/33.9 Kg
Packaging Size	: 34.2 cm x 52 cm x 42.5 cm

- Suitable for wood working
- 100% Copper Motor
- HSS Material provide long cutting life



CORDLESS

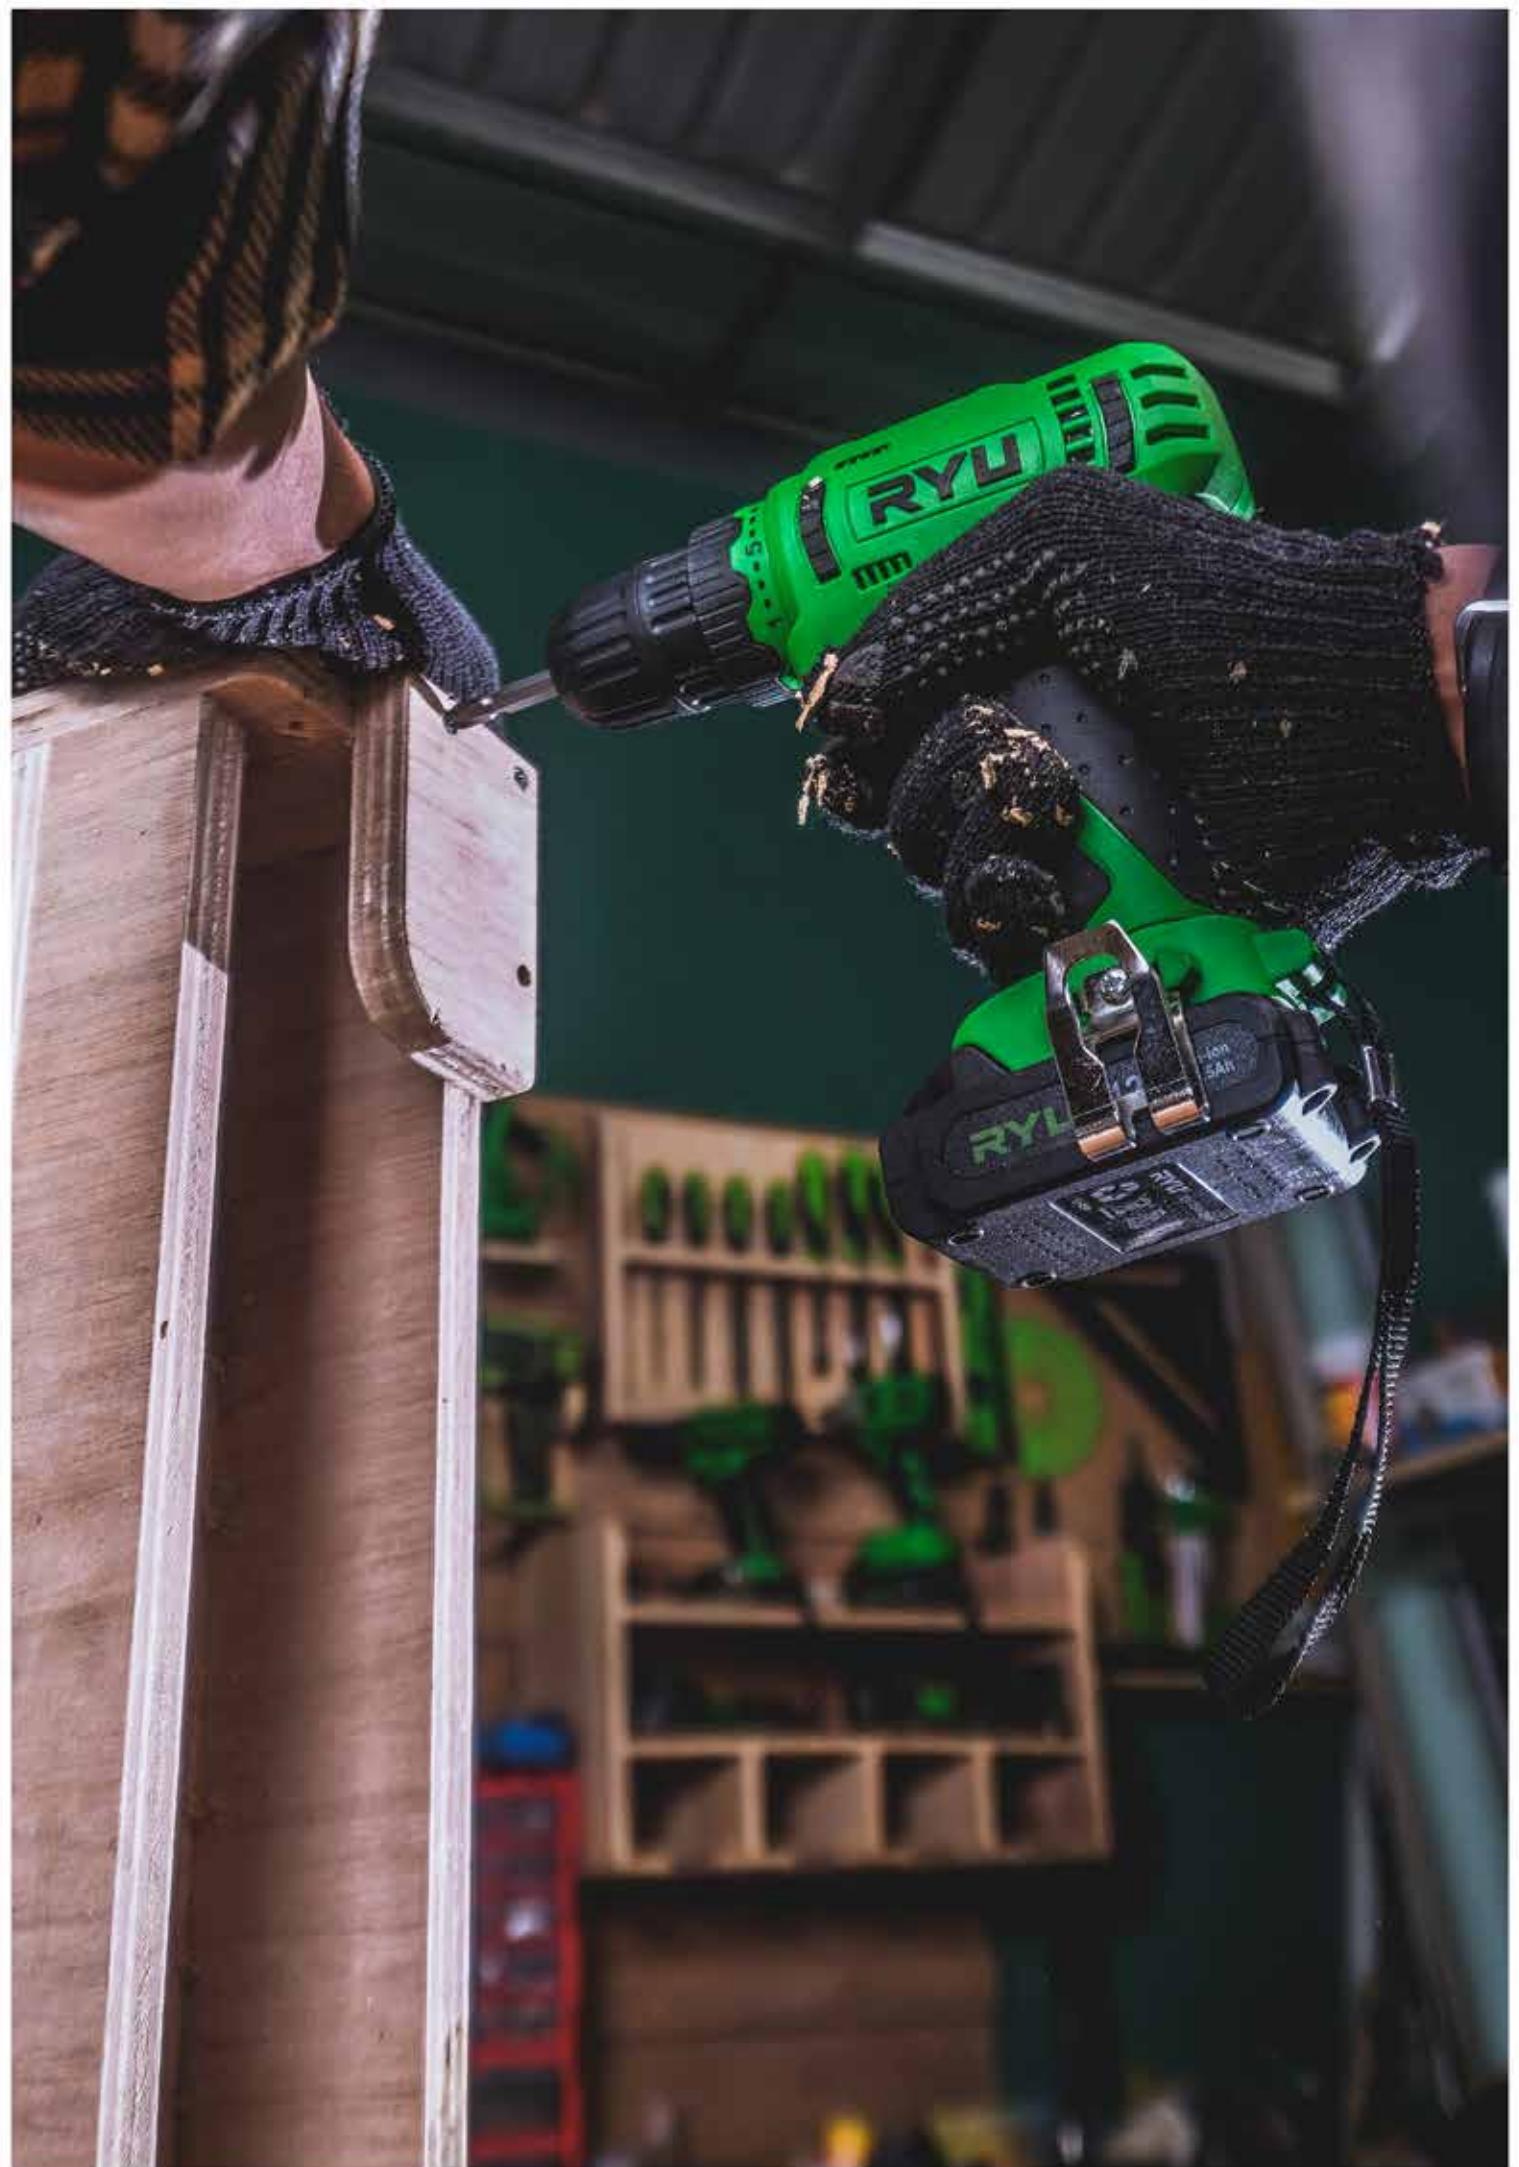

RCD12V CORDLESS 12V



Selling Point Information

- Built-in LED light for work in dark areas.
- 1 Hour quick battery charger.
- Two speed powder metallurgy gearbox.
- Lithium-ion provides longer run time.
- Quick charger chuck

SAFETY INSTRUCTION



INCLUDE : User Manual, Warranty Card, Charger, 2 Pcs Battery

TECHNICAL INFORMATION

The RCD12V cordless drill/screwdriver is a high quality, high performance and compact tool for the highest demands on drilling and screwdriving jobs everywhere in the home, workshop and garage. The lithium ion battery has a battery management system for optimum control and long battery life. Good power transmission is assured by the high power and high torque motor and a robust two-speed metal gearing with reversing facility.

SPECIFICATION

Charging time	: 1 h
Number of gear	: 2
Idle speed (gear 1)	: 0-350 rpm
Idle speed (gear 2)	: 0-1300 rpm
Max torque hard	: 24 N.m
Number of torque steps	: 18 settings
Drill chuck	: 10 mm / 3/8"
Nett weight	: 1.05 kg
Gross weight	: 2.4 kg

RCD4.8V USB CORDLESS 4.8V WITH USB CHARGER



INCLUDE : User Manual, Warranty Card, Charger Cable

RCD4.8V-1 USB CORDLESS 4.8V-1



INCLUDE : User Manual, Warranty Card, Charger

RCD12V-1 CORDLESS DRILL 12V-1



INCLUDE : User Manual, Warnty Card, Charger, Screwdriver Bit

SPECIFICATION

Voltage	: 4.8 V 1.3 Ah Liion
Charging time	: 2 h
Idle speed (gear 1)	: 0-200 rpm
Max torque hard	: 5 N.m
Number of torque steps	: 10 +1 settings
Drill chuck Iron Capacity	: 6 mm
Drill chuck Wood Capacity	: 6 mm
Weight	: 1.3 kg

Packaging Information

Case Qty	: 5 pcs/ctn
G.W/N.W	: 6.5 Kg/6 kg
Packaging Size	: 46.5 cm x 23 cm x 19 cm

- 60° Swivelling Handle
- USB Charger + LED Torch
- 10 + 1 Torque Setting
- Ergonomic Handle

SPECIFICATION

Voltage	: 4.8 V 1.3 Ah Li-ion
Charging time	: 3 h
Idle speed (gear 1)	: 0-200 rpm
Max torque hard	: 3 N.m
Number of torque steps	: 10 +1 settings
Drill chuck Iron Capacity	: 6 mm
Drill chuck Wood Capacity	: 6 mm
Weight	: 0.8 kg

Packaging Information

Case Qty	: 10 pcs/ctn
G.W/N.W	: 8.5 Kg/8kg
Packaging Size	: 47 cm x 33 cm x 23.5 cm

- Charging Time : 3 Hours
- Soft Grip for Comfort
- 24 Pcs Bits
- Ergonomic Handle

SPECIFICATION

Voltage	: 12 V 1.5 Ah Li-ion
Charging time	: 1 h
Number of gear	: 2
Idle speed (gear 1)	: 0-350 rpm
Idle speed (gear 2)	: 0-1,300 rpm
Drill chuck Iron Capacity	: 10 mm
Drill chuck Wood Capacity	: 10 mm
Number of torque steps	: 18 settings
Drill chuck	: 10 mm 3/8"
Net weight	: 0.92 kg

Packaging Information

Case Qty	: 10 pcs/ctn
G.W/N.W	: 12.8 Kg/10.8 kg
Packaging Size	: 42 cm x 37 cm x 23.5 cm

- More easier with Switch Lock
- Comfortable Rubberized Grip
- Powerful, Comfort and Light Weight
- Variable Speed Switches

RCI20V CORDLESS IMPACT DRILL 20V



INCLUDE : User Manual, Warranty Card, Charger, Screwdriver Bit Set, Drill Bit Wood 4,5,6 mm, Masonry 4,5,6 mm, Shock 5-13 mm, Flexibel Stick.

RCG7 CORDLESS GLUE GUN 7 MM



INCLUDE : User Manual, Warranty Card, 2 Pcs Glue Stick, Charger, Charger Cable.

RCC12 MINI AIR COMPRESSOR 12V



INCLUDE : User Manual, Warranty Card, Lightning Cable

SPECIFICATION

Voltage	: 20 V 1.5 Ah Li-ion
Charging time	: 1 h
Impact rate	: 0- 3.000/ipm
Drill chuck Iron Capacity	: 10 mm
Drill chuck Wood Capacity	: 10 mm
Max Torque	: 32 Nm
Number of torque steps	: 18 settings
Drill chuck	: 10 mm 3/8"
Net weight	: 3.14 kg

Packaging Information

Case Qty	: 5 pcs/ctn
G.W/N.W	: 17.2 Kg/15.2 kg
Packaging Size	: 57 cm x 35.5 cm x 30 cm

- Built-in LED Light for Work in Dark Areas
- Comfortable Rubberized Grip
- 1Hour Quick Time battery Charger
- Variable Speed Switches

SPECIFICATION

Input Power	: 12 W
Voltage	: 3.7 V
Flow of Glue	: 8-10 M/G
Preheat Time	: 15 sec
Battery Capacity	: 1500 mAh
Size Stick	: 7 mm
Weight	: 0.5 kg

Packaging Information

Case Qty	: 20 pcs/ctn
G.W/N.W	: 10.8 Kg/9.4kg
Packaging Size	: 57 cm x 22.5 cm x 34 cm

- Quick Dry
- Easy Charging
- Quick Start 15 Sec
- Constant Electronic

SPECIFICATION

Voltage	: 12 V
Working Pressure	: 8.3 Bar
Max. Pressure	: 120 psi
Air Flow Rate	: 40 L/Min
Length Cable	: 3.5 m
Weight	: 0.9 kg

Packaging Information

Case Qty	: 6 pcs/ctn
G.W/N.W	: 6,8 Kg/6,2 kg
Packaging Size	: 46.5 cm x 18.5 cm x 24.5 cm

- 12V Adaptor
- Extra Long 3.5M Power Cable
- Easy to Read Digital Pressure Gauge
- Pressure Hose

RCW20 CORDLESS IMPACT WRENCH

20V



INCLUDE : User Manual, Warranty Card, 2 Pcs Battery, Charger

SPECIFICATION

Voltage	: 20 Volt
Battery Current	: 4 Ah
Drive	: 1/2" (13 mm)
No load Speed	: 0 - 2,400 rpm
Torque Max	: 320 Nm
Speed Setting	: 2 posisi
Battery	: Lithium-ion
Motor	: Brushless
Weight	: 3.5 kg

Packaging Information

Case Qty	: 5 pcs/ctn
G.W/N.W	: 19.5 Kg/18 kg
Packaging Size	: 64.5 cm x 36.5 cm x 34 cm

- High performance brushless motor
- Powerful maximum torque of 320N.m
- 1 hour quick time battery charge
- Lithium-ion provides longer run time

RCG20 CORDLESS GRINDER 20V



INCLUDE : User Manual, Warranty Card, 1 Pcs Battery, Charger

SPECIFICATION

Voltage	: 20 Volt
Battery Current	: 3 Ah
Disc Diameter	: 100 mm (4")
No load Speed	: 8500 rpm
Speed Setting	: 2 position
Battery	: Lithium-ion
Weight	: 3.5 kg

Packaging Information

Case Qty	: 5 pcs/ctn
G.W/N.W	: 19.5 Kg/18 kg
Packaging Size	: 64.5 cm x 36.5 cm x 34 cm

- High performance brushless motor
- Adjustable safety protect guard for disc
- 1 hour quick time battery charger
- Lithium-ion provides longer run time

RCP0150 CORDLESS POLISHER 150 MM



INCLUDE : User Manual, Warranty Card, 1 Pcs Battery, Charger

SPECIFICATION

Voltage	: 20 Volt
Battery Capacity	: 4.0 Ah Li-ion)
Disc Diameter	: 150 mm (6")
No load Speed	: 1.500-6.800 rpm
Speed Variable	: 6 Posisi
Spindle Size	: M14x2
Weight	: 3.4 Kg

Packaging Information

Case Qty	: 2 pcs/ctn
G.W/N.W	: 7.62 Kg/7.30 kg
Packaging Size	: 50 cm x 21.5 cm x 36 cm

- Brushless Motor Longer Service Life, Low Noise & Strong Power
- 6 Variable Speed Control 1500-6800RPM for maximum performance
- 4.0 Ah Lithium Ion Battery Lithium-ion provides longer run time







RYOBI
RYOBI CORDLESS IMPACT WRENCH 20V
Battery Voltage: 20V
No load speed: 0-2,600 RPM
Max torque: 320 N·m
SN: 32820052457

RCRH26 CORDLESS ROTARY HAMMER 26 MM



INCLUDE : User Manual, Warranty Card, 2 Pcs Battery, Charger

RCCS185 CORDLESS CIRCULAR SAW 185 MM



INCLUDE : User Manual, Warranty Card, 1 Pcs Battery, Charger

RCRS2 CORDLESS RECIPROCATING SAW 2



INCLUDE : User Manual, Warranty Card, 1 Pcs Battery, Charger

SPECIFICATION

Voltage	: 20 Volt
Battery Capacity	: 4.0 Ah (Li-ion)
Motor Type	: Brushless
No load Speed	: 0-1.350 rpm
Blow Per Minute	: 0-5.000 ipm
Max. Capacity	: 26mm
Bit Type	: SDS-PLUS
Weight	: 6,5 Kg

Packaging Information

Case Qty	: 4 pcs/ctn
G.W/N.W	: 23.8 Kg/21.8 kg
Packaging Size	: 52 cm x 42.5 cm x 35.5 cm

- Powerful Brushless motor delivers powerful impact energy
- 4 in 1 Multi-Function Hammer Drill
- Comfortable Rubberised Grip
- 4.0 Ah Lithium Ion Battery & 1 Hours Fast Charge Time

SPECIFICATION

Voltage	: 20 Volt
Battery Capacity	: 4.0 Ah
Spindle Diameter	: 12mm
No load Speed	: 3800 rpm
Max. Blade Diameter	: 185 mm
Max. Cutting Depth 45°	: 41mm
Weight	: 4.6 kg

Packaging Information

Case Qty	: 4 pcs/ctn
G.W/N.W	: 19.2 Kg/18.2 kg
Packaging Size	: 46 cm x 32.5 cm x 42 cm

- Powerful Brushless motor delivers 3.800 RPM for faster cutting
- Longer run time & Battery life 4.0 Ah Lithium-ion
- Comfortable Rubberised Grip

SPECIFICATION

Voltage	: 20 Volt
Battery Capacity	: 1.5 Ah
Strokes Per Minute	: 3000 spm
Length of Stroke	: 15mm
Max.Cutting Capacity(pipe)	: 50 mm(2")
Max.Cutting Capacity(wood)	: 50 mm(2")
Weight	: 3,2 Kg

Packaging Information

Case Qty	: 5 pcs/ctn
G.W/N.W	: 14.5 Kg/12.5 kg
Packaging Size	: 48 cm x 35 cm x 30 cm

- Aluminium gearbox for increases durability 6 Variable Speed Control 1500-6800RPM for
- Light weight to easily control with single hand
- Less vibration to operate comfortably

RCKS16 CORDLESS KNAPSACK SPRAY 16 L



SPECIFICATION

Battery Capacity	: 12 Volt / 8 Ah
Capacity	: 16 L
Motor Pressure	: 90 psi / 6.2 Bar
Pressure / Minute	: 3,6 LPM
Sprayer	: 2 in 1 (Electric / Manual)
Weight	: 5.8 kg

Packaging Information

Case Qty	: 1 pcs/ctn
G.W/N.W	: 5.8 Kg/5.8 kg
Packaging Size	: 38.2 cm x 21 cm x 49.3 cm

- Lever, lance and arm clamps for easy transportation & storage
- Large capacity and highly resistant pressure chamber
- High pressure Premium PVC hose, Stainless steel lance



INCLUDE : User Manual, Warranty Card, 2 Pcs Battery, Charger



RCCH10 CORDLESS CHAINSAW 10



SPECIFICATION

Voltage	: 20 V
Battery Capacity	: 4.0 Ah (Li-ion)
Charge Current	: 1.5 A
Conducting Board Length	: 250 mm
Chainsaw speed	: 0-20m/s
Weight	: 4.7 Kg

Packaging Information

Case Qty	: 2 pcs/ctn
G.W/N.W	: 11.20 Kg/9.20 kg
Packaging Size	: 53 cm x 23.5 cm x 20.5 cm

- Powerful Brushless motor delivers powerful strength to complete the heavy duty
- No gas, oil mixing or full starts with reduced maintenance and low noise levels
- Variable speed trigger and high chain speed
- Automatic chain lubrication with large oil reservoir



INCLUDE : User Manual, Warranty Card, 2 Pcs Holder, 1 Pcs Microfiber, Handle





ACCESSORIES



AC-CW014

CUTTING WHEEL DOUBLE LAYER 105 MM X 1.2 MM X 16 MM (4")



Selling Point Information

- For Stainless Steel & Metal
- Suitable to Any Brand Grinder
- High Quality Materials
- Sharper & Faster

SAFETY INSTRUCTION




TECHNICAL INFORMATION

CUTTING WHEEL DOUBLE LAYER 105 MM X 1.2 MM X 16 MM (4") is cutting wheel Versatile and irreplaceable quality, giving you the convenience of cutting iron and metal materials with medium surfaces plus a very hard hardness level increases work efficiency as well as a level of precision and has super long durability.

SPECIFICATION


Size : 100 x 1,2 x 16 mm (4")

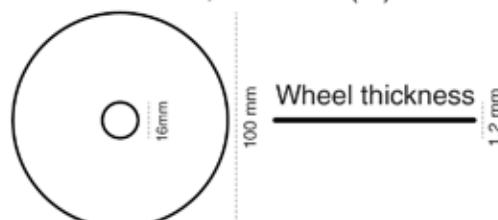

Packaging Information

Qty	: 20 pc/inner
Case Qty	: 600 pcs/ctn
G.W/N.W	: 16 Kg/15 kg
Packaging Size	: 36 cm x 23 cm x 26.5 cm

AC-CW017 CUTTING WHEEL 180 MM X 1,6 MM

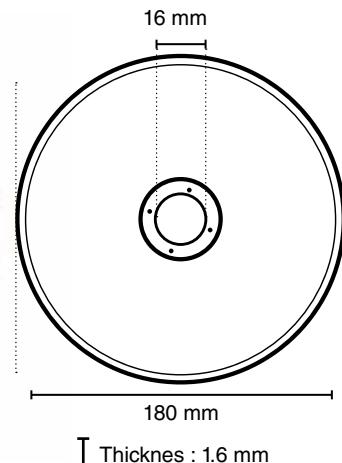

DESCRIPTION

Size : 180 x 1.6 mm
MAX.RPM : 15,300


Packaging Information

Qty : 8 pc/inner
Case Qty : 200 pcs/ctn
G.W/N.W : 20 Kg/19 kg
Packaging Size : 38 cm x 20 cm x 26.5 cm

- For stainless steel & metal
- Suitable to any brand grinder
- High quality material



AC-DD018 DIAMOND DISC DRY 110 X 10 X 1.8 MM (4")

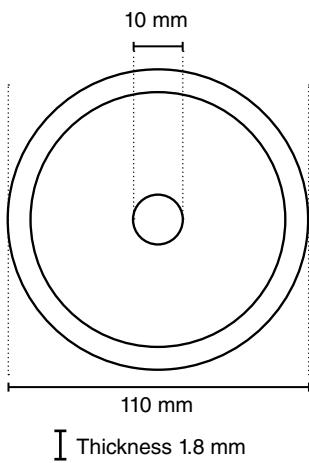

DESCRIPTION

Size : 110 X 10 X 1.8 mm
MAX.RPM : 15,300


Packaging Information

Qty : 12 pcs/inner
Case Qty : 120 pcs/ctn
G.W/N.W : 15 Kg/14 kg
Packaging Size : 29 cm x 23 cm x 21 cm

- For use on tile, granite, marble, concrete & bricks
- Usable on angle grinders & marble cutters



AC-DD019 DIAMOND DISC WET 110 X 10 X 1.8 MM (4")

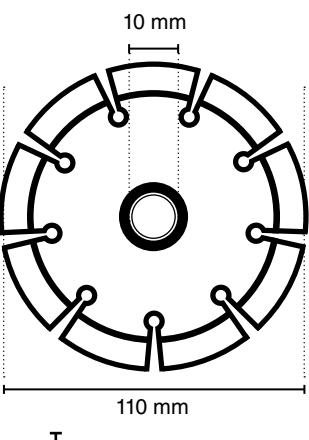

DESCRIPTION

Size : 110 X 10 X 1.8 mm
MAX.RPM : 15,300


Packaging Information

Qty : 12 pcs/inner
Case Qty : 120 pcs/ctn
G.W/N.W : 15 Kg/14 kg
Packaging Size : 29 cm x 24 cm x 21 cm

- For use on tile, granite, marble, concrete & bricks
- Usable on angle grinders & marble cutters



AC-DD180 DIAMOND WHEEL TURBO 110 X 10 X 1.2 MM (4")

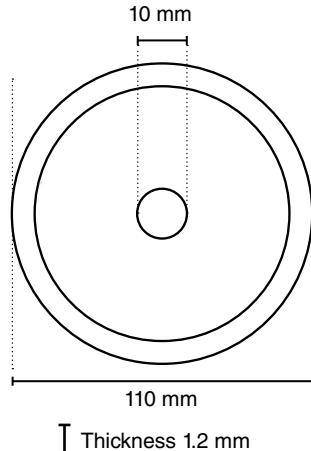

DESCRIPTION

Size : 110 X 10 X 1.2 mm (4")
MAX.RPM : 15.300


Packaging Information

Qty : 10 pcs/inner
Case Qty : 200 pcs/ctn
G.W/N.W : 19.3 Kg/18.3 kg
Packaging Size : 40.5 cm x 31 cm x 21 cm

- For Use ON Tile, Granits, Marble, Concrete & Brica
- Usable On Angle Grinder & Marble Cutters
- Sharper & Faster



CUP BRUSH TWIST

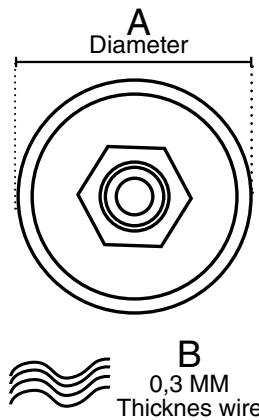

- for used to bind and clean heavy impurities such as rust, iron scale, oysters
- usable on angle grinders
- More Stronger

DESCRIPTION

ITEM CODE	A (MM)	B (MM)	MAX RPM
AC-CB013	75 (3")	0,3	12,500
AC-CB012	100 (4")	0,3	8,500

Packaging Information (AC-CB013)


Qty : 10 pcs/inner
Case Qty : 60 pcs/ctn
G.W/N.W : 19.96 Kg/18 kg
Packaging Size : 60 cm x 39 cm x 26 cm

Packaging Information (AC-CB012)

Qty : 4 pcs/inner
Case Qty : 24 pcs/ctn
G.W/N.W : 14 Kg/13 kg
Packaging Size : 66 cm x 25 cm x 32 cm



AC-GW154 GRINDING WHEEL DOUBLE LAYER 100 MM X 6 MM X16 MM (4")

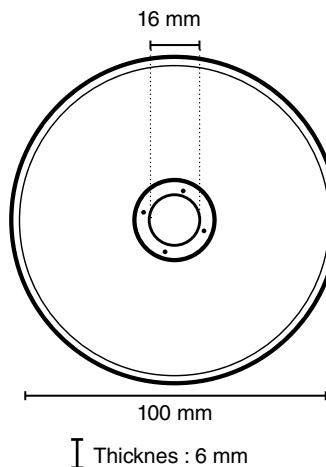

DESCRIPTION

Size : 100 X 6 X 16 mm (4")
MAX.RPM : 15.300


Packaging Information

Qty : 25 pcs/inner
Case Qty : 200 pcs/ctn
G.W/N.W : 21 Kg/20 kg
Packaging Size : 45 cm x 23 cm x 20 cm

- For Stainless Steel & Metal
- Suitable to Any Brand Grinder
- High Quality Materials



CUP BRUSH CRIMPED

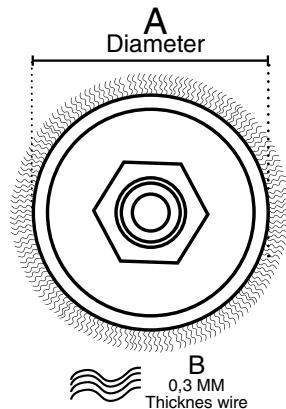

- For used to bind and clean heavy impurities such as rust, iron scale, oysters
- Usable on angle grinders
- More Stronger

DESCRIPTION

ITEM CODE	A (MM)	B (MM)	MAX RPM
AC-CB011	75 (3")	0,3	12,500
AC-CB010	100 (4")	0,3	8,500

Packaging Information (AC-CB011)


Qty : 10 pcs/inner
Case Qty : 60 pcs/ctn
G.W/N.W : 18 Kg/17 kg
Packaging Size : 61 cm x 39.5 cm x 26.8 cm

Packaging Information (AC-CB011)

Qty : 4 pcs/inner
Case Qty : 24 pcs/ctn
G.W/N.W : 12 Kg/11 kg
Packaging Size : 66 cm x 26 cm x 32 cm



TWIST KNOT TWISTED



Packaging Information (AC-TK135)

Qty : 1 pc/inner
Case Qty : 30 pcs/ctn
G.W/N.W : 16 Kg/14 kg
Packaging Size : 51 cm x 32.5 cm x 19 cm

- Suitable for any brand grinder
- High quality Materials
- Easy to use

DESCRIPTION

ITEM CODE	A (MM)	B (MM)	MAX RPM
AC-TK133	100 (4")	0.5	6,000
AC-TK134	125 (5")	0.5	6,000
AC-TK135	150 (6")	0.5	6,000
AC-TK136	200 (8")	0.5	6,000

Packaging Information (AC-TK133)


Qty : 1 pc/inner
Case Qty : 60 pcs/ctn
G.W/N.W : 13 Kg/12 kg
Packaging Size : 34 cm x 23 cm x 33 cm

Packaging Information (AC-TK134)

Qty : 1 pc/inner
Case Qty : 40 pcs/ctn
G.W/N.W : 14 Kg/13 kg
Packaging Size : 41 cm x 27 cm x 25 cm



CIRCULAR BRUSH CRIMPED

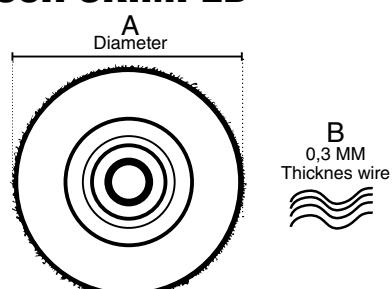

Packaging Information (AC-CL004)

Qty : 1 pcs/inner
Case Qty : 30 pcs/ctn
G.W/N.W : 18 Kg/16 kg
Packaging Size : 51 cm x 18.5 cm x 36 cm

- Suitable for any brand grinder
- High quality Materials
- Easy to use

DESCRIPTION

ITEM CODE	A (MM)	B (MM)	MAX RPM
AC-CL002	100 (4")	0.3	6,000
AC-CL003	125 (5")	0.3	6,000
AC-CL004	150 (6")	0.3	6,000
AC-CL005	200 (8")	0.3	6,000

Packaging Information (AC-CL002)

Qty : 1 pcs/inner
Case Qty : 60 pcs/ctn
G.W/N.W : 15.5 Kg/13.05 kg
Packaging Size : 34 cm x 22 cm x 32 cm

Packaging Information (AC-CL003)


Qty : 1 pcs/inner
Case Qty : 40 pcs/ctn
G.W/N.W : 14.05 Kg/12.05 kg
Packaging Size : 41 cm x 26 cm x 25 cm



Packaging Information (AC-CL005)

Qty : 1 pcs/inner
Case Qty : 20 pcs/ctn
G.W/N.W : 18 Kg/16 kg
Packaging Size : 43 cm x 21 cm x 38 cm

CIRCULAR SAW BLADE 7 1/4" & 10"

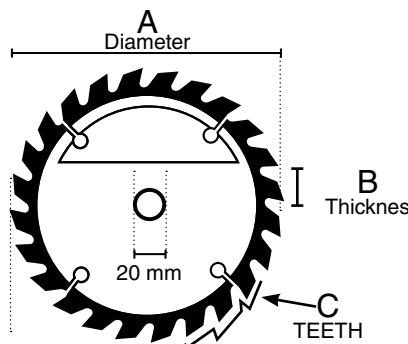


DESCRIPTION

ITEM CODE	A (MM)	B (MM)	C (TEETH)
AC-BD192	185	1.6	24
AC-BD193	185	1.6	40
AC-BD194	185	1.6	60
AC-BD195	185	1.6	80
AC-BD196	255	2.4	40
AC-BD197	255	2.4	60
AC-BD198	255	2.4	100
AC-BD199	255	2.4	120

- For Cutting wood
- Suitable for 4" Circular
- High Quality Material
- Sharper & faster



CIRCULAR SAW BLADE 40, 60 & 72 TEETH

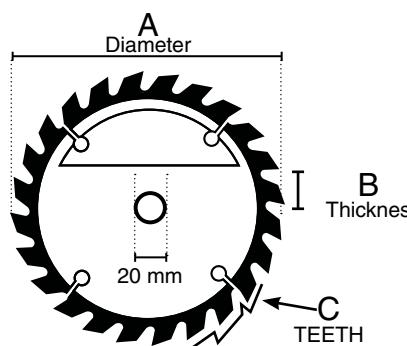

- For Cutting wood
- Suitable for 4" Circular
- High Quality Material
- Sharper & faster

DESCRIPTION

ITEM CODE	A (MM)	B (MM)	C (TEETH)	MAX RPM
AC-BD142	100	100	40	12,000
AC-BD191	100	100	60	12,000
AC-BD190	100	100	72	12,000

Packaging Information (AC-BD142)


Qty : 4 pcs/inner
Case Qty : 100 pcs/ctn
G.W/N.W : 8.5 Kg/8.5 kg
Packaging Size : 27 cm x 19.8 cm x 15 cm

Packaging Information (AC-BD191)


Qty : 20 pcs/inner
Case Qty : 100 pcs/ctn
G.W/N.W : 8.5 Kg/8.5 kg
Packaging Size : 31 cm x 21 cm x 15 cm

Packaging Information (AC-BD190)

Qty : 20 pcs/inner
Case Qty : 100 pcs/ctn
G.W/N.W : 8.5 Kg/8.5 kg
Packaging Size : 31.5 cm x 21 cm x 15.6 cm

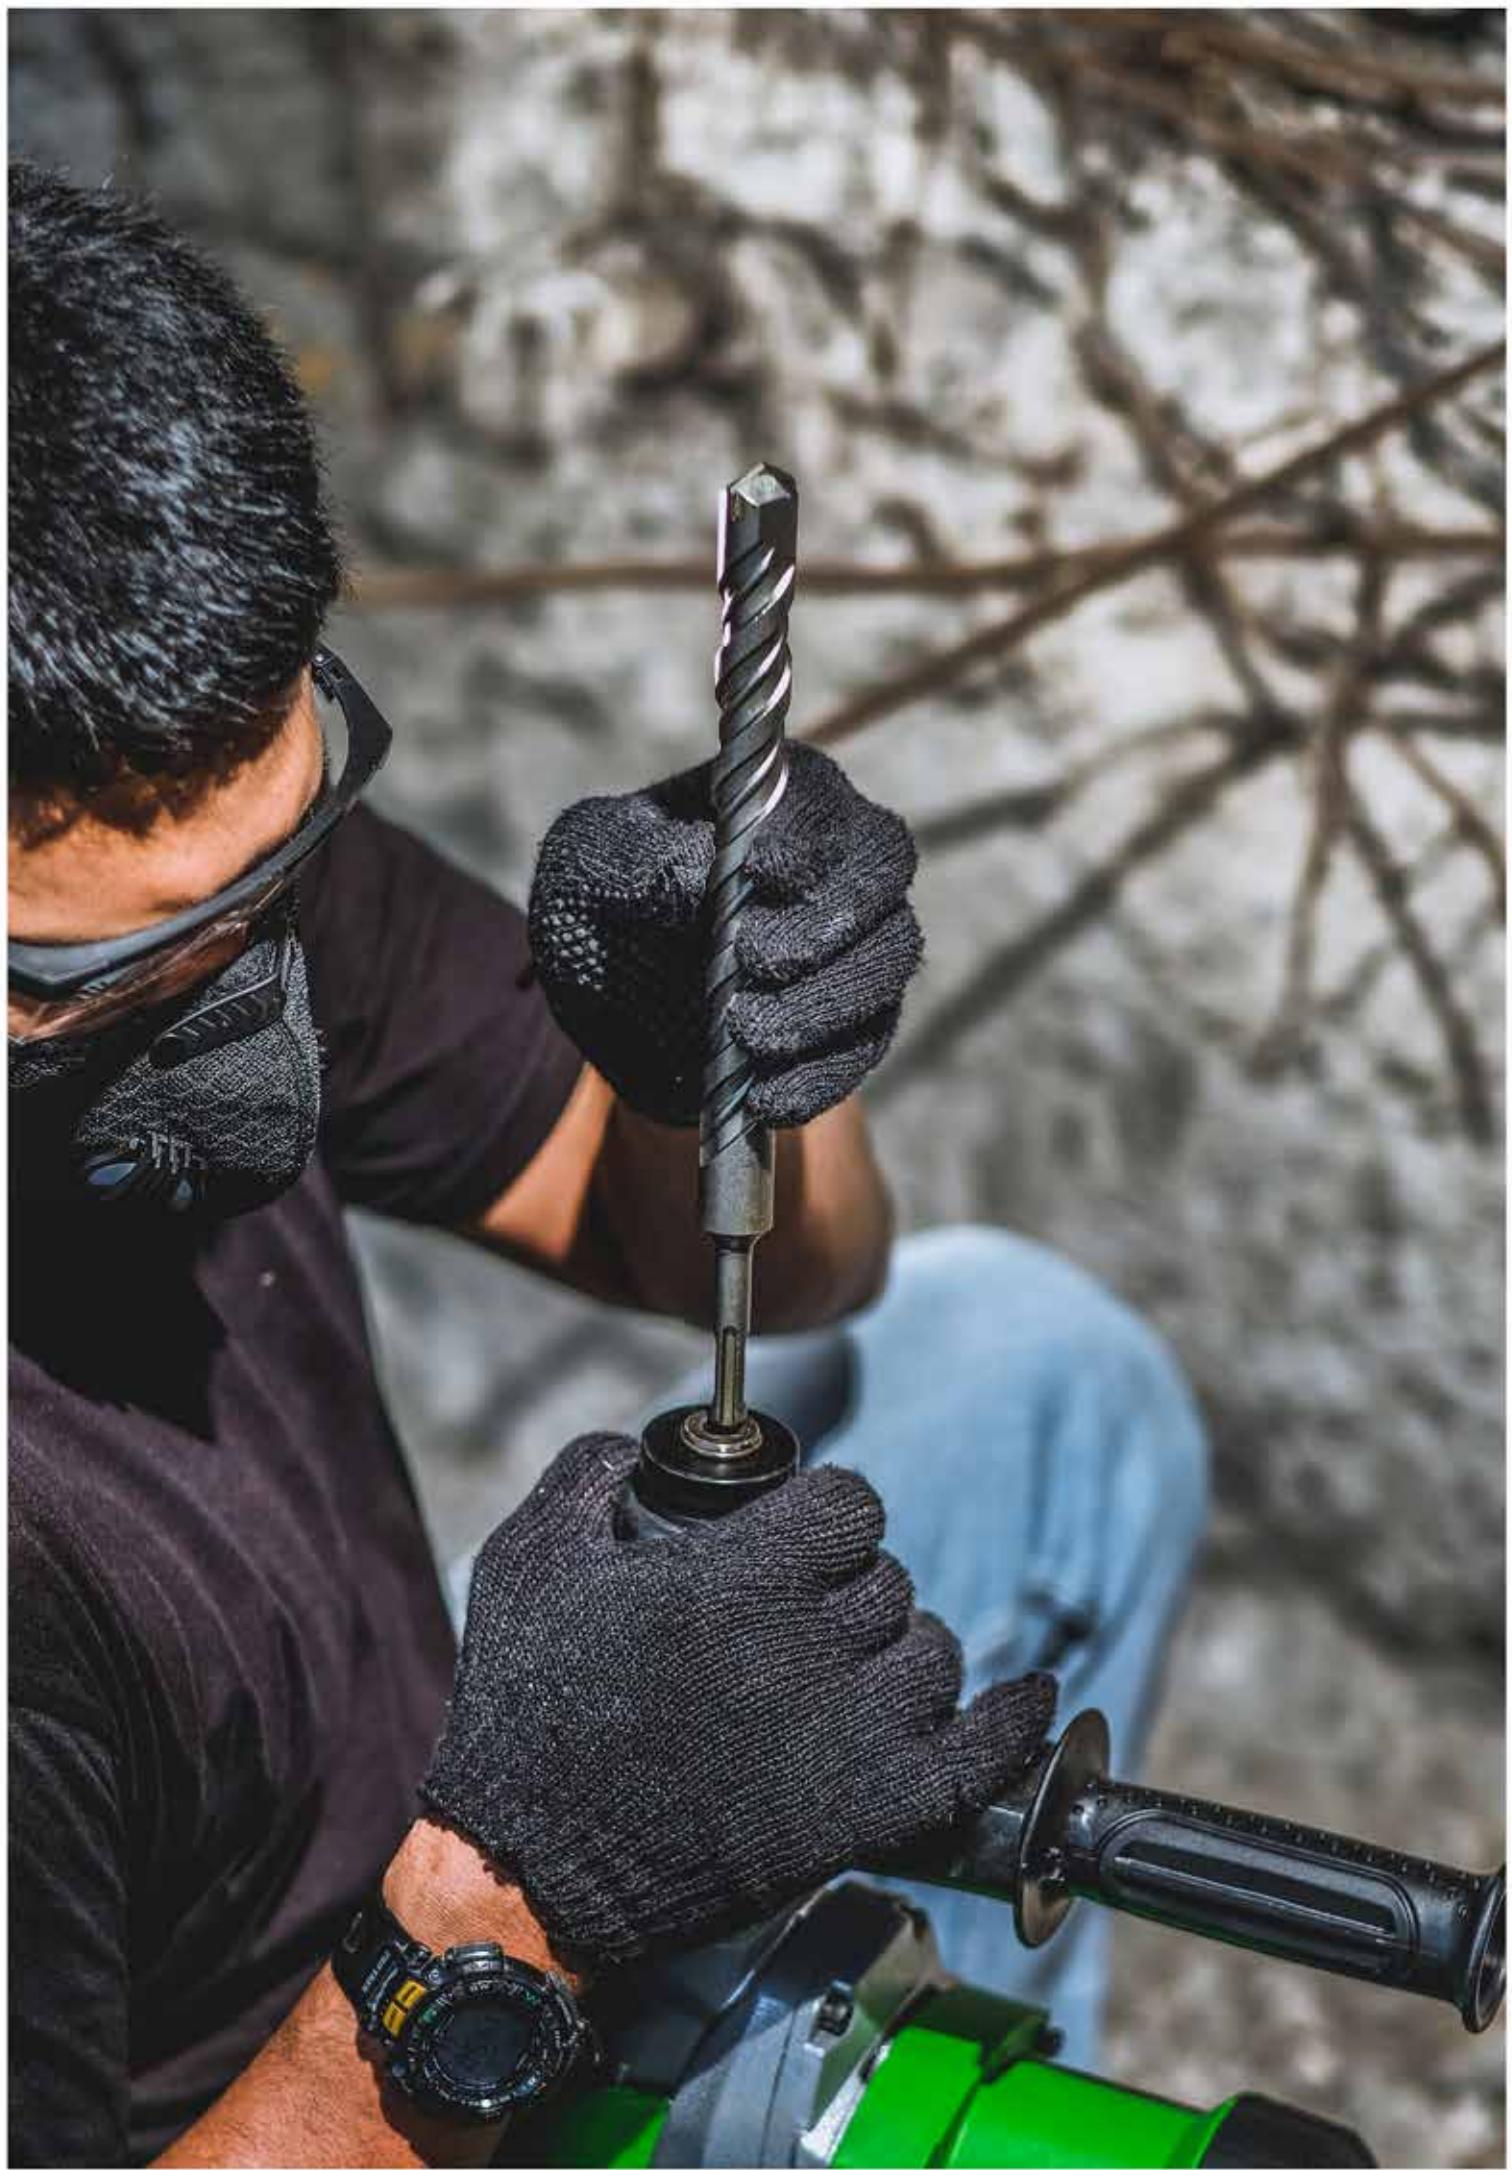

MULTI CUTTER 4" X 40 T & 60 T



- For Cutting wood, plastic,aluminium
- Suitable for 4" Grinder
- High Quality Material
- Sharper & faster

DESCRIPTION

AC-BD145	
Size	: 100 mm (4") X 40 TEETH
MAX.RPM	: 7,500
AC-BD200	
Size	: 100 mm (4") X 60 TEETH
MAX.RPM	: 7,500

Packaging Information (AC-BD145)

Qty	: 25 pcs/inner
Case Qty	: 100 pcs/ctn
G.W/N.W	: 9 Kg/9 kg
Packaging Size	: 28 cm x 21 cm x 25.5 cm

Packaging Information (AC-BD200)

Qty	: 20 pcs/inner
Case Qty	: 100 pcs/ctn
G.W/N.W	: 8.5 Kg/8.5 kg
Packaging Size	: 30 cm x 21 cm x 15 cm

MULTI CUTTER 7 1/4" X 60 T & 80 T



- For Cutting wood, plastic,aluminium
- Suitable for 4" Grinder
- High Quality Material
- Sharper & faster

DESCRIPTION

AC-BD201	
Size	: 185 X 1.6 X 60 T
MAX.RPM	: 7,000
AC-BD202	
Size	: 185 X 1.6 X 80 T
MAX.RPM	: 7,000

Packaging Information (AC-BD201)

Qty	: 20 pcs/inner
Case Qty	: 60 pcs/ctn
G.W/N.W	: 15.5 Kg/15.5 kg
Packaging Size	: 27.5 cm x 23 cm x 20 cm

Packaging Information (AC-BD202)

Qty	: 10 pcs/inner
Case Qty	: 60 pcs/ctn
G.W/N.W	: 15.5 Kg/15.5 kg
Packaging Size	: 28 cm x 22 cm x 20 cm

ALUMINIUM CUTTER 100 T & 120 T



- Ideal For Cutting Aluminium
- Suitable for 10" Miter Saw
- TCT Material Provide Excellent Wear And Heat Resistance

DESCRIPTION


AC-BD203	
Size	: 10" X 100 T
MAX.RPM	: 7,000
AC-BD204	
Size	: 10" X 120 T
MAX.RPM	: 7,000

Packaging Information (AC-BD203)

Qty	: 1 pcs/inner
Case Qty	: 25 pcs/ctn
G.W/N.W	: 17 Kg/17 kg
Packaging Size	: 31.5 cm x 31 cm x 12 cm

Packaging Information (AC-BD204)

Qty	: 1 pcs/inner
Case Qty	: 25 pcs/ctn
G.W/N.W	: 17 Kg/17 kg
Packaging Size	: 31.5 cm x 31 cm x 12 cm

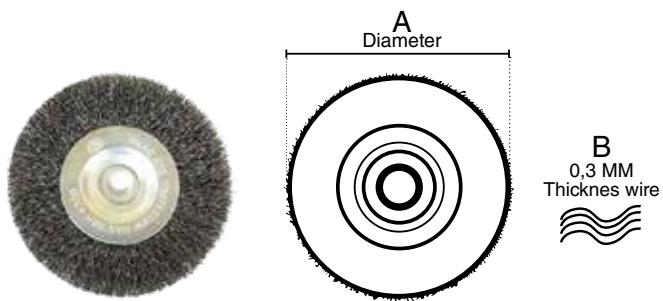TWIST KNOT CRIMPED**Packaging Information (AC-TK131)**

Qty : 1 pc/inner
Case Qty : 30 pcs/ctn
G.W/N.W : 11 Kg/9 kg
Packaging Size : 50 cm x 32.5 cm x 19 cm

- Suitable for any brand grinder
- High quality Materials
- Easy to use

Packaging Information (AC-TK132)

Qty : 1 pc/inner
Case Qty : 20 pcs/ctn
G.W/N.W : 14 Kg/12 kg
Packaging Size : 43 cm x 21 cm x 39 cm

**DESCRIPTION**

ITEM CODE	A (MM)	B (MM)	MAX RPM
AC-TK129	100 (4")	0.3	6,000
AC-TK130	125 (5")	0.3	6,000
AC-TK131	150 (6")	0.3	6,000
AC-TK132	200 (8")	0.3	6,000

Packaging Information (AC-TK129)

Qty : 1 pc/inner
Case Qty : 60 pcs/ctn
G.W/N.W : 8 Kg/7 kg
Packaging Size : 34 cm x 22 cm x 32 cm

Packaging Information (AC-TK130)

Qty : 1 pc/inner
Case Qty : 40 pcs/ctn
G.W/N.W : 15 Kg/6 kg
Packaging Size : 41 cm x 26.5 cm x 23 cm

**AC-BD205
CHAIN CARVING DISC 4"****DESCRIPTION**

Size : 100 mm (4")
MAX.RPM : 13,000

Packaging Information

Qty : 16 pcs/inner
Case Qty : 64 pcs/ctn
G.W/N.W : 13.5 Kg/13.5 kg
Packaging Size : 47 cm x 30 cm x 35 cm

- Ideal for wood working
- Suitable for Angle Grinder
- Anti kickback action
- Wide application

**AC-CW016
CUTTING WHEEL DOUBLE LAYER
355mmx3mmx25mm (14")****DESCRIPTION**

Size : 355 mm x 3 mm x 25 mm (14")
MAX.RPM : 4,300

Packaging Information

Qty : 5 pcs/inner
Case Qty : 25 pcs/ctn
G.W/N.W : 17 Kg/18 kg
Packaging Size : 36 cm x 36 cm x 10 cm

- For stainless steel & metal
- Suitable to any brand grinder
- High quality material



**AC-WW221
FLUX CORE WIRE 0.8 MM 1 KG
E71T-GS**



DESCRIPTION

Size	: 0.8 mm
Type	: AWS E71T-GS
Packaging Information	
Qty	: 1 pcs/inner
Case Qty	: 10 pcs/ctn
G.W/N.W	: 11.5 Kg/11.5 kg
Packaging Size	: 28 cm x 12 cm x 23 cm

- Standard AWS E71T-GS, Glassess Flux, Easy To Weld
- Low Spatter, Full Slag Coverage, Easy Slag Removal
- Single And Multi Pass Welding



**AC-DB219
MOUNTED STONE 1/4"
SET 5 PCS**



DESCRIPTION

Packaging Information	
Qty	: 24 pcs/inner
Case Qty	: 96 pcs/ctn
G.W/N.W	: 11.7 Kg/11.7 kg
Packaging Size	: 42 cm x 27 cm x 32 cm

- Shapes Include Tree, Cone, Large Cone, Cylindrical & Ball
- Ideal For Sharpening & Grinding Steel
- 6mm Shanks For Compatibility With Die Grinder & Drills



**AC-HS179
HOLE SAW KIT 11 PCS**



DESCRIPTION

Packaging Information	
Qty	: 5 pcs/inner
Case Qty	: 20 pcs/ctn
G.W/N.W	: 12 Kg/12 kg
Packaging Size	: 47.5 cm x 28.5 cm x 41 cm

- Ideal For Wood Working
- Cut Smooth, Clean Accurate Holes Through Up To 25 mm
- Includes 8 Piece Hole Saw, 2 PC Arbor & 1 PC Hex Key Wrench



AC-CB220 WIRE WHEEL CUP BRUSH SET 5 PCS



DESCRIPTION

Suitable For : Drills
Material : High Carbon Steel Wire
Max. RPM : 4,500 rpm


Packaging Information

Qty : 1 pcs/inner
Case Qty : 60 pcs/ctn
G.W/N.W : 20 Kg/20 kg
Packaging Size : 53 cm x 33 cm x 49 cm

- Suitable For a Variety Of Surfaces, metal, wood and other materials
- Easily remove heavy corrosion, rust, paint, splash, and scale
- More durable, stable, and safe



AC-BD239 BRUSH CUTTER BLADE 305 MM

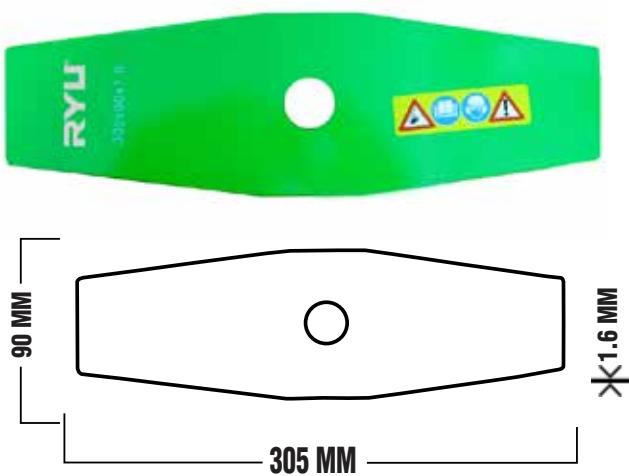

DESCRIPTION

Dimension : 305 x 90 x 1.6 MM
Inside Diameter : 25.4 MM
Max. RPM : 11,500 rpm

Packaging Information

Qty : 1 pcs/inner
Case Qty : 50 pcs/ctn
G.W/N.W : 13.9 Kg/13.9 kg
Packaging Size : 34 cm x 22 cm x 9 cm

- Hardened Carbon steel for High Durability
- Universal Fit either 1" (25.4mm)
- Suitable for cutting different grass, weeds, brush and shrubs



HOLLOW DRILL CORE BIT TCT 30 & 50 MM



DESCRIPTION

AC-DB241
Total Length : 72 MM
Diameter : 30 MM
Material : Carbon Steel

AC-BD242
Total Length : 72 MM
Diameter : 50 MM
Material : Carbon Steel

- Made of carbide tipped metal material, very durable
- Simple operation, easy to use and fast perforated
- Used for drilling walls, stones, bricks, or installation of air-conditioning etc




AC-DB107

SDS PLUS

Selling Point Information

- SDS plus-1 Drill Bit is optimized for drilling in concrete
- 2-cutter Tungsten Carbide plate makes the bit extra tough
- 2-flute U-shape flute design provides effective dust removal and standard lifetimes
- Compatible all rotary hammer with SDS plus holder

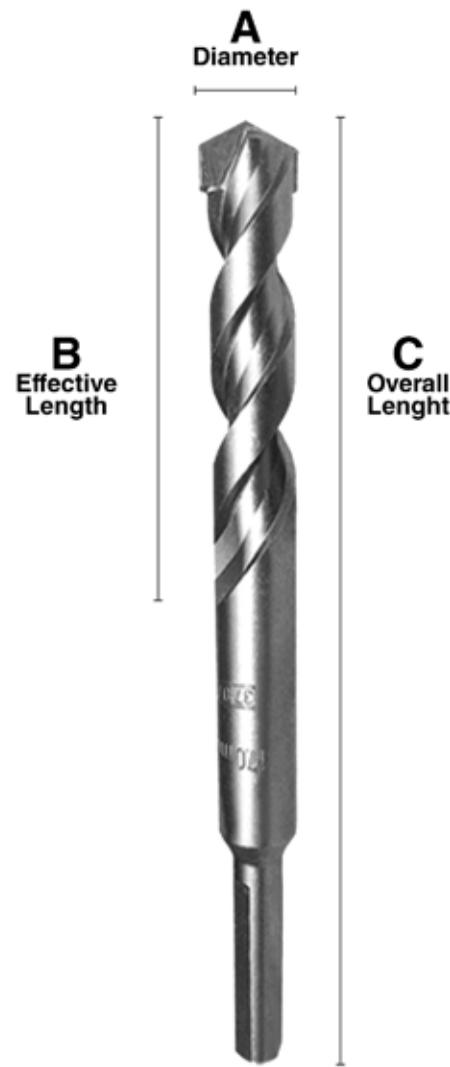

TECHNICAL INFORMATION

RYU (AC) RYU SDS PLUS AC-DB107 is optimized for drilling concrete. Its 2-cutter Tungsten Carbide plate makes the bit extra tough while its 2-flute U-shape flute design provides effective dust removal and standard lifetime. The bit is intended for use on masonry and concrete. It is compatible with all rotary hammers with SDS plus holder.

ITEM CODE	A (MM)	B (MM)	C (MM)
AC-DB107	5.0	50	110
AC-DB108	5.5	50	110
AC-DB109	6.0	50	110
AC-DB110	6.0	100	160
AC-DB111	6.5	100	160
AC-DB112	7.0	100	160
AC-DB113	8.0	50	110
AC-DB114	8.0	100	160
AC-DB115	9.0	150	210
AC-DB116	10.0	100	160
AC-DB117	10.0	150	210
AC-DB118	10.0	200	260
AC-DB119	10.0	240	300
AC-DB120	12.0	100	160
AC-DB121	14.0	150	210
AC-DB122	16.0	150	210
AC-DB123	16.0	240	300
AC-DB124	16.0	400	460
AC-DB125	18.0	240	300
AC-DB126	20.0	240	300
AC-DB127	22.0	200	260
AC-DB128	24.0	200	260





Normal Centering tip
for optimal hole geometry and provides rounder holes




perfectly tilted thread for easier sewage removal



SDS Plus is compatible with all rotary hammer drill brands




HSS PRO DRILL BITS

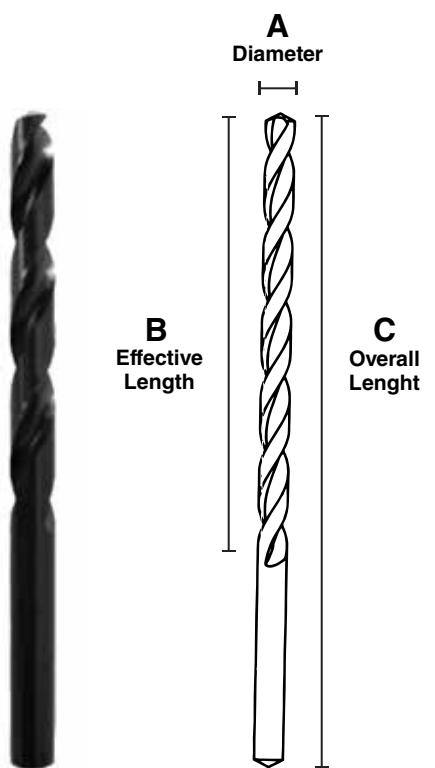

- 5X More Sharper
- 5X More Stronger
- Standard DIN 338
- 135 Point Sharper

Item Code	A (mm)	B (mm)	C (mm)
AC-DB050	1.0	12	34
AC-DB051	1.5	18	40
AC-DB052	2.0	24	49
AC-DB053	2.5	30	57
AC-DB054	3.0	33	61
AC-DB055	3.5	39	70
AC-DB056	4.0	43	75
AC-DB057	4.5	47	80
AC-DB058	5.0	52	86
AC-DB059	5.5	57	93
AC-DB060	6.0	57	93
AC-DB061	6.5	63	101
AC-DB062	7.0	69	109
AC-DB063	7.5	69	109
AC-DB064	8.0	75	117
AC-DB065	8.5	75	117
AC-DB066	9.0	81	125
AC-DB067	9.5	81	125
AC-DB068	10.0	87	133
AC-DB069	10.5	87	133
AC-DB070	11.0	94	142
AC-DB071	11.5	94	142
AC-DB072	12.0	101	151
AC-DB073	12.5	101	151
AC-DB074	13.0	101	151


HSS COBALT DRILL BITS

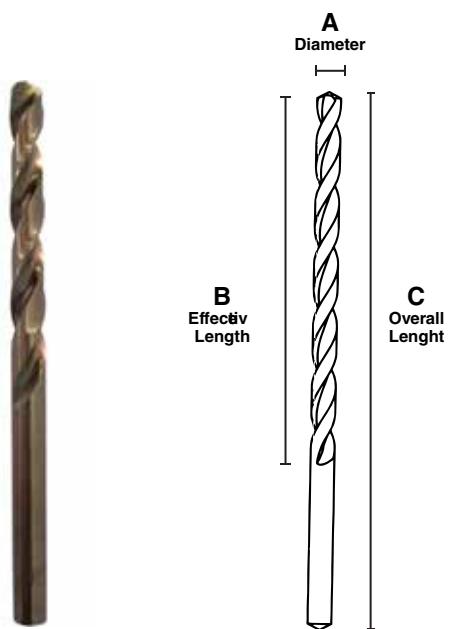

- 5X More Sharper
- 5X More Stronger
- Standard DIN 338
- 135 Point Sharper

Item Code	A (mm)	B (mm)	C (mm)
AC-DB028	2.0	24	49
AC-DB029	2.5	30	57
AC-DB030	3.0	33	61
AC-DB031	3.5	39	70
AC-DB032	4.0	43	75
AC-DB033	4.5	47	80
AC-DB034	5.0	52	86
AC-DB035	5.5	57	93
AC-DB036	6.0	57	93
AC-DB037	6.5	63	101
AC-DB038	7.0	69	109
AC-DB039	7.5	69	109
AC-DB040	8.0	75	117
AC-DB041	8.5	75	117
AC-DB042	9.0	81	125
AC-DB043	9.5	81	125
AC-DB044	10.0	87	133
AC-DB045	11.0	94	142
AC-DB046	12.0	101	151
AC-DB047	13.0	101	151


MASONRY

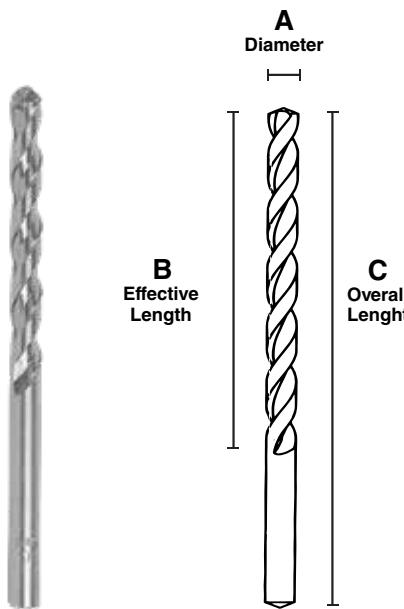

- 5X More Sharper
- 5X More Stronger
- Standard DIN 338
- 135 Point Sharper

Item Code	A (mm)	B (mm)	C (mm)
AC-DB077	3.0	40	70
AC-DB078	3.5	45	75
AC-DB079	4.0	40	70
AC-DB081	5.0	50	80
AC-DB083	5.5	50	80
AC-DB085	6.0	60	100
AC-DB086	6.5	60	100
AC-DB088	7.0	60	110
AC-DB090	8.0	80	125
AC-DB091	10.0	80	125
AC-DB092	10.0	80	140
AC-DB093	12.0	90	140
AC-DB094	12.0	90	160
AC-DB096	14.0	90	200
AC-DB098	16.0	90	200
AC-DB100	17.0	90	200
AC-DB102	19.0	100	200
AC-DB104	22.0	100	200
AC-DB105	25.0	210	300

SDS PLUS FLAT CHISEL 22 X 14 X 280 MM

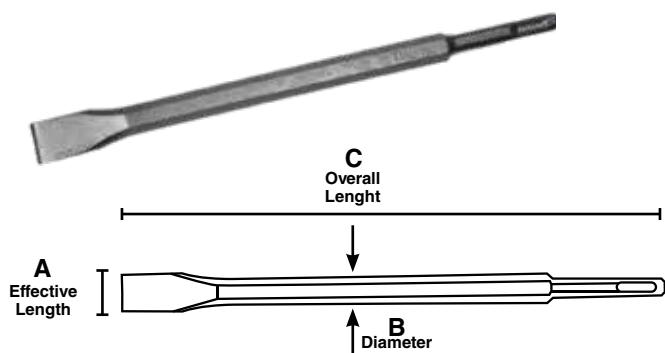

DESCRIPTION


ITEM CODE	A (MM)	B (MM)	C (MM)
AC-CH026	22.0	14.0	280

Packaging Information

Qty : 1 pc/inner
Case Qty : 50 pcs/ctn
G.W/N.W : 15 Kg/14 kg
Packaging Size : 32 cm x 20 cm x 16 cm

- 5X More Stronger
- Suitable for any brand Rotary Hammer
- High Quality Materials
- Easy to Use SDS Plus

HEXAGON FLAT CHISEL

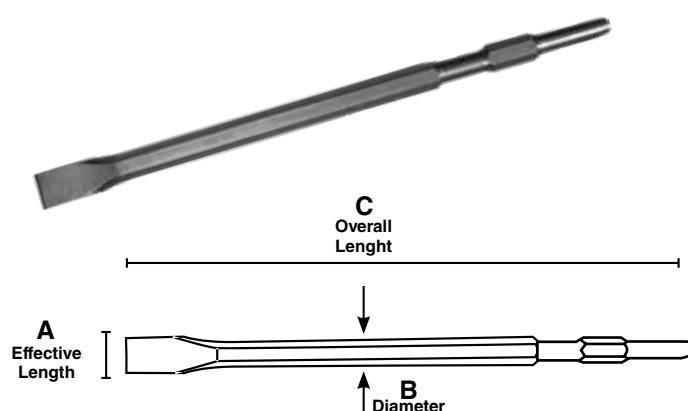

DESCRIPTION

ITEM CODE	A (MM)	B (MM)	C (MM)
AC-CH020	25.0	17	280
AC-CH021	25.0	17	400
AC-CH022	35.0	30	450

Packaging Information (AC-CH020)

Qty : 1 pc/inner
Case Qty : 50 pcs/ctn
G.W/N.W : 22 Kg/21 kg
Packaging Size : 32 cm x 24 cm x 13 cm

Packaging Information (AC-CH022)


Qty : 1 pc/inner
Case Qty : 10 pcs/ctn
G.W/N.W : 17.5 Kg/16.5 kg
Packaging Size : 49 cm x 19 cm x 8 cm

Packaging Information (AC-CH021)

Qty : 1 pc/inner
Case Qty : 25 pcs/ctn
G.W/N.W : 17 Kg/16 kg
Packaging Size : 43 cm x 15 cm x 11 cm

- 5X More Stronger
- Suitable for any brand Demolition Hammer
- High Quality Materials
- Easy to Use Hexagon Shank

SDS PLUS POINTED CHISEL 14 X 280 MM

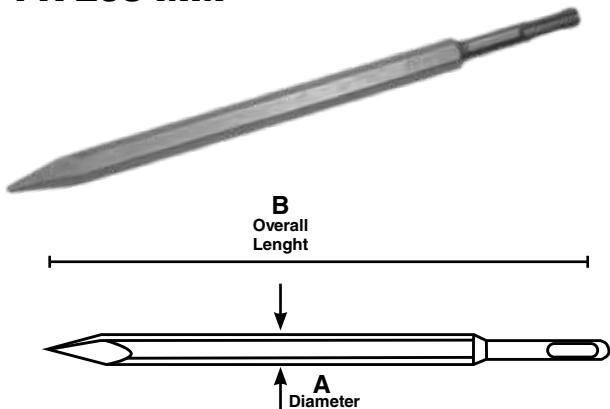

DESCRIPTION


ITEM CODE	A (MM)	B (MM)
AC-CH027	14.0	280

Packaging Information

Qty : 1 pc/inner
Case Qty : 50 pcs/ctn
G.W/N.W : 14 Kg/15 kg
Packaging Size : 32 cm x 20 cm x 16 cm

- 5X More Stronger
- Suitable for any brand Rotary Hammer
- High Quality Materials
- Easy to Use SDS Plus

HEXAGON POINTED CHISEL

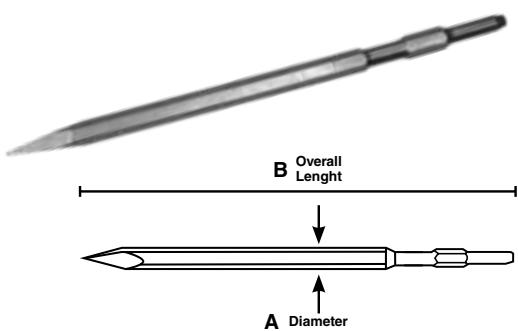

DESCRIPTION

ITEM CODE	A (MM)	B (MM)
AC-CH023	17	280
AC-CH024	17	400
AC-CH025	30	450

Packaging Information (AC-CH023)

Qty : 1 pc/inner
Case Qty : 50 pcs/ctn
G.W/N.W : 21.5 Kg/20.5 kg
Packaging Size : 32 cm x 20 cm x 16 cm

Packaging Information (AC-CH024)

Qty : 1 pc/inner
Case Qty : 25 pcs/ctn
G.W/N.W : 16.5 Kg/15.5 kg
Packaging Size : 43 cm x 16 cm x 10 cm

Packaging Information (AC-CH025)

Qty : 1 pc/inner
Case Qty : 10 pcs/ctn
G.W/N.W : 17 Kg/16 kg
Packaging Size : 49 cm x 15.5 cm x 12 cm

- 5X More Stronger
- Suitable for any brand Demolition Hammer
- High Quality Materials
- Easy to Use Hexagon Shank

HSS PRO SET



DESCRIPTION

ITEM CODE	SIZE
AC-DB075	1 - 10 mm
AC-DB076	1 - 13 mm

Packaging Information (AC-DB075)

Qty : 5 pcs/inner
Case Qty : 20 pcs/ctn
G.W/N.W : 6.6 Kg/6 kg
Packaging Size : 26 cm x 25 cm x 18 cm

Packaging Information (AC-DB076)

Qty : 1 pcs/inner
Case Qty : 10 pcs/ctn
G.W/N.W : 13.5 Kg/12.07 kg
Packaging Size : 31 cm x 25 cm x 22 cm

- 5X More Sharper
- 5X More Stronger
- DIN 338 Standart
- 135° Point Sharper



HSS PRO SET (1-10MM) QTY = 19 PCS

1mm, 1.5mm, 2mm, 2.5mm, 3mm, 3.5mm, 4mm, 4.5mm, 5mm, 5.5mm, 6mm, 6.5mm, 7mm, 7.5mm, 8mm, 8.5mm, 9mm, 9.5mm, 10mm

HSS PRO SET (1-13MM) QTY = 25 PCS

1mm, 1.5mm, 2mm, 2.5mm, 3mm, 3.5mm, 4mm, 4.5mm, 5mm, 5.5mm, 6mm, 6.5mm, 7mm, 7.5mm, 8mm, 8.5mm, 9mm, 9.5mm, 10mm, 10.5mm, 11mm, 11.5mm, 12mm, 12.5mm, 13mm

AC-DB155 DRILL SET 41 PCS BMC



DESCRIPTION

- 11pcs HSS 1.5, 2.0, 2.5, 3.0, 3.5, 4.0, 4.5, 5.0, 5.5, 6.0, 6.5 mm
- 4pcs MASONRY 4, 5, 6, 8 mm
- 4pcs WOOD 4, 5, 6, 8 mm
- 3pcs SLOTTED 4, 6, 7 mm
- 5pcs Torx T15, T20, T25, T30, T40
- 4pcs PHILLIPS #1, #2, #2, #3
- 4pcs POZI DRIVER #1, #2, #2, #3
- 4pcs HEX 3, 4, 5, 6 mm
- 1pc Counter sink
- 1pcs Bit Holder 60mm

Packaging Information

Qty : 1 pc/inner
 Case Qty : 10 pcs/ctn
 G.W/N.W : 6 Kg/5.6 kg
 Packaging Size : 32.5 cm x 18.5 cm x 24.5 cm

- Easy for use
- Comfortable for carry
- Compact design



HSS COBALT SET



DESCRIPTION

ITEM CODE	SIZE
AC-DB048	1 - 10 mm
AC-DB049	1 - 13 mm

- 5X More Sharper
- 5X More Stronger
- DIN 338 Standart
- 135° Point Sharper

HSS COBALT SET (1-10MM) QTY = 19 PCS

1mm, 1.5mm, 2mm, 2.5mm, 3mm, 3.5mm, 4mm, 4.5mm, 5mm, 5.5mm, 6mm, 6.5mm, 7mm, 7.5mm, 8mm, 8.5mm, 9mm, 9.5mm, 10mm

Packaging Information (AC-DB048)

Qty : 1 pc/inner
 Case Qty : 20 pcs/ctn
 G.W/N.W : 6.6 Kg/6 kg
 Packaging Size : 26 cm x 24 cm x 18 cm


HSS COBALT SET (1-13MM) QTY = 25 PCS

1mm, 1.5mm, 2mm, 2.5mm, 3mm, 3.5mm, 4mm, 4.5mm, 5mm, 5.5mm, 6mm, 6.5mm, 7mm, 7.5mm, 8mm, 8.5mm, 9mm, 9.5mm, 10mm, 10.5mm, 11mm, 11.5mm, 12mm, 12.5mm, 13mm

Packaging Information (AC-DB049)

Qty : 1 pc/inner
 Case Qty : 10 pcs/ctn
 G.W/N.W : 13.5 Kg/12.7 kg
 Packaging Size : 32 cm x 26 cm x 22 cm




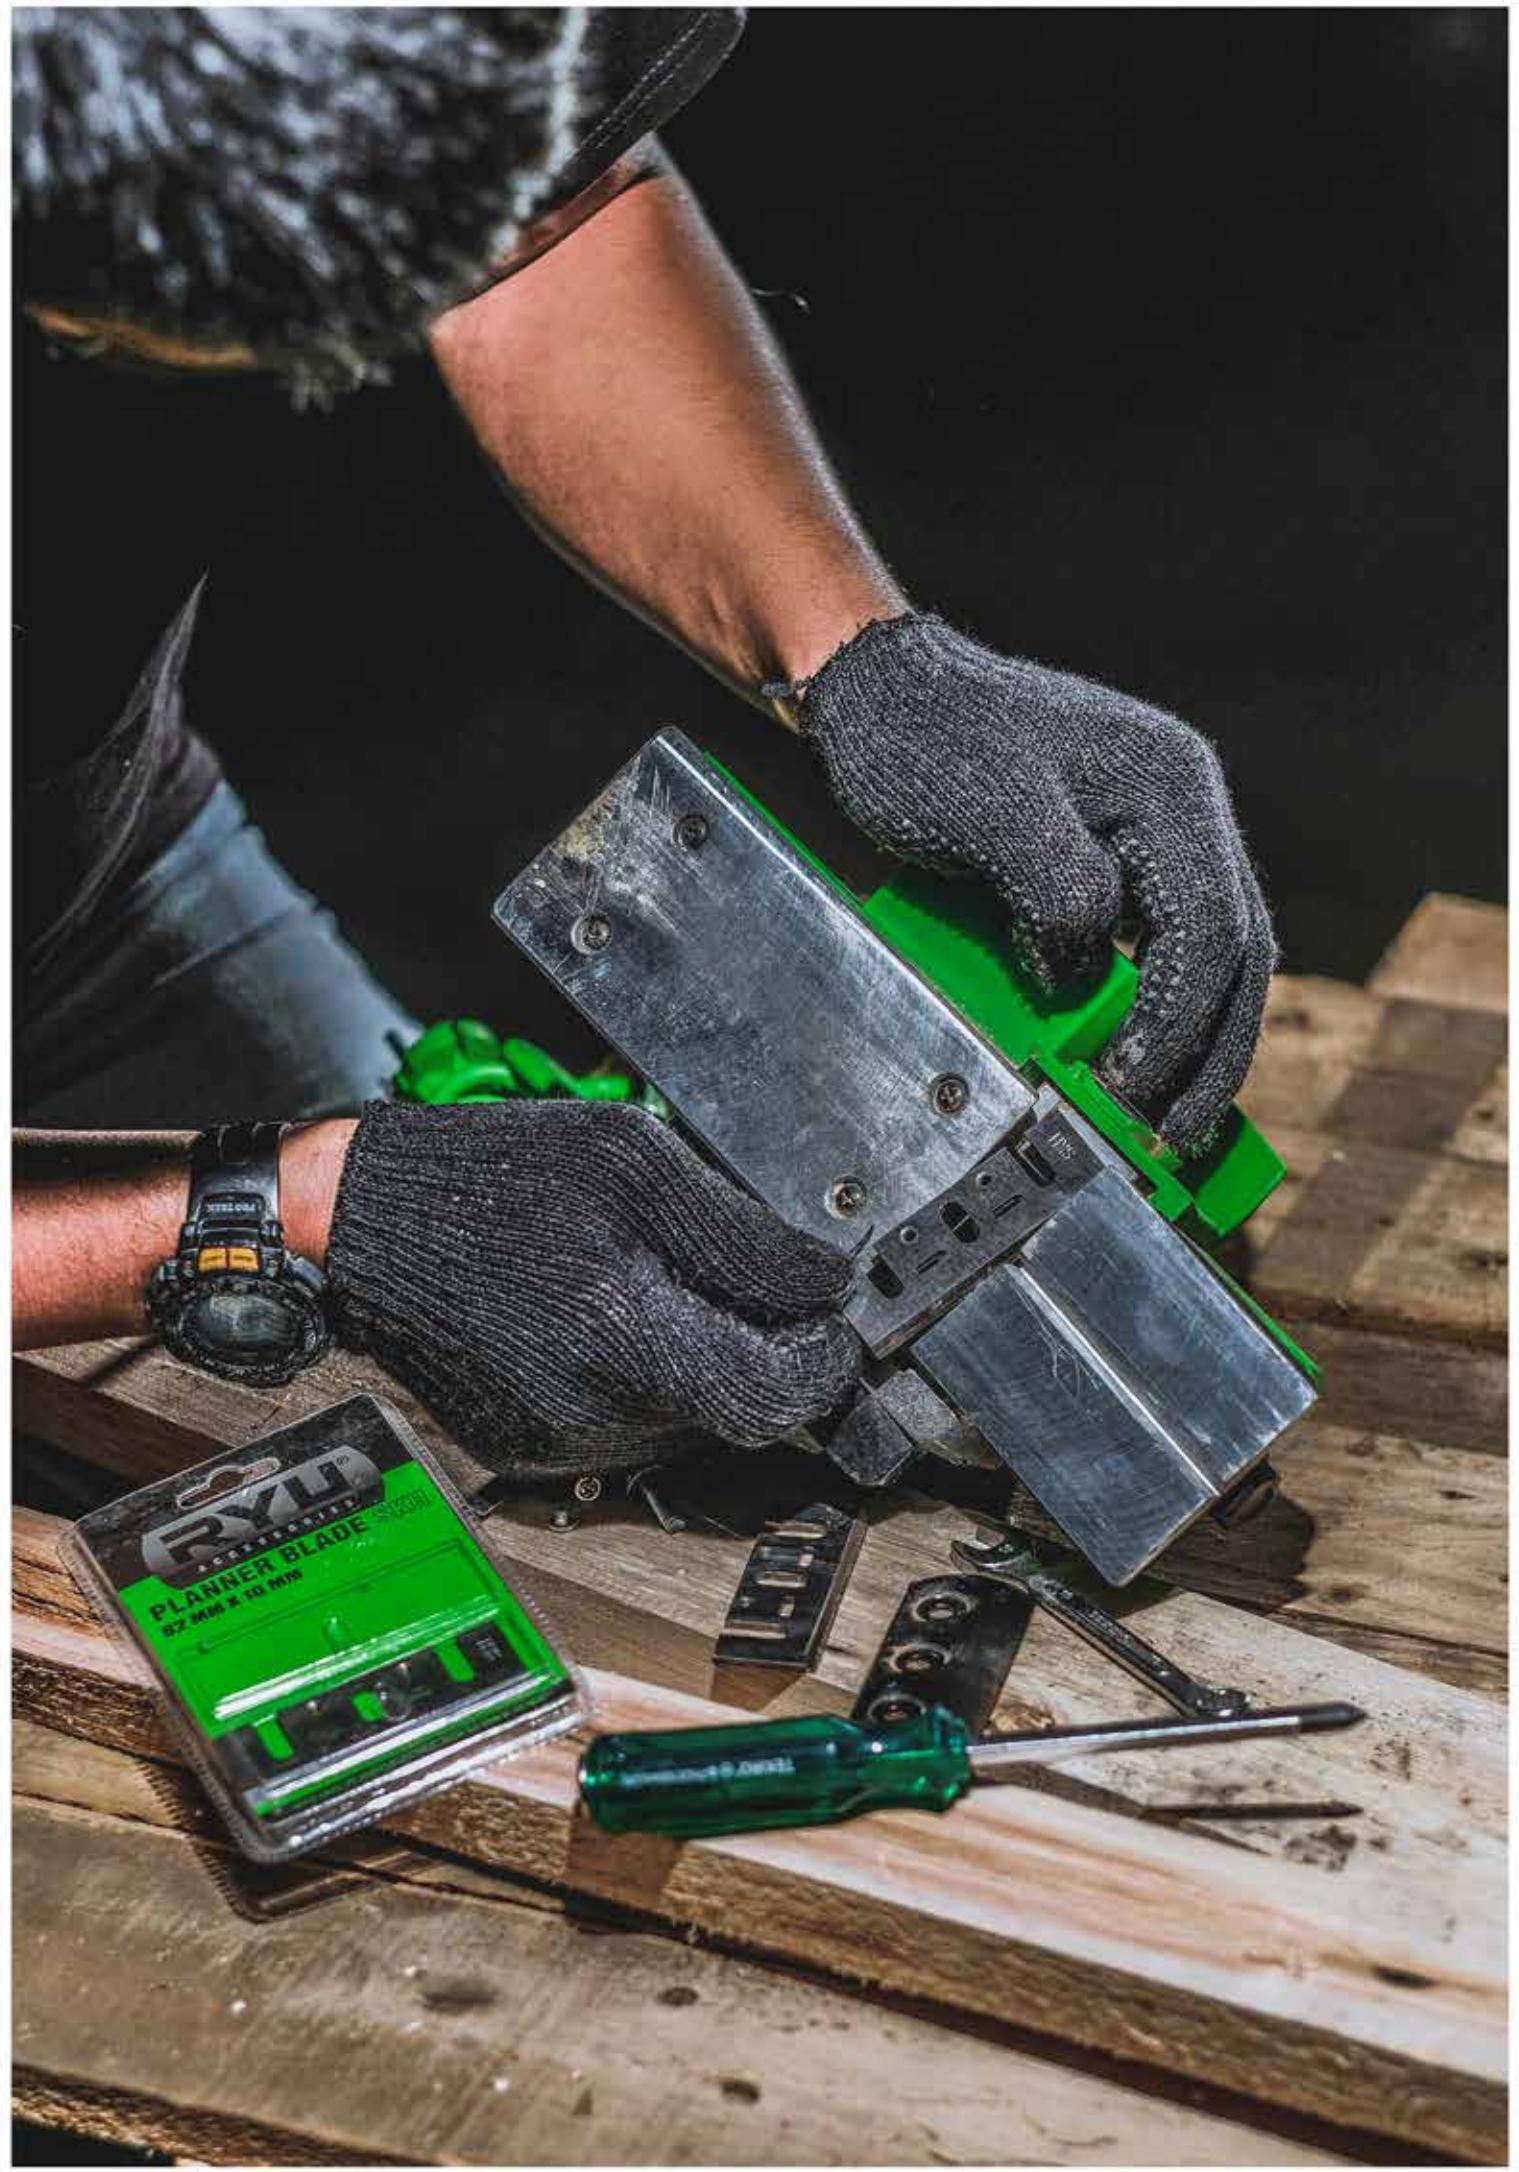

AC-BD144

PLANNER BLADE

SKH 82 MM X 10 MM

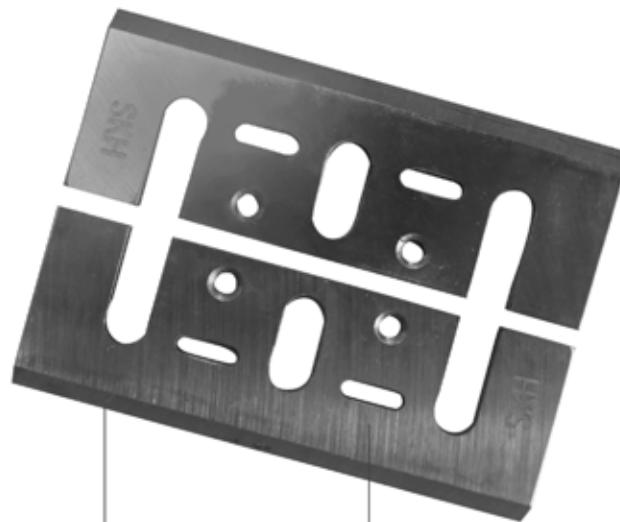

Cutting Edge

- Design for Heavy Duty Cutting
- Re-sharpenable

HSS material

- Heavy Duty
- Heat Resistance

Selling Point Information

- Heavy Duty Cutting
- Solid High Speed Steel
- Re-sharpenable

SAFETY INSTRUCTION



TECHNICAL INFORMATION

RYU (AC) PLANNER BLADE Drawstring blades can be used in RYU (UN) Planner and almost all brands of drawstring machines commonly used in Indonesia. Made of SKH material which is a very hard and heat resistant metal. These shaved blades can be sharpened using a special diamond grinding.



SPECIFICATION

Material	: Metal (KSH)
Product Dimension	: 82 mm x 29 mm x 3 mm
Weight	: 0.1 kg

Packaging Information

Qty	: 20 pcs/inner
Case Qty	: 200 pcs/ctn
G.W/N.W	: 11.5 Kg/11.3 kg
Packaging Size	: 57 cm x 26 cm x 18.5 cm

AC-BD143

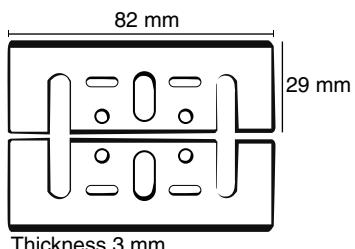PLANNER BLADE TCT 82 MM X 7 MM**DESCRIPTION**


Material : TCT
Dimension : 82 mm x 29 mm x 3 mm
Weight : 0,1 Kg

Packaging Information

Qty : 20 pcs/inner
Case Qty : 200 pcs/ctn
G.W/N.W : 11,5 Kg/11,3 kg
Packaging Size : 57 cm x 26 cm x 18,5 cm

- Heavy Duty Cutting
- Solid High Speed Steel
- Re-sharpenable

AC-BD152

SEGMENT HSS SAW 3-1/8"**DESCRIPTION**


Material : HSS, M2
Dimension : Ø82
Model : HSS Saw
Color : Black

Packaging Information

Qty : 20 pcs/inner
Case Qty : 120 pcs/ctn
G.W/N.W : 6.5 Kg/6.3 kg
Packaging Size : 58 cm x 35 cm x 18 cm

- For Wood, Plastic, and Metal
- Solid High Stainless Steel
- Re-sharpenable

AC-TE149

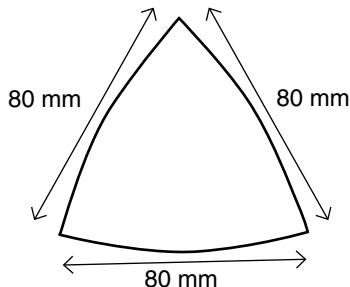TRIANGULAR EVA SENDING PAD 3-1/8"**DESCRIPTION**


Material : 2Cr13
Dimension : 80 x 80 x 80 mm
Model : Sending Pad
Color : Black

Packaging Information

Qty : 20 pcs/inner
Case Qty : 120 pcs/ctn
G.W/N.W : 7.5 Kg/7.2 kg
Packaging Size : 66 cm x 35 cm x 18 cm

- Paste Sand Paper
- Soft Material
- Re-sharpenable

AC-BD140

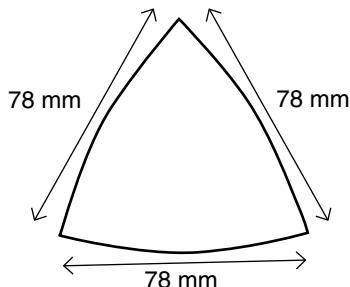BRAZED CARBIDE TRIANGULAR BLADE 3"**DESCRIPTION**

Material : YGB Carbide Grit (30-40 MESH)
Dimension : 78 X 78 X 78 mm
Model : Triangular Blade
Color : Golden


Packaging Information

Qty : 20 pcs/inner
Case Qty : 120 pcs/ctn
G.W/N.W : 9 Kg/8.8 kg
Packaging Size : 58 cm x 35 cm x 18 cm


- For Grind Tiles and Marble Cutting
- Carbide Grit : 60-80 mesh Material
- Re-sharpenable




**AC-BD141
HALF MOON BRAZED CARBIDE
BLADE 2-1/2”**




**AC-BD138
CURVED SCRAPER BLADE 2”**



**AC-SP148
TRIANGLE SAND PAPER**

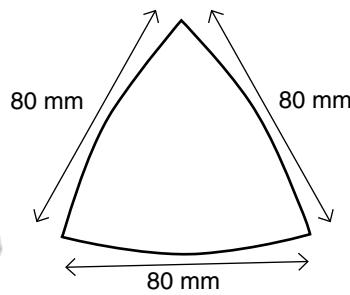

**AC-BD139
HCS SAW BLADE STRAIGHT TOOTH
1-1/4”**

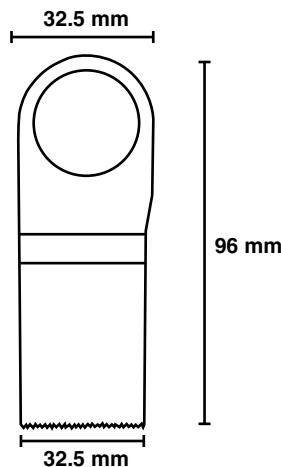

DESCRIPTION

Material : Carbide Grit (60 - 80 MESH)
Dimension : Ø63.5
Model : Half-Moon Blade
Color : Golden

Packaging Information

Qty : 20 pcs/inner
Case Qty : 120 pcs/ctn
G.W/N.W : 7.7 Kg/7.4 kg
Packaging Size : 58 cm x 35 cm x 18 cm

- For Grind Tiles and Marble Cutting
- Carbide Grit : 60-80 mesh Material
- Re-sharpenable

DESCRIPTION

Material : SS301
Dimension : 52 x 74.5 mm
Model : 2" Scraper Blade
Color : Natural Color

Packaging Information

Qty : 20 pcs/inner
Case Qty : 120 pcs/ctn
G.W/N.W : 6.8 Kg/6.5 kg
Packaging Size : 66 cm x 35 cm x 18 cm

- For Removing Floor, Wall, Cement
- Solid High Stainless Steel
- Re-sharpenable

DESCRIPTION

Material : Grit 60/80/120/each 2 pcs
Dimension : 80 x 80 x 80 mm
Model : Sand Paper
Color : Natural Color

Packaging Information

Qty : 20 pcs/inner
Case Qty : 120 pcs/ctn
G.W/N.W : 7.5 Kg/7.2 kg
Packaging Size : 66 cm x 35 cm x 18 cm

- Fast and easy for removal and replacement
- Open coat makes an even and consistent scratch pattern
- High strength resin bond system
- High quality material

DESCRIPTION

Material : Blade SKS Holder 65Mn
Dimension : 32.5 x 32.5 x 96 mm
Model : Straight Tooth
Color : Black

Packaging Information


Qty : 20 pcs/inner
Case Qty : 120 pcs/ctn
G.W/N.W : 5.5 Kg/5.3 kg
Packaging Size : 50 cm x 32.5 cm x 18 cm

- Heavy Duty Cutting
- Suitable for any brand Multi Oscillating Cutter Grinder
- Solid High Speed Steel
- Re-sharpenable
- Plug and Play



AC-BD153

BI-METAL STRAIGHT SAW BLADE OBLIQUE TOOTH 1-3/8"

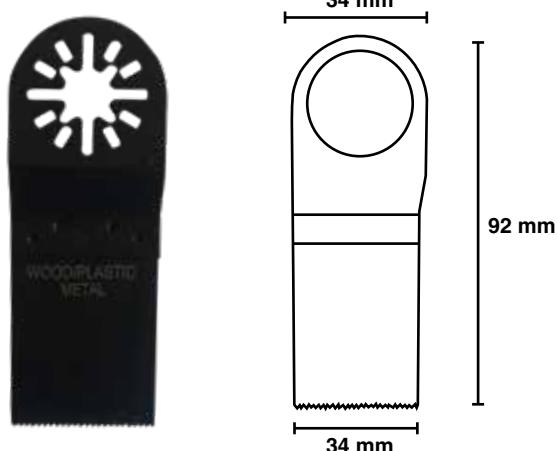

DESCRIPTION

Material	: Blade M42 Holder 65Mn
Dimension	: 34 x 34 x 92 mm
Model	: Oblique Tooth
Color	: Black

Packaging Information


Qty	: 20 pcs/inner
Case Qty	: 120 pcs/ctn
G.W/N.W	: 6 Kg/5.8 kg
Packaging Size	: 50 cm x 29.5 cm x 18 cm

- Heavy Duty Cutting
- Suitable for any brand Multi Oscilating Cutter Grinder
- Solid High Speed Steel
- Re-sharpenable
- Plug and Play



AC-DB178

FLAT WOOD DRIL BIT SET 6 PCS

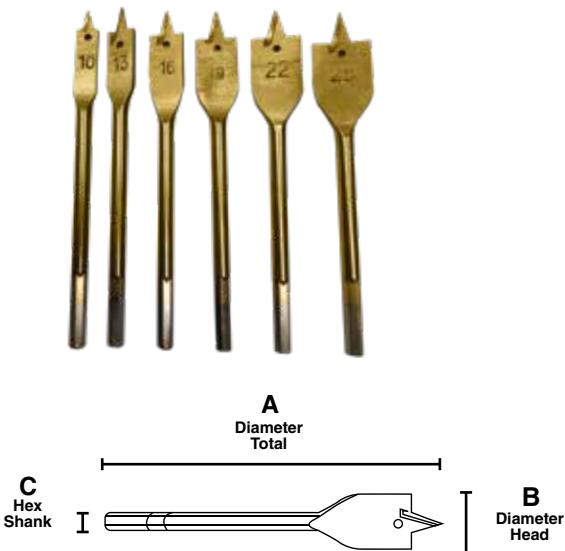

DESCRIPTION

A (MM)	B (MM)	C (MM)
152	10	1/4"
152	13	1/4"
152	16	1/4"
152	19	1/4"
152	22	1/4"
152	25	1/4"


Packaging Information

Qty	: 6 pcs/inner
Case Qty	: 60 pcs/ctn
G.W/N.W	: 17.5 Kg/16.5 kg
Packaging Size	: 38 cm x 24 cm x 33 cm

- Universal hexagon Shank
- High Quality Material
- Suitable for any Brand Drill 3 jaw Chuck



DIAMOND HOLE SAW

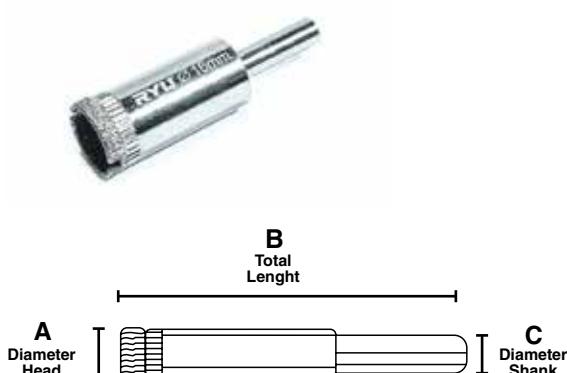


DESCRIPTION

ITEM CODE	A (MM)	B (MM)	C (MM)
AC-HS167	4.0	55	3
AC-HS168	5.0	55	4
AC-HS169	6.0	55	5
AC-HS170	8.0	55	6
AC-HS171	10.0	55	6
AC-HS172	12.0	55	6
AC-HS173	14.0	55	6
AC-HS174	16.0	55	6

- Universal Around Shank
- High Quality Material
- Suitable for any Brand Drill 3 jaw Chuck



BAND SAW BLADE

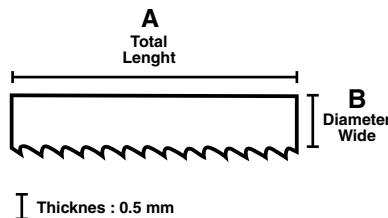

- Lengths to fit the most common band saw sizes.
- High Carbon Steel Material
- For Quick Perfect Cutting
- Resists heat build up for smoother operation and longer



DESCRIPTION

ITEM CODE	A (MM)	B (MM)
AC-BS175	1430	10
AC-BS176	1430	6.3
AC-BS177	1848	10

Packaging Information (AC-BS175)

Qty : 1 pcs/inner
Case Qty : 250 pcs/ctn
G.W/N.W : 12 Kg/11 kg
Packaging Size : 72 cm x 37 cm x 36 cm


Packaging Information (AC-BS176)

Qty : 1 pcs/inner
Case Qty : 250 pcs/ctn
G.W/N.W : 9.5 Kg/8.5 kg
Packaging Size : 72 cm x 37 cm x 36 cm

Packaging Information (AC-BS177)

Qty : 1 pcs/inner
Case Qty : 100 pcs/ctn
G.W/N.W : 8 Kg/7 kg
Packaging Size : 72 cm x 37 cm x 36 cm

FORSTNER BIT

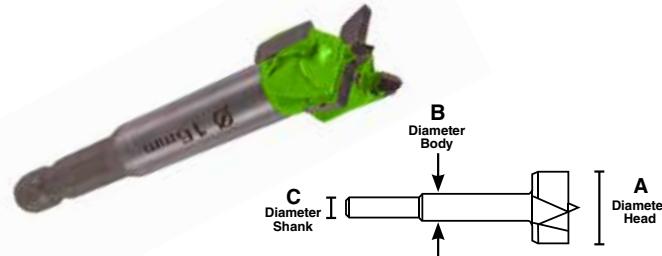

Packaging Information (AC-DB161)

Qty : 12 pcs/inner
Case Qty : 240 pcs/ctn
G.W/N.W : 25.5 Kg/24.5 kg
Packaging Size : 41 cm x 37 cm x 36 cm

Packaging Information (AC-DB162)

Qty : 12 pcs/inner
Case Qty : 240 pcs/ctn
G.W/N.W : 27.5 Kg/26.5 kg
Packaging Size : 41 cm x 37 cm x 36 cm

- Suitable For Standard 3-Jaw Chuck
- with wooden case for easy storage
- Universal Around Shank



DESCRIPTION

ITEM CODE	A (MM)	B (MM)	C (MM)
AC-DB158	16.0	9	7
AC-DB159	18.0	9	7
AC-DB160	22.0	9	7
AC-DB161	30.0	12	9.8
AC-DB162	35.0	12	9.8

Packaging Information (AC-DB158)

Qty : 25 pcs/inner
Case Qty : 300 pcs/ctn
G.W/N.W : 18 Kg/17 kg
Packaging Size : 41 cm x 37 cm x 36 cm



Packaging Information (AC-DB159)

Qty : 25 pcs/inner
Case Qty : 300 pcs/ctn
G.W/N.W : 19 Kg/18 kg
Packaging Size : 41 cm x 37 cm x 36 cm

Packaging Information (AC-DB160)

Qty : 25 pcs/inner
Case Qty : 300 pcs/ctn
G.W/N.W : 20 Kg/19 kg
Packaging Size : 41 cm x 37 cm x 36 cm

AC-DB157 ROUTER BITS 1/4" SET 12 PCS

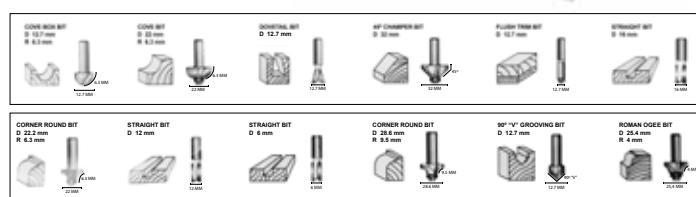

DESCRIPTION


- Multi-AXIS Grinding Creates A 3X Longer Lasting Mirror Finish
- Tri-Metal Blazing
- Anti KickBack Design
- Sinterhip Hi-Density Industrial Chrome
- Round Shank

Packaging Information

Qty : 1 pcs/inner
Case Qty : 40 pcs/ctn
G.W/N.W : 21 Kg/20 kg
Packaging Size : 53 cm x 36 cm x 31 cm



DRILL CHUCK

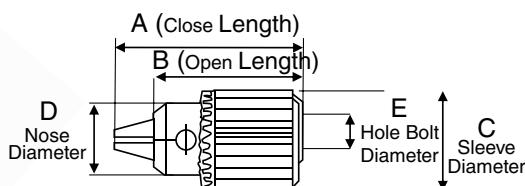10 - 13 MM
(3/8)

- High Speed Steel Material
- Heavy Duty And Stronger
- Design For More Comfortable

DESCRIPTION

SPESIFICATION	A	B	C	D	E
AC-CK163 3/8" X 10 mm	60.4	50	33.1	25	9.3
AC-CK164 3/8" X 13 mm	70.5	57	41	19.2	9.6
AC-CK165 1/2" X 13 mm	70.6	57	42.0	30.7	11.45
AC-CK166 1/2" X 16 mm	86.0	69	50.5	37.7	11.45

13 - 16 MM
(1/2)**Packaging Information (AC-CK165)**

Qty : 12 pcs/inner
Case Qty : 48 pcs/ctn
G.W/N.W : 17.4 Kg/16.9 kg
Packaging Size : 48 cm x 30.5 cm x 23.5 cm

Packaging Information (AC-CK166)

Qty : 8 pcs/inner
Case Qty : 32 pcs/ctn
G.W/N.W : 20.5 Kg/20 kg
Packaging Size : 48 cm x 27.5 cm x 23.5 cm

Packaging Information (AC-CK163)

Qty : 12 pcs/inner
Case Qty : 60 pcs/ctn
G.W/N.W : 12.6 Kg/12.1 kg
Packaging Size : 59.5 cm x 27 cm x 19.5 cm

Packaging Information (AC-CK164)

Qty : 12 pcs/inner
Case Qty : 48 pcs/ctn
G.W/N.W : 16.6 Kg/16.1 kg
Packaging Size : 48 cm x 30.5 cm x 23.5 cm

AC-CB147 CABLE CONNECTOR (MALE)



- More Stronger
- Suitable for any brand INVERTER
- High Quality Materials,
- Plug and play to use

DESCRIPTION

Welding Cable Size : 10 - 25 mm
Max. Current : 200 A
Material : Copper

Packaging Information

Qty : 20 pcs/inner
Case Qty : 500 pcs/ctn
G.W/N.W : 22 Kg/21.5 kg
Packaging Size : 52 cm x 27.5 cm x 28.5 cm

AC-CB146 CABLE CONNECTOR FEMALE (10-25)



- More Stronger
- Suitable for any brand INVERTER
- High Quality Materials,
- Plug and play to use

DESCRIPTION

Welding Cable Size : 10 - 25 mm
Max. Current : 200 A
Material : Copper

Packaging Information

Qty : 20 pcs/inner
Case Qty : 500 pcs/ctn
G.W/N.W : 22.1 Kg/22 kg
Packaging Size : 41 cm x 32 cm x 22.5 cm

AC-BK150 CHAIN SAW BRACKET



- Heavy Duty Cutting
- High Quality Materials
- Plug and Play to use



DESCRIPTION

Guide Bar Materials : Spring Steel
Chain Materials : High Carbon Steel
Connecting Rod Size : M10/M14
Guide Bar Size : 34x6 cm
Total Teeth : 22
Chain Length : 82 cm
Chain Thickness : 4.7 mm
Wood Cutter Diameter : 28 cm
Total Length of Bracket : 39 cm
Handle Height : 18 cm

Packaging Information

Qty : 1 pc/inner
Case Qty : 16 pcs/ctn
G.W/N.W : 23.5 Kg/21.5 kg
Packaging Size : 58 cm x 37 cm x 28 cm

HSS HOLE SAW



Packaging Information (AC-HS181)

Qty : 10 pcs/inner
Case Qty : 300 pcs/ctn
G.W/N.W : 18 Kg/18 kg
Packaging Size : 45 cm x 33 cm x 23.5 cm

Packaging Information (AC-HS182)

Qty : 10 pcs/inner
Case Qty : 300 pcs/ctn
G.W/N.W : 19 Kg/19 kg
Packaging Size : 45 cm x 33 cm x 23.5 cm

Packaging Information (AC-HS183)

Qty : 10 pcs/inner
Case Qty : 300 pcs/ctn
G.W/N.W : 19.5 Kg/19.5 kg
Packaging Size : 45 cm x 33 cm x 23.5 cm

Packaging Information (AC-HS184)

Qty : 10 pcs/inner
Case Qty : 300 pcs/ctn
G.W/N.W : 20 Kg/20 kg
Packaging Size : 45 cm x 33 cm x 23.5 cm

Packaging Information (AC-HS185)

Qty : 10 pcs/inner
Case Qty : 300 pcs/ctn
G.W/N.W : 21 Kg/21 kg
Packaging Size : 45 cm x 33 cm x 23.5 cm

DESCRIPTION

ITEM CODE	SIZE (MM)
AC-HS181	16 MM
AC-HS182	18 MM
AC-HS183	19 MM
AC-HS184	20 MM
AC-HS185	22 MM
AC-HS186	25 MM
AC-HS187	28 MM
AC-HS188	30 MM
AC-HS189	32 MM

Packaging Information (AC-HS186)

Qty : 10 pcs/inner
Case Qty : 300 pcs/ctn
G.W/N.W : 23 Kg/23 kg
Packaging Size : 45 cm x 33 cm x 23.5 cm

Packaging Information (AC-HS187)

Qty : 10 pcs/inner
Case Qty : 180 pcs/ctn
G.W/N.W : 16 Kg/16 kg
Packaging Size : 38 cm x 23.5 cm x 35.5 cm


Packaging Information (AC-HS188)

Qty : 10 pcs/inner
Case Qty : 180 pcs/ctn
G.W/N.W : 18.5 Kg/18.5 kg
Packaging Size : 38 cm x 23.5 cm x 35.5 cm

Packaging Information (AC-HS189)

Qty : 10 pcs/inner
Case Qty : 180 pcs/ctn
G.W/N.W : 17 Kg/17 kg
Packaging Size : 38 cm x 23.5 cm x 35.5 cm

AC-BD240 TRIMMER HEAD (BRUSH CUTTER) 120 MM



DESCRIPTION

Materials	: Iron
Thickness	: 1.5 MM
Material String	: Nylon
Finishing	: Painting
Inside Diameter	: 25.4 MM
Outside Diameter	: 120 MM
String	: 10 pcs

- High Quality Material
- Durable And Long Lasting String Nylon
- Safe And Strong Design
- Easy To Replace And Install

Packaging Information

Qty : - pcs/inner
Case Qty : 100 pcs/ctn
G.W/N.W : - Kg/- kg
Packaging Size : 43 cm x 31.5 cm x 29 cm



SANDPAPER WATERPROOF



- Perfect for sanding wood, metal, plastic and fiberglass, as well as removing old paint
- Excellent for sanding dry and wet, multi purpose, durable
- Convenient for hand using, also can be cut into the size you need

Packaging Information (AC-AB222)

Qty : 100 pcs/inner
Case Qty : 1.000 pcs/ctn
G.W/N.W : 38 Kg/38 kg
Packaging Size : 48 cm x 29 cm x 40 cm

Packaging Information (AC-AB223)

Qty : 100 pcs/inner
Case Qty : 1.000 pcs/ctn
G.W/N.W : 31 Kg/31 kg
Packaging Size : 48 cm x 29 cm x 31 cm

Packaging Information (AC-AB224)

Qty : 100 pcs/inner
Case Qty : 1.000 pcs/ctn
G.W/N.W : 27 Kg/27 kg
Packaging Size : 48 cm x 29 cm x 28 cm

Packaging Information (AC-AB225)

Qty : 100 pcs/inner
Case Qty : 1.000 pcs/ctn
G.W/N.W : 23 Kg/23 kg
Packaging Size : 48 cm x 29 cm x 25 cm

Packaging Information (AC-AB226)

Qty : 100 pcs/inner
Case Qty : 1.000 pcs/ctn
G.W/N.W : 21 Kg/21 kg
Packaging Size : 48 cm x 29 cm x 23 cm

Packaging Information (AC-AB227)

Qty : 100 pcs/inner
Case Qty : 1.000 pcs/ctn
G.W/N.W : 19 Kg/19 kg
Packaging Size : 49 cm x 30.5 cm x 17.5 cm

Packaging Information (AC-AB228)

Qty : 100 pcs/inner
Case Qty : 1.000 pcs/ctn
G.W/N.W : 17 Kg/17 kg
Packaging Size : 48 cm x 29 cm x 16 cm

Packaging Information (AC-AB229)

Qty : 100 pcs/inner
Case Qty : 1.000 pcs/ctn
G.W/N.W : 16 Kg/16 kg
Packaging Size : 48 cm x 29 cm x 15 cm

Packaging Information (AC-BD230)

Qty : 100 pcs/inner
Case Qty : 1.000 pcs/ctn
G.W/N.W : 15.5 Kg/15.5 kg
Packaging Size : 48 cm x 29 cm x 14 cm

DESCRIPTION

ITEM CODE	GRIT
AC-AB222	P60
AC-AB223	P80
AC-AB224	P100
AC-AB225	P120
AC-AB226	P150
AC-AB227	P240
AC-AB228	P280
AC-AB229	P320
AC-AB230	P360
AC-AB231	P400
AC-AB232	P500
AC-AB233	P600
AC-AB234	P800
AC-AB235	P1000
AC-AB236	P1200
AC-AB237	P1500
AC-AB238	P2000

Packaging Information (AC-BD231)

Qty : 100 pcs/inner
Case Qty : 1.000 pcs/ctn
G.W/N.W : 15 Kg/15 kg
Packaging Size : 48 cm x 29 cm x 14 cm

Packaging Information (AC-BD232)

Qty : 100 pcs/inner
Case Qty : 1.000 pcs/ctn
G.W/N.W : 14 Kg/14 kg
Packaging Size : 48 cm x 29 cm x 14 cm

Packaging Information (AC-BD233)

Qty : 100 pcs/inner
Case Qty : 1.000 pcs/ctn
G.W/N.W : 13 Kg/13 kg
Packaging Size : 48 cm x 29 cm x 14 cm

Packaging Information (AC-BD234)

Qty : 100 pcs/inner
Case Qty : 1.000 pcs/ctn
G.W/N.W : 12.5 Kg/12.5 kg
Packaging Size : 48 cm x 29 cm x 12.5 cm

Packaging Information (AC-BD235)

Qty : 100 pcs/inner
Case Qty : 1.000 pcs/ctn
G.W/N.W : 12 Kg/12 kg
Packaging Size : 48 cm x 29 cm x 12 cm

Packaging Information (AC-BD236)

Qty : 100 pcs/inner
Case Qty : 1.000 pcs/ctn
G.W/N.W : 11.5 Kg/11.5 kg
Packaging Size : 48 cm x 29 cm x 11.5 cm

Packaging Information (AC-BD237)

Qty : 100 pcs/inner
Case Qty : 1.000 pcs/ctn
G.W/N.W : 11 Kg/11 kg
Packaging Size : 48 cm x 29 cm x 11 cm

Packaging Information (AC-BD238)

Qty : 100 pcs/inner
Case Qty : 1.000 pcs/ctn
G.W/N.W : 11 Kg/11 kg
Packaging Size : 48 cm x 29 cm x 11 cm

CONNECTING HEX SHANK 200 & 250 MM



DESCRIPTION

AC-BD243
Materials : Carbon Steel
Length : 200 MM
Diameter : 22 MM

AC-BD244
Materials : Carbon Steel
Length : 250 MM
Diameter : 22 MM

- Made of carbide tipped metal material, very durable
- Simple operation, easy to use and fast perforated
- Used for drilling walls, stones, bricks or installation of air-conditioning etc

Packaging Information (AC-BD243)

Qty : 1 pcs/inner
Case Qty : 50 pcs/ctn
G.W/N.W : - Kg/- kg
Packaging Size : - cm x - cm x - cm

Packaging Information (AC-BD244)

Qty : 1 pcs/inner
Case Qty : 50 pcs/ctn
G.W/N.W : - Kg/- kg
Packaging Size : - cm x - cm x - cm



CONNECTING SDS SHANK 200 & 250 MM



DESCRIPTION

AC-BD245
Materials : Carbon Steel
Length : 200 MM
Diameter : 22 MM

AC-BD246
Materials : Carbon Steel
Length : 250 MM
Diameter : 22 MM

- Made of carbide tipped metal material, very durable
- Simple operation, easy to use and fast perforated
- Used for drilling walls, stones, bricks or installation of air-conditioning etc

Packaging Information (AC-BD245)

Qty : 1 pcs/inner
Case Qty : 50 pcs/ctn
G.W/N.W : - Kg/- kg
Packaging Size : - cm x - cm x - cm

Packaging Information (AC-BD246)

Qty : 1 pcs/inner
Case Qty : 50 pcs/ctn
G.W/N.W : - Kg/- kg
Packaging Size : - cm x - cm x - cm






ENGINE



RCP150 COMPRESSOR 30 LITER 1.5 HP

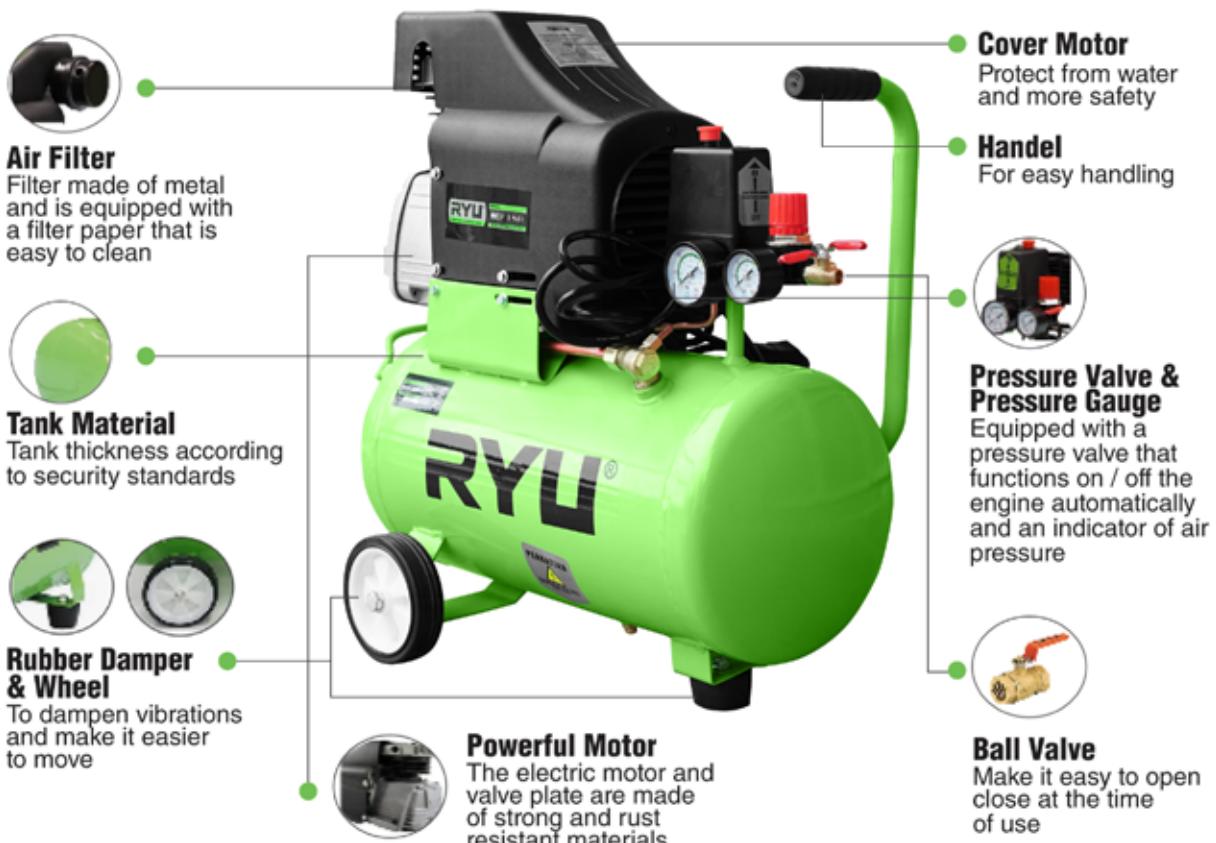

Selling Point Information

- The electric motor and valve plate are made of strong and rust resistant materials
- Equipped with a two-way ball-valve
- Equipped with a Pressure Valve and two pressure gauges
- The air filter is made of metal

SAFETY INSTRUCTION



INCLUDE : User Manual, Warranty Card, Oil Machine, Cover Engine Oil, Air Filter

TECHNICAL INFORMATION

The RYU Compressor-1 design was adopted for the manufacture of this compressor so as to further increase the efficiency of the motor, combined with the selection of quality materials that make it less prone to damage and rust, this new value design can improve compression efficiency.

The fully automatic control system aims for comfortable, safe and reliable operation. suitable for operating performance at home, workshop, indoors and outdoors so versatile and portable that operation, finishing and maintenance are extremely convenient.

SPECIFICATION

Current	: <7.5 A
Input Power	: <1500 WATT
Rotate Speed	: 2850 rpm ± 10%
Power Cable	: 180 mm
Gas On time	: 90s ± 5
Switch Machine	: 0.8 ± 0.02 Mpa
Downtime	
Restoring Boot	: 0.5 ± 0.02 Mpa
Pressure Switch	
Tank Capacity	: 30 L
Piece Rotor Plate	: 130 Pc
Diameter Piston	: 47 mm
Stroke	: 38

COMPRESSOR



- The electric motor and valve are made of strong and rust resistant materials
- Equipped with a two-way ball-valve
- Equipped with a pressure valve and two pressure gauges
- The air filter is made of metal




INCLUDE : User Manual, Warranty Card, Oil Machine, Cover Engine Oil, Air Filter

SPECIFICATION	RCP 100-1 (1.0 HP)	RCP 200-1 (2 HP)	RCP 250-1 (2.5 HP)
CURRENT	< 3.40 A	< 6.81 A	< 8.63 A
INPUT POWER	< 750 Watt	< 1500 Watt	< 1900 Watt
ROTATE SPEED	2800 ± 10% rpm	2850 ± 10% rpm	2850 ± 10% rpm
POWER CABLE	> 180 mm	> 180 mm	> 180 mm
GAS ON TIME	90s ± 5	100s ± 5	190s ± 5
SWITCH MACHINE DOWNTIME	0.8 ± 0.02 Mpa	0.8 ± 0.02 Mpa	0.8 ± 0.02 Mpa
RESTORING BOOT PRESSURE SWITCH	0.5 ± 0.02 Mpa	0.5 ± 0.02 Mpa	0.5 ± 0.02 Mpa
TANK CAPACITY	25 L	35 L	50 L
PIECE ROTOR PLATE	100 Pc	130 Pc	130 Pc
DIAMETER PISTON	42 mm	47 mm	47 mm
STROKE	35	38	38



RG1500-1

GASOLINE GENERATOR SET

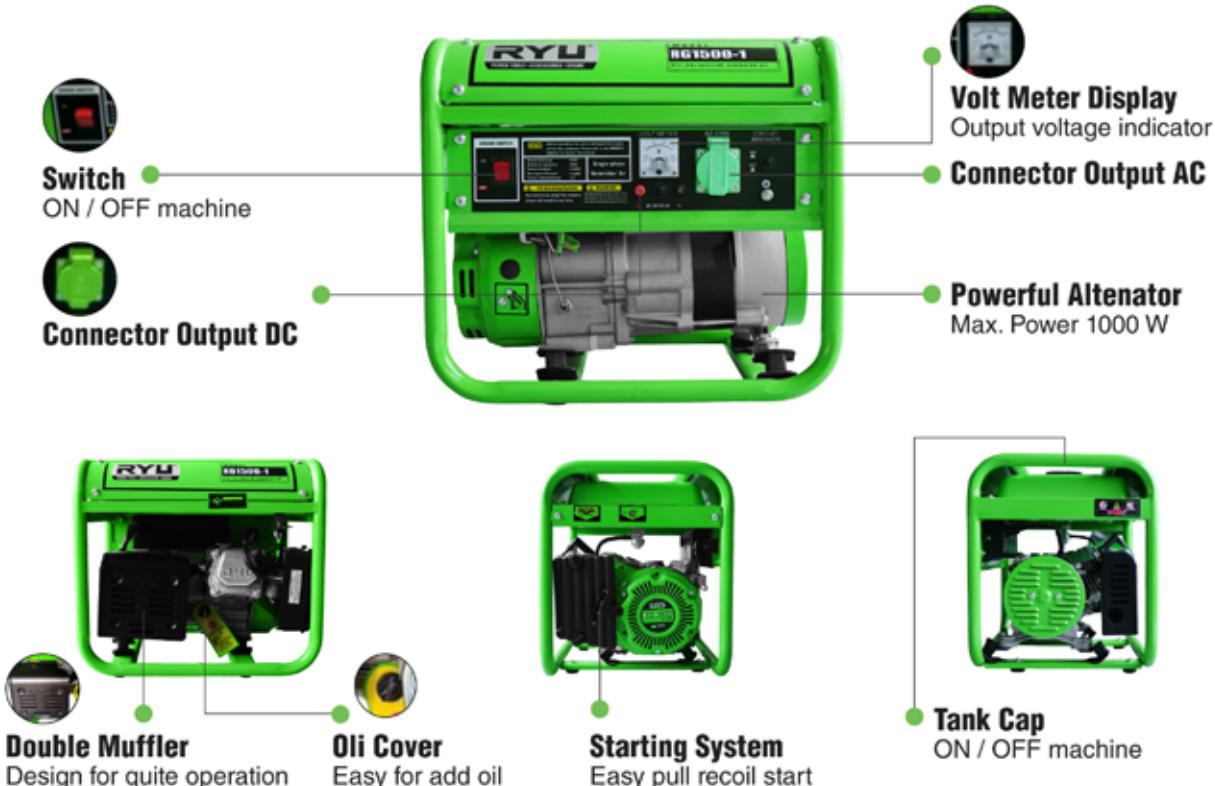

TECHNICAL INFORMATION

RYU (UN) GASOLINE GENERATOR RG1500-1 is a generator that uses gasoline as fuel. Used as a producer of electrical energy to replace cut electrical energy or for an area that has not yet entered electricity. This generator has an average power of 900 watts and a maximum power of 1000 watts. The maximum power can be used as a backup when the electricity demand exceeds the average power. This generator has a fuel capacity of 8 L and an engine oil capacity of 350 ml. With this capacity of fuel and oil, this generator can be operated for a long time, namely 8.5 hours (75% load). With an easy recoil (crank) ignition system, users won't run out of a lot of time and energy just to turn on this generator. The noise level of this generator is 56 decibels, a level that is still comfortable and not too noisy. So that it will not disturb the environment around the user.

Selling Point Information

- Professional Altenator makes output power more strong
- Heavy duty cast iron engine
- Easy pull recoil start
- Double muffler ensures quite operation

SPECIFICATION

Generator

Max Power	: 1000 W
Rated Power	: 900 W
Rated Ampere	: 4.5 A
Rate Power	: 220 V
Voltage	: 50 Hz
DC Output	: 12 V / 8.3 A
Phase	: Single

Engine

Type	: 4 Stroke, OHV, Air Cooled
Engine Model	: NP 1500
Displacement	: 87 cc
Max. Power Output	: 2.8 HP / 3600 RPM
Starting System	: Recoil Starting
Fuel	: Gasoline
Fuel Tank Capacity	: 8 L
Oil Engine Capacity	: 350 ML
Noise Level	: 56 dB
Dimension	: 50 x 39 x 42 CM
Gross Weight	: 28 Kg

Configuration

Automatic Voltage Regulator	: Yes
Fuel Meter	: Yes
Volt Meter	: Yes
Hour Meter	: Yes
2-Wheel Transport Kit	: Yes
Double Receptacle/Plug Female	: Yes
Brush Altenator	: Yes

GANSOLINE GENERATOR SET

**RG1500-1**

- Max Power Output 1000 W
- Displacment 87cc
- Horisontal Shaft 4 Stroke Air Cooled, OHV
- Full Tank 8 Liters
- Recoil Starting
- With AVR

**RG2800-1**

- Max Power Output 2500 W
- Displacment 163cc
- Horisontal Shaft 4 Stroke Air Cooled, OHV
- Full Tank 18 Liters
- Recoil Starting + electric starting
- With AVR

**RG3800-1**

- Max Power Output 2800 W
- Displacment 196cc
- Horisontal Shaft 4 Stroke Air Cooled, OHV
- Full Tank 18 Liters
- Recoil Starting + electric starting
- With AVR

	SPECIFICATION	RG 1500-1	RG 2800-1	RG 3800-1	RG 7800-1	RG 8800-1	RG 9800-1	
G E N E R A T O R	MAX POWER	1.000 W	2.500 W	2.800 W	5.500 W	6.500 W	8.000 W	
	RATED POWER	900 W	2.000 W	2.500 W	5.000 W	6.000 W	7.000 W	
	RATED AMPERE	4,5 A	9,1 A	11,4 A	22,7 A	29,5A	32 A	
	RATED VOLTAGE	220 V						
	FREQUENCY	50 Hz						
	DC OUTPUT	12 V / 8,3 A						
E N G I N E	PHASE	SINGLE						
	TYPE	4 STROKE, OHV SINGLE - CYLINDER GASOLINE ENGINE WITH FORCED AIR COOLED						
	ENGINE MODEL	NP 1500	GX 160	GX 200	GX 390	GX 420	GX 500	
	DISPLACEMENT	87 CC	163 CC	196 CC	389 CC	420 CC	439	
	MAX POWER OUTPUT	2.8 HP/3.600 RPM	5.5 HP/3.600 RPM	6.5 HP/3.600 RPM	13 HP/3.600 RPM	16 HP/3.600 RPM	19HP/3.600 RPM	
	STARTING SYSTEM	RECOIL STARTING	RECOIL STARTING + ELECTRIC STARTING					
	FUEL	GASOLINE						
	FUEL TANK CAPACITY	8 L	18 L	18 L	28 L	28 L	28 L	
	OIL ENGINE CAPACITY	350 ML	600 ML	600 ML	1.100 ML	1.100 ML	1.100 ML	
	NOISE LEVEL	56 dB	68 dB	70 dB	77 dB	77 dB	78 dB	
	DIMENSION	50 x 39 x 42 CM	66 x 50 x 47 CM	66 x 50 x 47 CM	71 x 57 x 63 CM	71 x 57 x 63 CM	71 x 60 x 63 CM	
	GROSS WEIGHT	28 KG	45 KG	48 KG	85 KG	87 KG	92 KG	
C O N F I G U R A T I O N	AUTOMATIC VOLTAGE REGULATOR	✓	✓	✓	✓	✓	✓	
	FUEL METER	✓	✓	✓	✓	✓	✓	
	VOLT METER	✓	✓	✓	✓	✓	✓	
	HOUR METER	✓	✓	✓	✓	✓	✓	
	AMPERE METER	X	✓	✓	✓	✓	✓	
	12 V DC OUTPUT	X	✓	✓	✓	✓	✓	
	2 WHEEL TRANSPORT KIT	✓	✓	✓	✓	✓	✓	
	DOUBLE RECEPTACLE/PLUG FEMALE	✓	✓	✓	✓	✓	✓	
	BRUSH ALTERNATOR	✓	✓	✓	✓	✓	✓	



INCLUDE : User Manual, Warranty Card

**RG7800-1**

- Max Power Output 5500 W
- Displacment 389cc
- Horisontal Shaft 4 Stroke Air Cooled, OHV
- Full Tank 28 Liters
- Recoil Starting + electric starting
- With AVR

**RG8800-1**

- Max Power Output 6500 W
- Displacment 389cc
- Horisontal Shaft 4 Stroke Air Cooled, OHV
- Full Tank 28 Liters
- Recoil Starting + electric starting
- With AVR

**RG9800-1**

- Max Power Output 8000 W
- Displacment 439cc
- Horisontal Shaft 4 Stroke Air Cooled, OHV
- Full Tank 28 Liters
- Recoil Starting + electric starting
- With AVR

WATER PUMP**GREEN20CX / BLACK20CX**

- Max Power Output 5.5 HP/3,600 RPM
- Displacment 163cc
- Horisontal Shaft 4 Stroke Air Cooled, OHV
- Full Tank 3.6 Liters
- Recoil Starting
- Suction Dia 1"
- Discharge Dia 1"

**RS10CX**

- Max Power Output 5.5 HP/6,500 RPM
- Displacment 163cc
- Horisontal Shaft 4 Stroke Air Cooled, OHV
- Full Tank 0.7 Liters
- Recoil Starting
- Suction Dia 1"
- Discharge Dia 1"

GREEN30CX / BLACK30CX

- Max Power Output 5.5 HP/3,600 RPM
- Displacment 196cc
- Horisontal Shaft 4 Stroke Air Cooled, OHV
- Full Tank 3.6 Liters
- Recoil Starting
- Suction Dia 1"
- Discharge Dia 1"

RS40CX

- Max Power Output 5.5 HP/3,600 RPM
- Displacment 389cc
- Horisontal Shaft 4 Stroke Air Cooled, OHV
- Full Tank 6.5 Liters
- Recoil Starting
- Suction Dia 1"
- Discharge Dia 1"

		RS 10 CX	GREEN 20 CX	GREEN 30 CX	RS 40 CX	
SUCTION PORT DIA	mm	25 (1 inch)	50 (2 inch)	80 (3 inch)	100 (4 inch)	
DISCHARGE PORT DIA	mm	25 (1 inch)	50 (2 inch)	80 (3 inch)	100 (4 inch)	
MAX. DISPLACEMENT	m3/h2	83	66	O9	6	
RATED DISPLACEMENT	m3/h1	82	23	66	4	
MAX. HEAD	m1	52	63	O3	1	
SELF-PRIMING TIME	s/4m	-	70	120	180	
MAX. SUCTION HEAD	m1	O8	-	88		
TYPE		2 Stroke	Air Cooled 4 Stroke, OHV Single Cyl, Horisontal Camshaft			
MODEL		TU26	GX 160	GX 200	GX 390	
RATED POWER	HP/ RPM	/6500	5.5/3600	6.5/3600	13/3600	
DISPLACEMENT	L2	6	163	196	389	
FUEL TANK CAPACITY	L	0.7	3.6	3.6	6.5	
STARTING SYSTEM		Recoil				
OIL SPESIFICATION		-	SAE 10W30			
NET WEIGHT	Kg	2.5	24	26	31	
DIMENSION (L X W X H)	Cm	26 x 26 x 19	45 x 38 x 39	51 x 38 x 45	61 x 48 x 54	



INCLUDE : User Manual, Warranty Card

GANSOLINE ENGINE (Green / Black)



	RS 160	RS 200	RS 200 LS				
TYPE	Air Cooled 4 Stroke, OHV Single Cyl, Horizontal Shaft						
MAX POWER / RPM	5.5 / 3600	6.5 / 3600	6.5 / 1800				
BORE X STROKE	68 x 456	8 x 456	8 x 45				
DISPLACEMENT	163	196	196				
COMPRESSION RATIO	8.5 : 1		8.2 : 1				
IGNITION SYSTEM			TCI				
STARTING SYSTEM			RECOIL				
LUBRICATION SYSTEM			SPLASH				
FUEL TANK CAPACITY		3.66					
OIL CAPACITY		600					
AIR CLEANER			Semi - Dry				
DIMENSION	36 x 31 x 33	37 x 31 x 33	39 x 38 x 34				
WEIGHT	15 Kg	16 Kg	18 Kg				
LUBE SPESIFICATION			SAE 10W30				

DESCRIPTION

RS 160

- Max Power Output 5.5 HP / 3,600 Rpm
- Displacment 163cc
- Ignition System Transistor Magneto
- Horisontal Shaft 4 Stroke Air Cooled, OHV Single CYL
- Full Tank 3.6 Liters

RS 200

- Max Power Output 6.5 HP / 3,600 Rpm
- Displacment 196cc
- Ignition System Transistor Magneto
- Horisontal Shaft 4 Stroke Air Cooled, OHV Single CYL
- Full Tank 3.6 Liters

RS 200 LS

- Max Power Output 6.5 HP / 1,800 Rpm
- Displacment 196cc
- Ignition System Transistor Magneto
- Horisontal Shaft 4 Stroke Air Cooled, OHV Single CYL
- Full Tank 3.6 Liters



INCLUDE : User Manual, Warranty Card

	RS 390	RS 390 LS	RS 420	RS 420 LS	RS 460	RS 460 LS	RS 640
TYPE	Air Cooled 4 Stroke, OHV Single Cyl, Horizontal Shaft						
MAX POWER / RPM	13 / 3600	13 / 1800	16 / 3600	16 / 1800	18 / 3600	18 / 1800	18 / 2800
BORE X STROKE	88 x 649		0 x 64		90 x 66		85 x 63
DISPLACEMENT	389		407		459		85 x 63
COMPRESSION RATIO	8.2 : 1						
IGNITION SYSTEM	TCI						
STARTING SYSTEM	RECOIL						
LUBRICATION SYSTEM	SPLASH						
FUEL TANK CAPACITY	6.5						8.7
OIL CAPACITY	1000						
AIR CLEANER	Oil - Bath						
DIMENSION	45 x 41 x 445	3 x 48 x 484	7 x 43 x 47	55 x 51 x 51	58 x 56 x 546	2 x 56 x 54	
WEIGHT	31 Kg	34 Kg	36 Kg	39 Kg	40 Kg	42 Kg	31 Kg
LUBE SPESIFICATION	SAE 10W30						

DESCRIPTION

RS390

- Max Power Output 13 HP / 3,600 Rpm
- Displacment 389cc
- Ignition System Transistor Magneto
- Horisontal Shaft 4 Stroke Air Cooled, OHV Single CYL
- Full Tank 6.5 Liters
- Recoil Starting

RS390LS

- Max Power Output 13 HP / 1,800 Rpm
- Displacment 407cc
- Ignition System Transistor Magneto
- Horisontal Shaft 4 Stroke Air Cooled, OHV Single CYL
- Full Tank 6.5 Liters
- Recoil Starting

RS420

- Max Power Output 16 HP / 3,600 Rpm
- Displacment 407cc
- Ignition System Transistor Magneto
- Horisontal Shaft 4 Stroke Air Cooled, OHV Single CYL
- Full Tank 6.5 Liters
- Recoil Starting

RS420LS

- Max Power Output 18 HP / 1,800 Rpm
- Displacment 407cc
- Ignition System Transistor Magneto
- Horisontal Shaft 4 Stroke Air Cooled, OHV Single CYL
- Full Tank 6.5 Liters
- Recoil Starting

RS460

- Max Power Output 13 HP / 3,600 Rpm
- Displacment 459cc
- Ignition System Transistor Magneto
- Horisontal Shaft 4 Stroke Air Cooled, OHV Single CYL
- Full Tank 6.5 Liters
- Recoil Starting

RS460LS

- Max Power Output 18 HP / 1,800 Rpm
- Displacment 459cc
- Ignition System Transistor Magneto
- Horisontal Shaft 4 Stroke Air Cooled, OHV Single CYL
- Full Tank 6.5 Liters
- Recoil Starting

RS640

- Max Power Output 18 HP / 2,800 Rpm
- Displacment 459cc
- Ignition System Transistor Magneto
- Horisontal Shaft 4 Stroke Air Cooled, OHV Single CYL
- Full Tank 8.7 Liters
- Recoil Starting



INCLUDE : User Manual, Warranty Card



RG1300 GREEN / BLACK 1300 GENERATOR SET



- Max Power Output 1000 W
- 2 Tak Machine
- Full Tank 4 Liters
- Recoil Starting
- With AVR

GENERATOR GREEN / BLACK	
MAX POWER	1.000 Watt
RATED POWER	850 Watt
RATED AMPERE	3.0 A
VOLTAGE	220 Volt
FREQUENCY	50 Hz
DC OUTPUT	12/10 V/A
PHASE	Single Phase
TYPE	2 Stroke Engine
ENGINE MODEL	ET 950
MAX POWER OUTPUT	2.8/3000 HP/RPM
STARTING SYSTEM	Recoil Starting
FUEL	Gasoline + Oil (50:1)
FUEL TANK CAPACITY	4.5 Liter
NOISE LEVEL	63 dB
DIMENSION	38.5 x 32 x 33 CM
GROSS WEIGHT	21 Kg
FUEL METER	✓
VOLTMETER	✓
12 V DC OUTPUT	✓



INCLUDE : User Manual, Warranty Card

RBC2T BRUSH CUTTER 2 TAK



INCLUDE : User Manual, Warranty Card
, Oil Machine, Cover Engine Oil, Air Filter

DESCRIPTION

Material	: Spring Steel
Fuel	: Gasoline 25 L (2-T Oil 1L)
Fuel Capacity	: 1.2 L
Ignition Plug	: BM-7A/CJ6
Weight	: 9.4 kg

Packaging Information

#1 = 40 x 30 x 28cm
#2 = 137 x 7 x 9cm

- Equipped barrier bar for increased stability,
- Chest and back ergonomic harness.
- Air punge system for easy starting.

RPS22 POWER SPAYER 22 L



DESCRIPTION

Model	: RPS22
Pressure	: 22 - 35 kg / cm ²
Speed	: 800 - 1,200 rpm
Suction Ability	: 13 - 22 L / min
Electric Motor	: 1.5 - 2.0 HP
Gasoline Engine	: 3.4 - 4.0 PS
Size	: 37 x 30 x 32 cm
Weight	: 6.5 kg / 7.5 kg

- Professional Treated Materials
- Various Designed Accessories
- Long Life Leakless Pump



INCLUDE : User Manual, Warranty Card

RGS22 GASOLINE CHAIN SAW 22" STEEL ALLOY



DESCRIPTION

Guide Bar	: 22 inch
Max Power	: 1.88 KW / 8,500 rpm
Displacement	: 52 cc
Max. Cutting RPM	: 1,000 rpm
Saw Chain (Pitch X Gauge)	: 0.325 X 0.085
Chain Qty	: 43
Teeth of Spocket	: 7 T
Fuel Mixing Rate	: Gasoline (20:1)
Fue Tank Capacity	: 550 ml
Chain Oil Tank Cpacity	: 260 ml
Chain Oil Supply Sistem	: Automatic
Net Weight	: 6.5 kg
Dimension	: 49 x 26 x 28 cm



INCLUDE : Manual Book, Warranty Card, Key L 2 pcs, Screwdriver (-) 1 pc, Spark Plug Wrench 1 pc, Bottle 1 pc.

- High Performance Engine
- High Quality Saw Chain
- Build With Filtration System
- Automatic Filling Oil
- Comfortable And Safety Design



RYU
450
WATT



INVERTER

RII120-2

INVERTER IGBT 120-2



Selling Point Information

- Small Power
- Can Use a Generator
- Duty Cycle 60%
- Can Weld Argon dan Stainless Steel maximum ampere 200A
- Rated Voltage 180 – 240 V

SAFETY INSTRUCTION



INCLUDE : User Manual, Warranty Card, 1 Pc Brush And Hammer, 1 Pc Welding Mask, Cable Female, Cable Male

TECHNICAL INFORMATION

The RYU (UN) INVERTER RII120-2 is one type of transformer that has advantages in power consumption and good durability, because it has an IGBT system that can save power while providing a stable and durable arc.

You can also use an electric generator because it already has AVR (Automatic voltage regular) Simple shape, easy to carry can be used with 2.0 mm – 3.2 mm wire, Duty cycle: 60% (100A) & 100% (120A) Completeness: mass welding pliers, hammer welding masks weld.

SPECIFICATION

Rate Input Power	: 450 W
Rate Voltage	: 220 V±15%V
Frequency	: 50/60 Hz
Input Capacity	: 3.4 KVA
Output Current	: 15.5 A
Output Voltage	: 24.4 V
Current Range	: 20 – 120 A
Weight	: 3.85 kg
Packaging Information	
Case Qty	: 4pcs/ctn
G.W/N.W	: 16.6 Kg/15.0 kg
Packaging Size	: 39.5 cm x 31.5 cm x 45 cm

RII120-1 WELDING MACHINE IGBT120-1



INCLUDE : User Manual, Warranty Card, 1 Pc Brush And Hammer, 1 Pc Welding Mask, Cable Female, Cable Male

SPECIFICATION

Rate Input Power	: 900 W
Rate Input Voltage	: 220V±15%
Frequency	: 50/60 Hz
Input Capacity	: 5.0 Kva
Duty Cycle	: 60% 40°C
Current Range	: 20 – 120 A
Efficiency	: 85%
Usable Electrode	: 1.6 – 3.2 mm
No-load Voltage	: 62V
Weight	: 4.1 kg

Packaging Information

Case Qty	: 4 pcs/ctn
G.W/N.W	: 18 Kg/18 kg
Packaging Size	: 42,5 cm x 36,5 cm x 49,5 cm

- Small Power
- Can Use a Generator
- Duty Cycle 60%
- Can Weld Argon dan Stainless Steel maximum ampere 200A
- Rated Voltage 180 – 240 V

RII160-1 WELDING MACHINE IGBT 160-1



INCLUDE : User Manual, Warranty Card, 1 Pc Brush And Hammer, 1 Pc Welding Mask, Cable Female, Cable Male

SPECIFICATION

Rate Input Power	: 1300 W
Rate Input Voltage	: 220V±15%
Frequency	: 50/60 Hz
Input Capacity	: 5.0 Kva
Duty Cycle	: 60% 40°C
Current Range	: 20 – 160 A
Efficiency	: 85%
Usable Electrode	: 1.6 – 4 mm
No-load Voltage	: 62V
Weight	: 5.6 kg

Packaging Information

Case Qty	: 2 pcs/ctn
G.W/N.W	: 11,3 Kg/10,4 kg
Packaging Size	: 46,5 cm x 37,5 cm x 30,5 cm

- Small Power
- Can Use a Generator
- Duty Cycle 60%
- Can Weld Argon dan Stainless Steel maximum ampere 200A
- Rated Voltage 180 – 240 V

RII200-1 WELDING MACHINE IGBT 200-1



SPECIFICATION

Rate Input Power	: 1800 W
Rate Input Voltage	: 220V±15%
Frequency	: 50/60 Hz
Input Capacity	: 5.0 Kva
Duty Cycle	: 60% 40°C
Current Range	: 20 – 200 A
Efficiency	: 85%
Usable Electrode	: 1.6 – 4 mm
No-load Voltage	: 62 V
Weight	: 2.8 kg

Packaging Information

Case Qty	: 2 pcs/ctn
G.W/N.W	: 12,4 Kg/7,9 kg
Packaging Size	: 46,5 cm x 39 cm x 30 cm

- Small Power
- Can Use a Generator
- Duty Cycle 60%
- Can Weld Argon dan Stainless Steel maximum ampere 200A
- Rated Voltage 180 – 240 V

INCLUDE : User Manual, Warranty Card, 1 Pc Brush And Hammer, 1 Pc Welding Mask, Cable Female, Cable Male

RII400 WELDING MACHINE 400 A



SPECIFICATION

Input Power Source	: 3 Phase
Input Voltage	: 380 V
Frequency	: 50/60 Hz
Duty Cycle	: 60% 40°C
Output Current	: 20 – 40 A
Current Range	: 20 – 400 A
Efficiency	: 85%
Usable Electrode	: 1.6 – 4 mm
Weight	: 22.4 kg

Packaging Information

Case Qty	: 1 pcs/ctn
G.W/N.W	: 22.4 Kg/21.4 kg
Packaging Size	: 60 cm x 36 cm x 48.5 cm

- Maximum Ampere 400A
- 380V Input Voltage Rate ± 15%
- ARC - Force for Anti Sticking
- VRD function, safe for welder
- Dust-free Cooling System with increased duty cycle
- Leading edge single IGBT technology

INCLUDE : User Manual, Warranty Card, 1 Pc Brush And Hammer, 1 Pc Welding Mask, Cable Female, Cable Male



RIM135

WELDING MACHINE MIG

MMA 135 A



WARRANTY
ONE YEAR



INCLUDE : User Manual, Warranty Card, 1 Pc Brush And Hammer,
1 Pc Welding Mask, Cable Female, Cable Male

SPECIFICATION

Input Power Source	: 3 Phase
Input Voltage	: 380 V
Frequency	: 50/60 Hz
Duty Cycle	: 60% 40°C
Output Current	: 20 – 40 A
Current Range	: 20 – 400 A
Efficiency	: 85%
Usable Electrode	: 1.6 – 4 mm
Weight	: 22.4 kg

Packaging Information

Case Qty	: 1 pcs/ctn
G.W/N.W	: 22.4 Kg/21.4 kg
Packaging Size	: 60 cm x 36 cm x 48.5 cm

- Maximum Ampere 400A
- 380V Input Voltage Rate \pm 15%
- ARC - Force for Anti Sticking
- VRD function, safe for welder
- Dust-free Cooling System with increased duty cycle
- Leading edge single IGBT technology



SPAREPART

ARMATURE




SPECIFICATION


1. Length	: 150 mm
2. Diameter	: 22 mm
3. Diameter	: 32 mm
4. Diameter	: 59 mm
5. Diameter	: 26 mm
Weight	: 0.36 kg

Packaging Information

Case Qty	: 45 pcs/ctn
G.W/N.W	: 16.1 Kg/16.6 kg
Packaging Size	: 53 cm x 32 cm x 19 cm

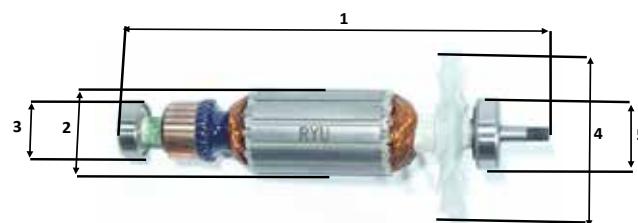

CARBON BRUSH

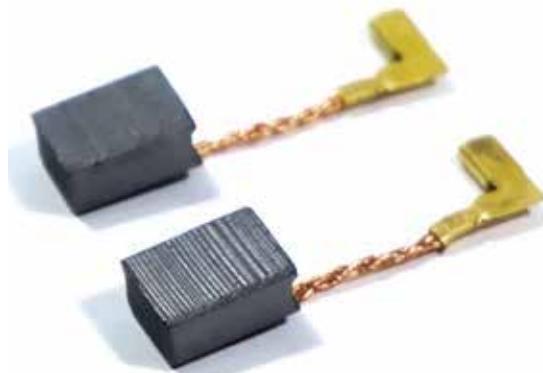


SPECIFICATION

1. Length	: 12 mm
2. Length	: 9 mm
3. Diameter	: 37 mm
4. Width	: 6 mm
Weight	: 0.01 kg

Packaging Information

Case Qty	: 1.200 pcs/ctn
G.W/N.W	: 7.5 Kg/8 kg
Packaging Size	: 62 cm x 34 cm x 29 cm

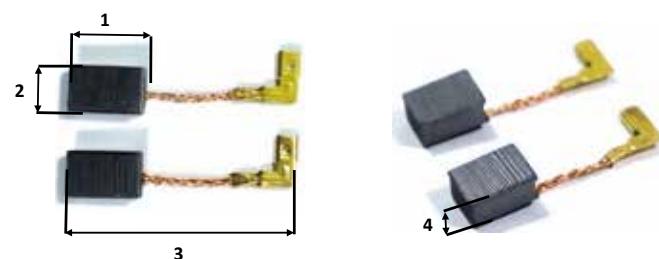

GEAR



SPECIFICATION

1. Outside Diameter	: 45 mm \pm 0.1
2. Inside Diameter	: 12 mm \pm 0.1
3. Diameter Pinion	: 6.5 mm \pm 0.1
4. Qty Teeth Gear	: 37 Pcs

Packaging Information

Case Qty	: 200 pcs/ctn
G.W/N.W	: 174 Kg/16.9 kg
Packaging Size	: 62 cm x 23 cm x 14 cm



STATOR




SPECIFICATION

1. Length	: 75 mm
2. Length	: 45 mm
3. Diameter	: 55 mm
Weight	: 0.41 kg

Packaging Information

Case Qty	: 50 pcs/ctn
G.W/N.W	: 20.4 Kg/20.9 kg
Packaging Size	: 34.5 cm x 34.5 cm x 19 cm

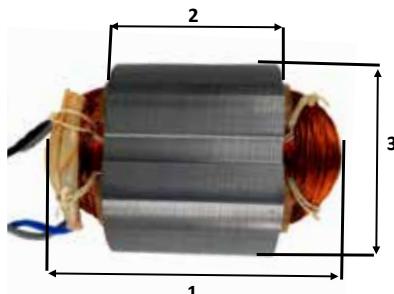

SWITCH




SPECIFICATION

1. Length	: 23 mm
2. Width	: 14 mm
3. Height	: 19 mm
4. Diameter	: 12 mm
5. Height	: 23 mm
Weight	: 1.78 kg

Packaging Information

Case Qty	: 1.200 pcs/ctn
G.W/N.W	: 18.1 Kg/18.6 kg
Packaging Size	: 62 cm x 34 cm x 29 cm

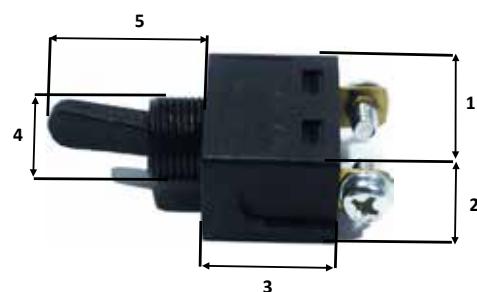

BATTERY CORDLESS



SPECIFICATION

Voltage	: 12 V
Capacity	: 1500 mAh
Length	: 9.20 cm
Width	: 5.80 cm
Height	: 5.80
Weight	: 0.18 kg

Packaging Information

Case Qty	: 100 pcs/ctn
G.W/N.W	: 18.2 Kg/18.2 kg
Packaging Size	: 57 cm x 19 cm x 29.5 cm

www.ryupowertools.com