


VERSION HISTORY

Index:

- P01 VERSION HISTORY
- P02 BLOCK DIAGRAM
- P03 POWER TREE
- P04 GPIO ASSIGNMENT
- P05 PMIC
- P06 SOC-SYS
- P07 SOC-GPIO
- P08 LPDDR3
- P09 FLASH
- P10 AUDIO
- P11 USB/T-CARD
- P12 CAMREA
- P13 LCM
- P14 CTP
- P15 KEY/DEBUG
- P16 WIFI+BT
- P17 SENSOR


Revision	Description	Date	Drawn	Checked	Approved
Ver 1.0	Release version	2020-03-12			
Ver 1.1	1.P03 page , Instructions for modifying Power Tree. 2.Update A100 symbol,and modify A100 description as A100_A133. 3.P10 page, Modify the group value of power amplifier feedback resistors R22 and R24 to 100K. 4.P13 page ,Modify R53 resistance value to 1.8K. 5.Delete AC101 design,and delet R97/R108. 6.Delete the description of the camera module about the I2C design.	2020-06-28			

BLOCK

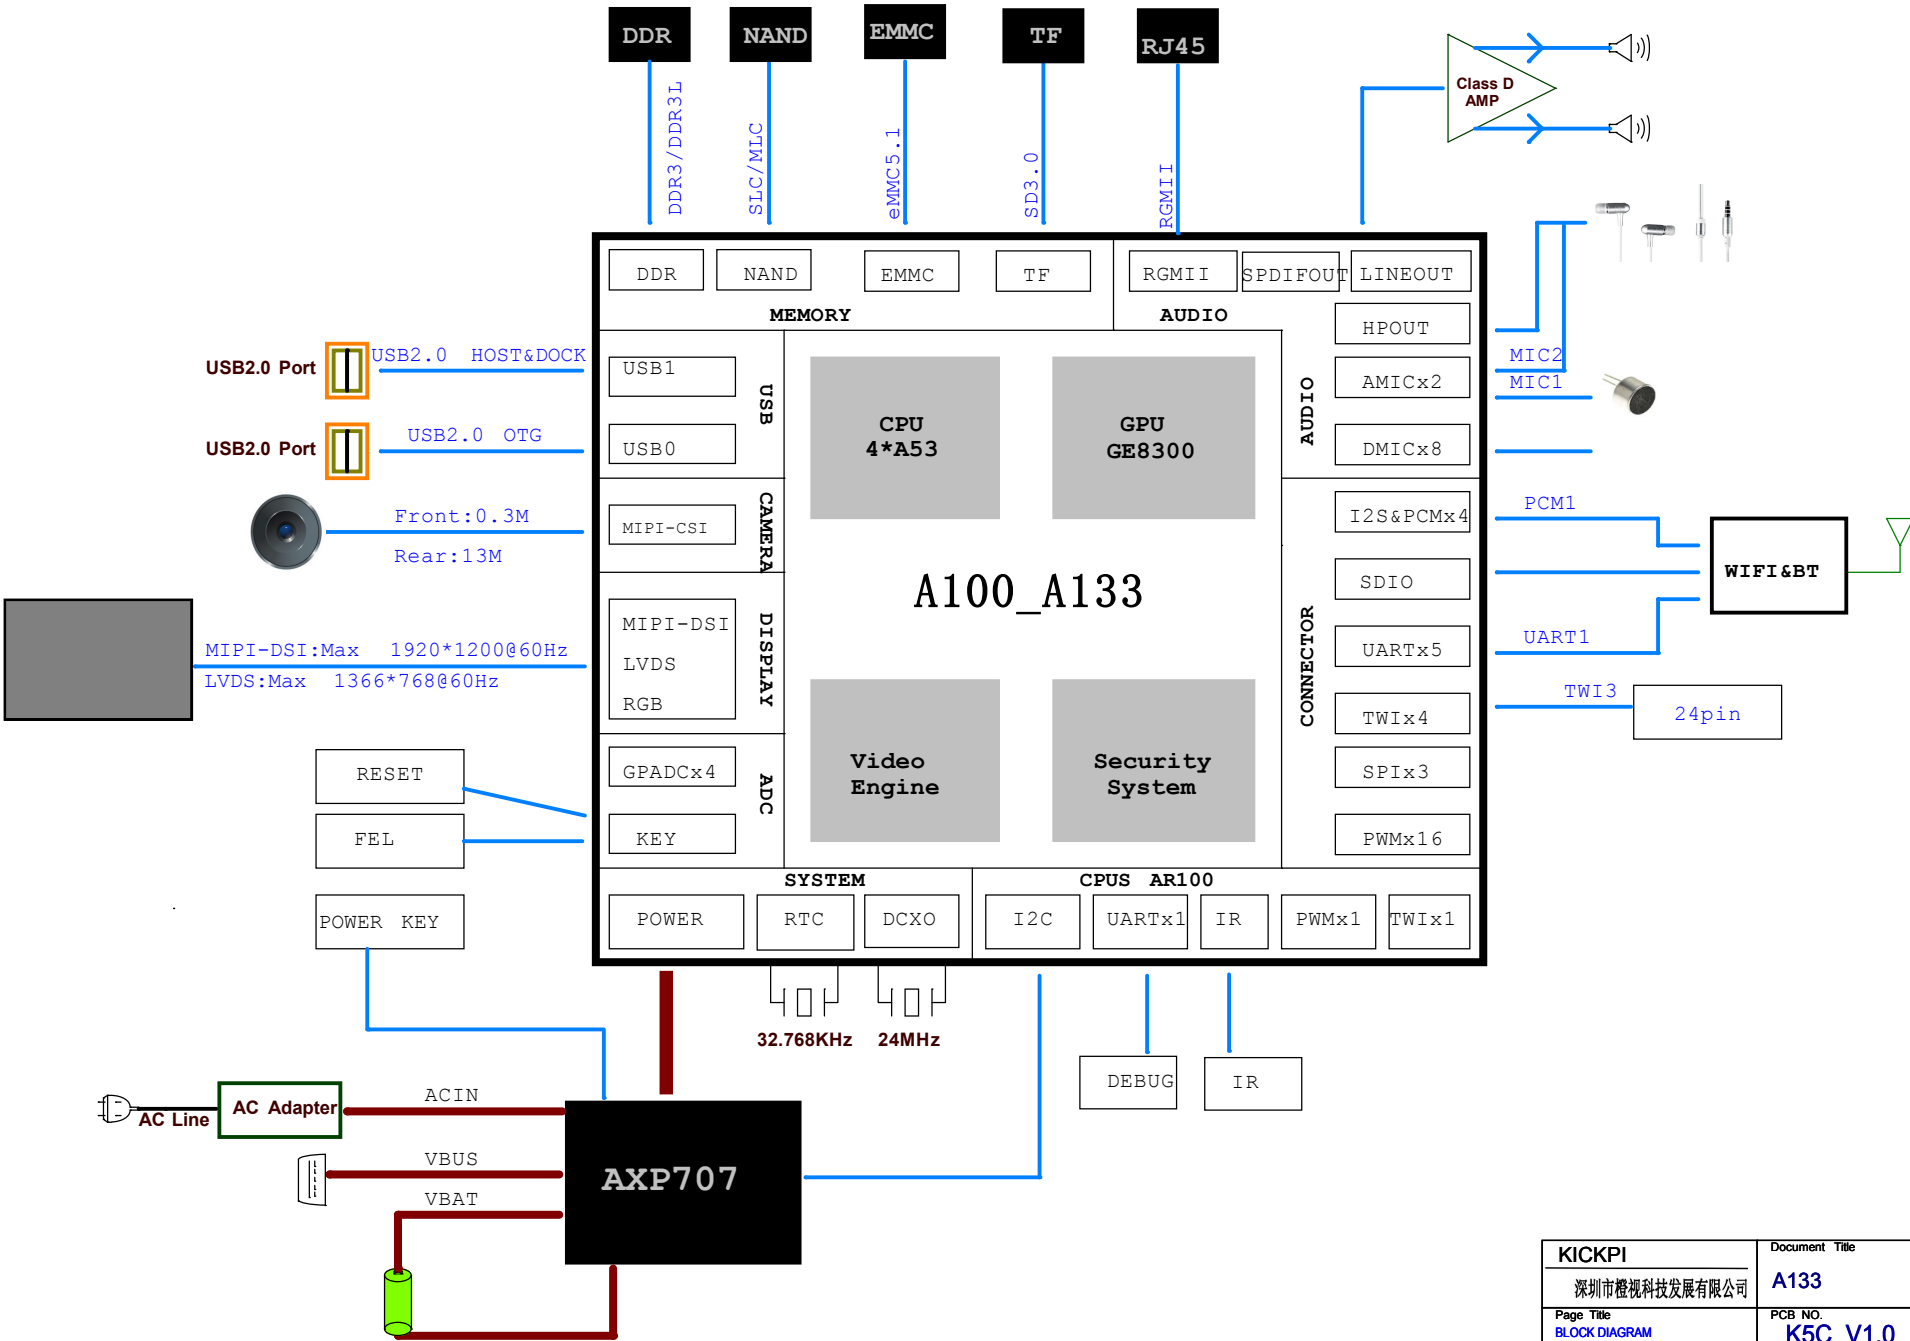

KICKPI		Document Title	
深圳市橙视科技发展有限公司		A133	
Page Title BLOCK DIAGRAM		PCB NO. K5C_V1.0	
Page Size A3	Sch Designer TIM	Pcb Designer TIM	Project Stage V10
Date: Wednesday, November 27, 2024		Sheet 2 of 21	

☐ DEFAULT POWER ON
☐ DEFAULT POWER OFF

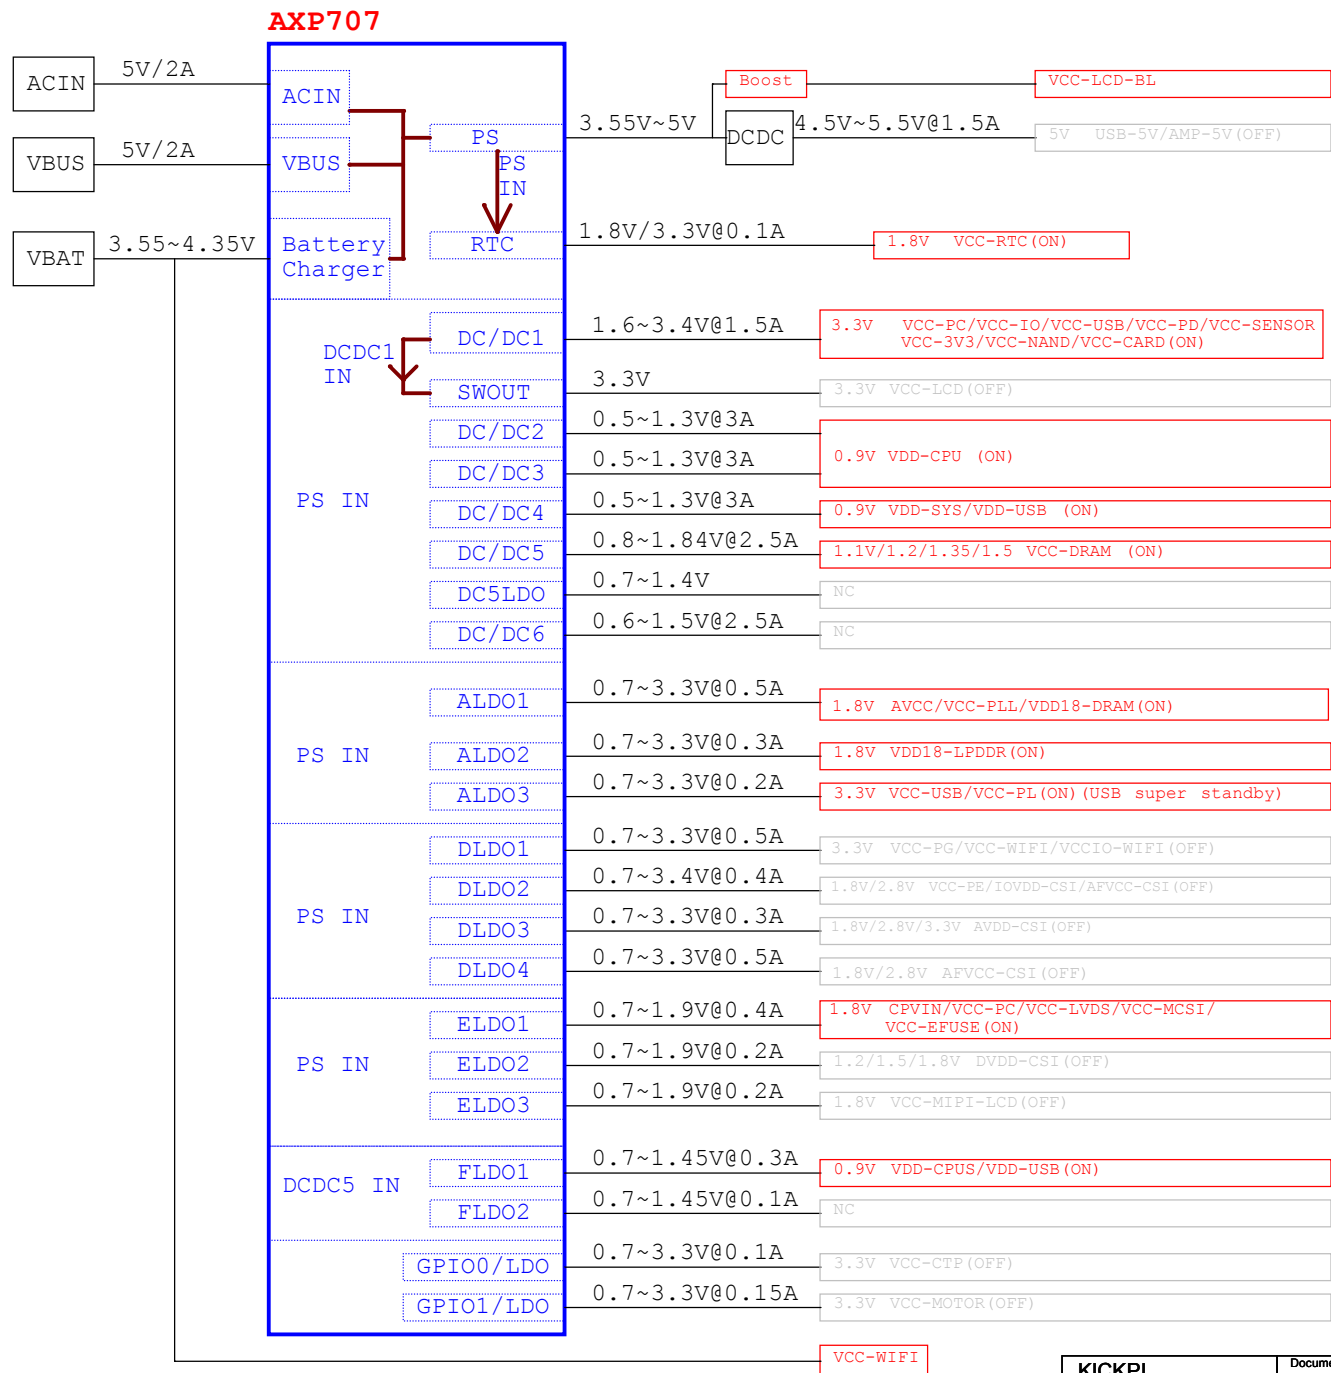

KICKPI		Document Title	
深圳市睿视科技发展有限公司		A133	
Page Title		PCB NO.	
POWER TREE		K5C V1.0	
Page Size	Sch Designer	Pcb Designer	Project Stage
A3	TIM	TIM	V10
Date: Wednesday, November 27, 2024		Sheet	3 of 21

GPIO ASSIGNMENT

PIN	Define	CFG	Function
PB0	CPUX_TMS	4	DEBUG
PB1	CPUX_TCK	4	
PB2	CPUX_TDO	4	
PB3	CPUX_TDI	4	
PB4		3	GPIO
PB5		3	
PB6		3	
PB7		3	
PB8	LCD-BL-EN	3	DEBUG
PB9	CPUX_TX	2	
PB10	CPUX_RX	2	

PIN	Define	CFG	Function
PE0	MCSI_MCLK	2	CSI
PE1	MCSI_SCK	2	
PE2	MCSI_SDA	2	
PE3			
PE4			
PE5			
PE6	MCSIB_STBY_F	1	
PE7	MCSIB_RST_F	1	
PE8	MCSIA_STBY_R	1	
PE9	MCSIA_RST_R	1	

PIN	Define	CFG	Function
PH0	TWI0_SCK	2	TWI
PH1	TWI0_SDA	2	
PH2	TWI1_SCK	2	
PH3	TWI1_SDA	2	
PH4	PS-EINT	1	GPIO
PH5			
PH6	PA_SHDN	0	
PH7			
PH8	USB0_ID_SOC	0	
PH9	CTP_INT	0	
PH10	CTP_RST	1	
PH11	GS-INT	0	
PH12			
PH13			
PH14			
PH15			
PH16			
PH17			
PH18			
PH19			

PIN	Define	CFG	Function
PC0	NAND_WE/SDC2_DS	2/3	NAND/eMMC
PC1	NAND_ALE/SDC2_RST	2/3	
PC2	NAND_CLE	2	
PC3	NAND_CE1	2	
PC4	NAND_CE0	2	
PC5	NAND_RE/SDC2_CLK	2/3	
PC6	NAND_RB0/SDC2_CMD	2/3	
PC7	NAND_RB1	2	
PC8	NAND_DQ7/SDC2_D3	2/3	
PC9	NAND_DQ6/SDC2_D4	2/3	
PC10	NAND_DQ5/SDC2_D0	2/3	
PC11	NAND_DQ4/SDC2_D5	2/3	
PC12	NAND_DQS	2	
PC13	NAND_DQ3/SDC2_D1	2/3	
PC14	NAND_DQ2/SDC2_D6	2/3	
PC15	NAND_DQ1/SDC2_D2	2/3	
PC16	NAND_DQ0/SDC2_D7	2/3	


PIN	Define	CFG	Function
PF0	SDC0_D1	2	CARD
PF1	SDC0_D0	2	
PF2	SDC0_CLK	2	
PF3	SDC0_CMD	2	
PF4	SDC0_D3	2	
PF5	SDC0_D2	2	
PF6	SDC0_DET	0	

PIN	Define	CFG	Function
PL0	PMU_SCK	2	CPUS
PL1	PMU_SDA	2	
PL2	BT_RST_N	1	
PL3	BT_WAKE_AP	0	
PL4	AP_WAKE_BT	1	
PL5	WL_PMU_EN	1	
PL6	WL_WAKE_AP	0	
PL7	CPUS-TDI	2	
PL8	USB1-DRVVBUS	1	
PL9	EINT-HAL	0	
PL10	KD-EINT	0	
PL11	LED-EN	1	


PIN	Define	CFG	Function
PD0	LCD_D2	2	LCD
PD1	LCD_D3	2	
PD2	LCD_D4	2	
PD3	LCD_D5	2	
PD4	LCD_D6	2	
PD5	LCD_D7	2	
PD6	LCD_D10	2	
PD7	LCD_D11	2	
PD8	LCD_D12	2	
PD9	LCD_D13	2	
PD10			
PD11			
PD12			
PD13			
PD14			
PD15			
PD16			
PD17			
PD18			
PD19			
PD20			
PD21			
PD22	LCD_RST	1	
PD23	LCD_PWM	3	

PIN	Define	CFG	Function
PG0	WL_SDIO_CLK	2	WIFI/BT
PG1	WL_SDIO_CMD	2	
PG2	WL_SDIO_D0	2	
PG3	WL_SDIO_D1	2	
PG4	WL_SDIO_D2	2	
PG5	WL_SDIO_D3	2	
PG6	BT_UART_RX	2	
PG7	BT_UART_TX	2	
PG8	BT_UART_CTS	2	
PG9	BT_UART_RTS	2	
PG10	BT_PCM_CLK	3	
PG11	BT_PCM_SYNC	3	
PG12	BT_PCM_DIN	3	
PG13	BT_PCM_DOUT	3	


BAT

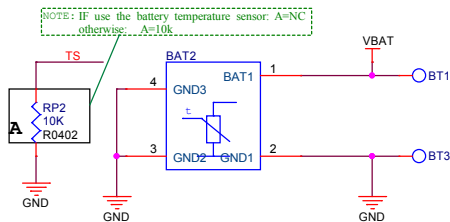

5V-VBUS

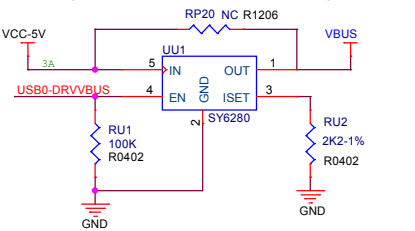

PS-5V

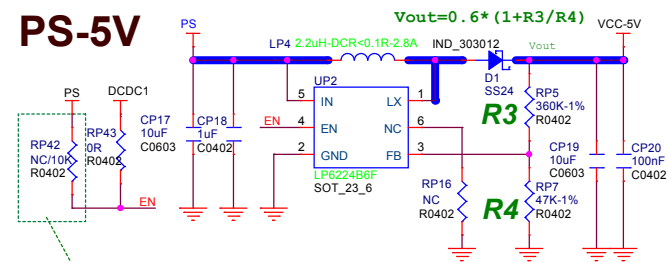


PMIC



NOTE:
Q1 vth <1.5V & R <30mohm @vgs=4.5V

P-MOSFET Option:
1.WPM1481
2.ACE5801




If charging use BCL1.2 mount RP8/RP9, else NC them. R8 and R9 must be placed at the bifurcation point.

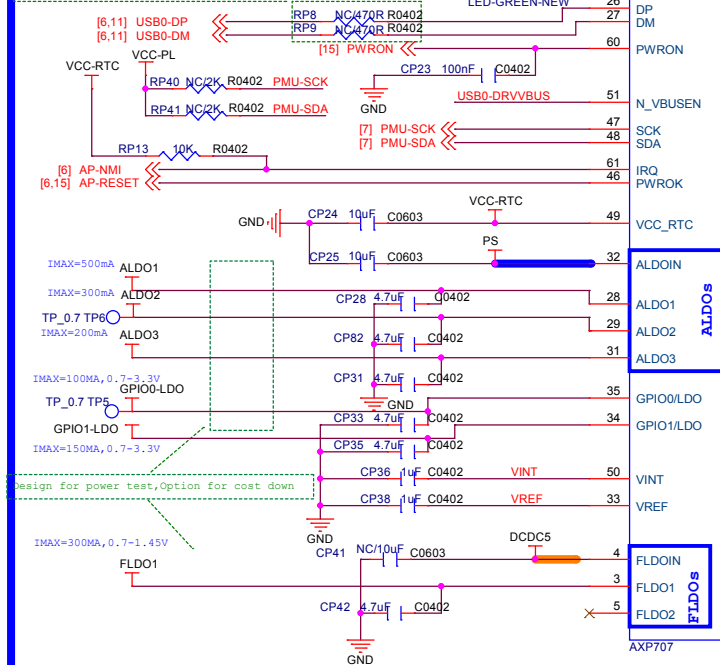


ACIN

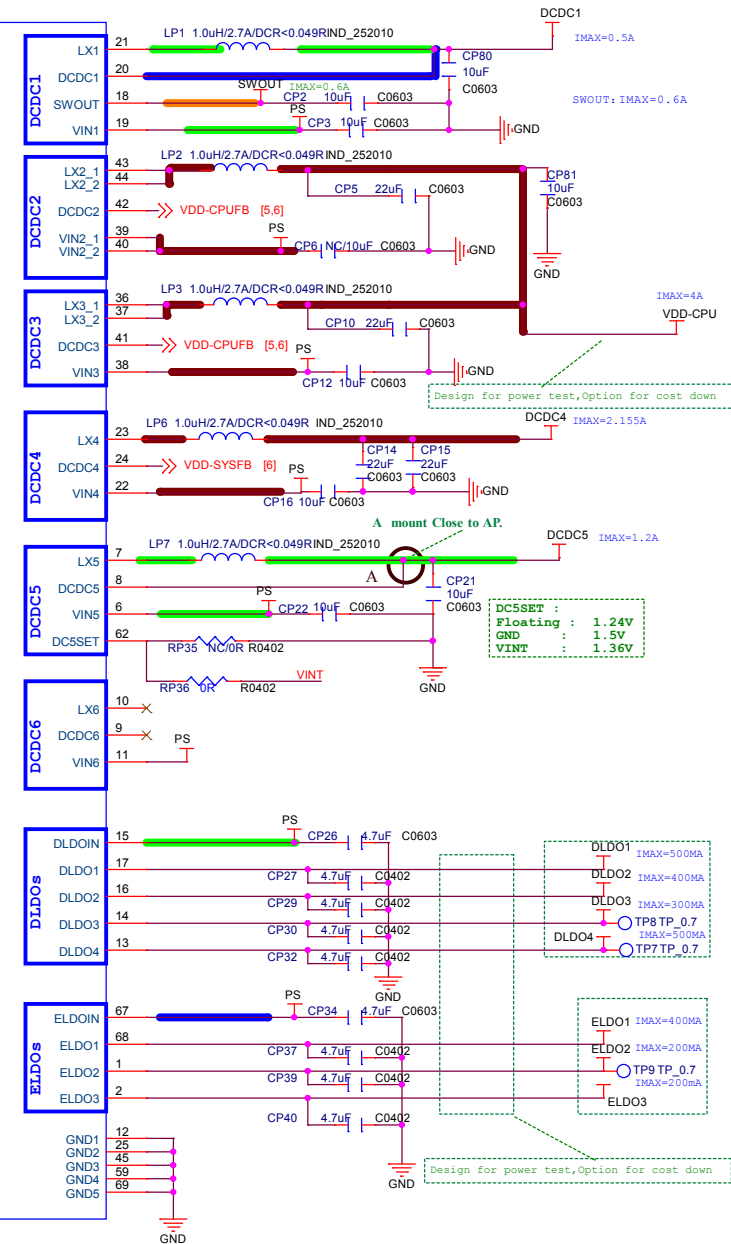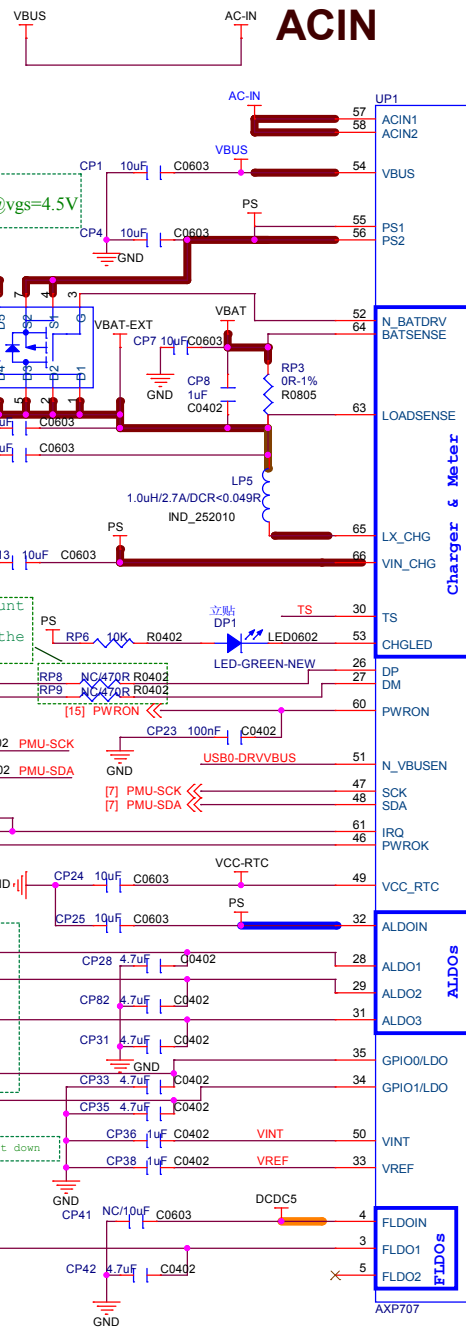








KICKPI		Document Title	
深圳市橙视科技发展有限公司		A133	
Page Title	AXP707	PCB NO.	K5C V1.0
Page Size	A3	Sch Designer	TIM
		Pcb Designer	TIM
		Project Stage	V10
Date: Wednesday, November 27, 2024		Sheet 5 of 21	

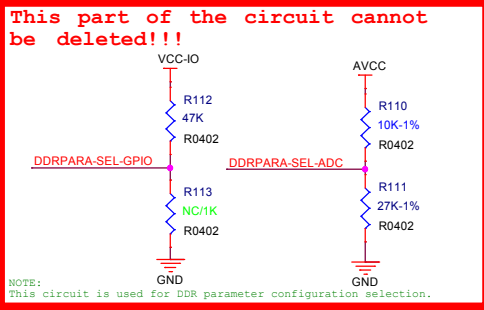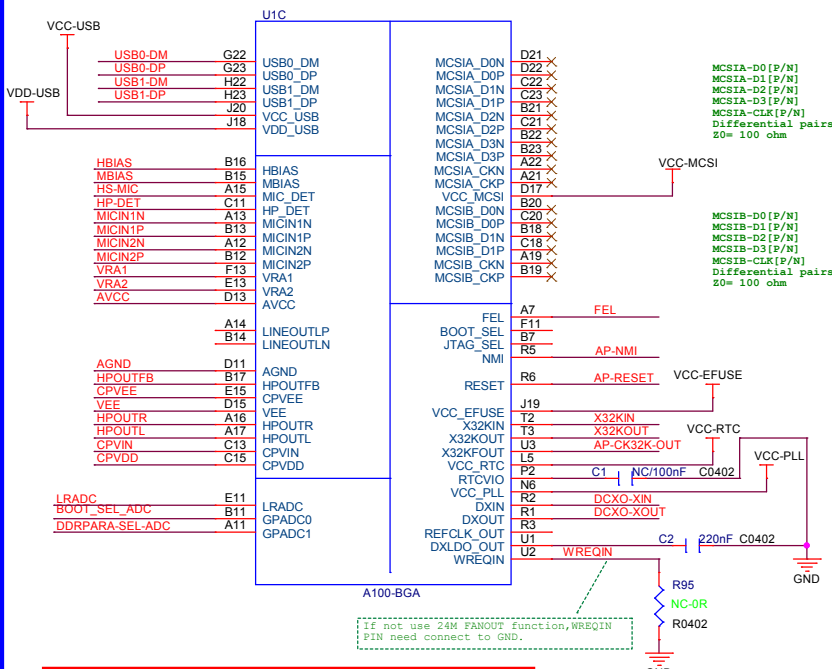



GPIO Level (Set by the R112 pull-up and R113 pull-down resistance of PH17 GPIO)	GPADC Voltage (Fixed pull-up R110 is 10K-1%, Set the voltage by adjusting pull-down resistor R111)	DDR PARA
0	163mV (1K-1%)	DDR PARA 1
0	382mV (2.7K-1%)	DDR PARA 2
0	608mV (5.1K-1%)	DDR PARA 3
0	811mV (8.2K-1%)	DDR PARA 4
0	1050mV (14K-1%)	DDR PARA 5
0	1315mV (27K-1%)	DDR PARA 6
0	1569mV (68K-1%)	DDR PARA 7
0	1800mV (NC)	DDR PARA 8
1	163mV (1K-1%)	DDR PARA 9
1	382mV (2.7K-1%)	DDR PARA 10
1	608mV (5.1K-1%)	DDR PARA 11
1	811mV (8.2K-1%)	DDR PARA 12
1	1050mV (14K-1%)	DDR PARA 13
1	1315mV (27K-1%)	DDR PARA 14
1	1569mV (68K-1%)	DDR PARA 15
1	1800mV (NC)	DDR PARA 16




NO.	R1	R2	Boot Select type
1	NC	10K	SMHC0->MLC NAND->SLC NAND
2	10K	1K	SMHC0->SLC NAND->MLC NAND
3	10K	2K2	SMHC0->EMMC_BOOT->EMMC_USER
4	10K	3K9	SMHC0->EMMC_USER->EMMC_BOOT
5	6K8	4K7	SMHC0->SPI NOR
6	6K8	6K8	SMHC0->SPI NAND

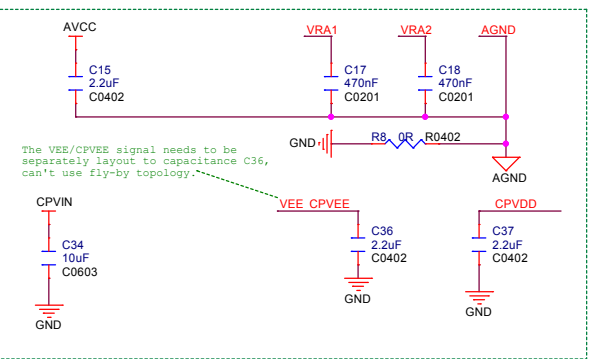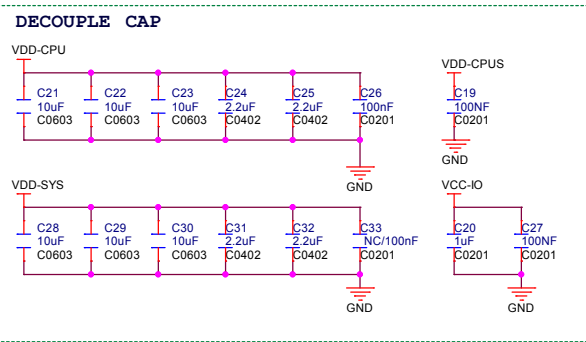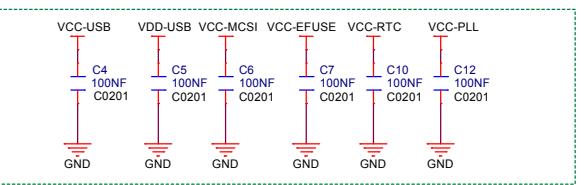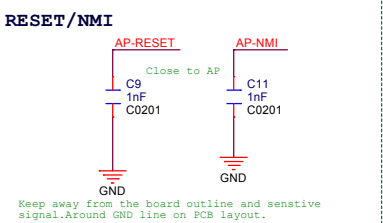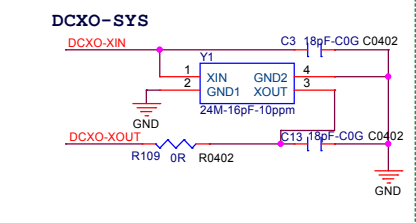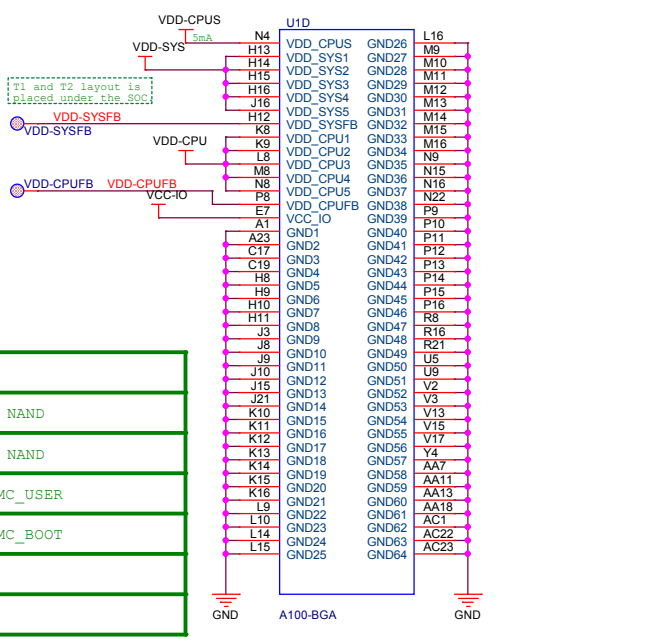


KICKPI		Document Title	
深圳市橙视科技发展有限公司		A133	
Page Title	SOC-SYS	PCB NO.	K5C V1.0
Page Size	A3	Pcb Designer	TIM
Sch Designer	TIM	Project Stage	V10
Date:	Wednesday, November 27, 2024	Sheet	6 of 21

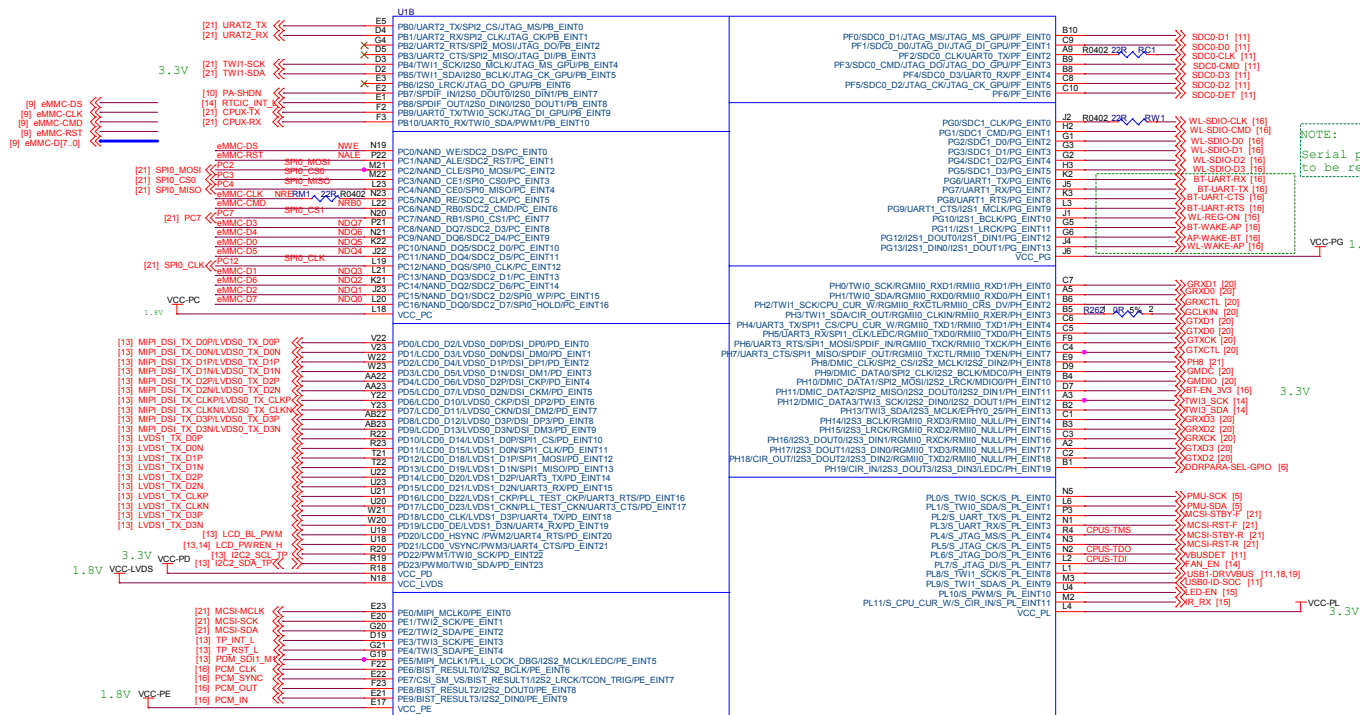


A100-BGA





DDR3 16x2/8x4

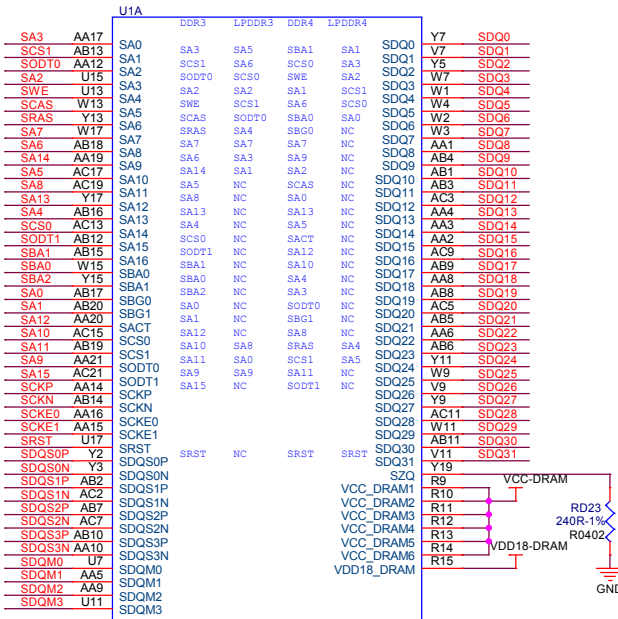



A100-BGA

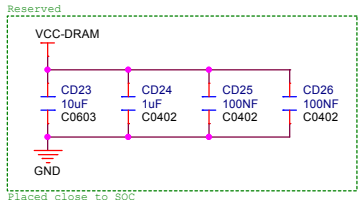


Placed close to SOC

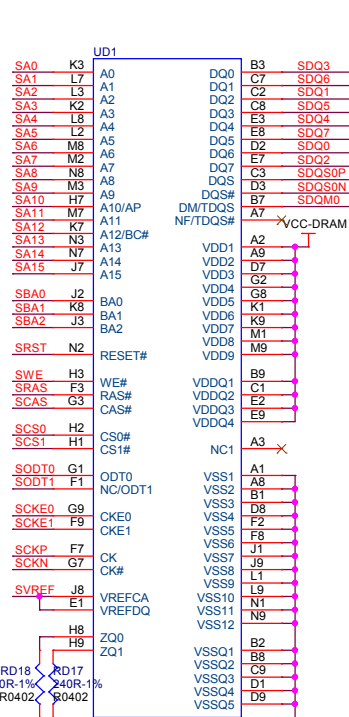



DDR3x8





close to DQ/DM fork
16X2 DDR3:mounting
8X4 DDR3:NC

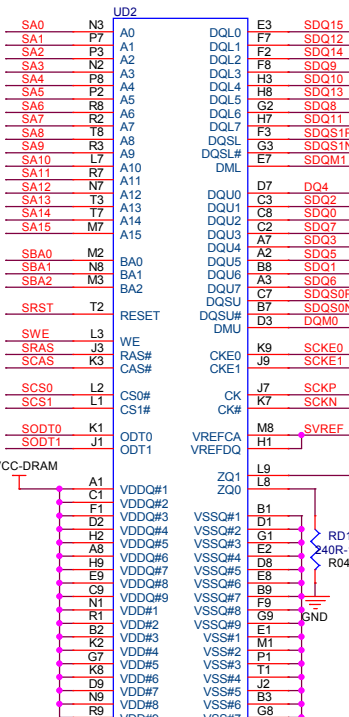



DDR3x16




close to DQ/DM fork
16X2 DDR3:mounting
8X4 DDR3:NC

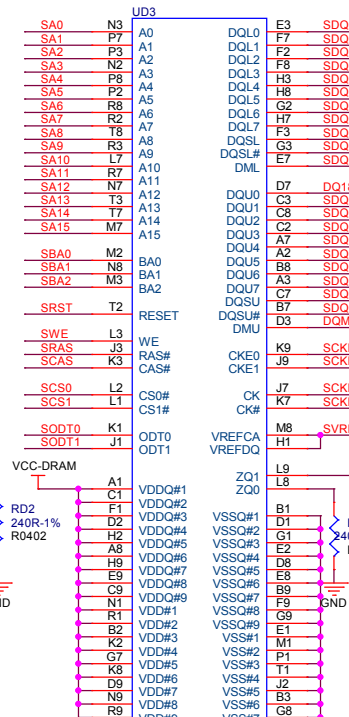



DDR3x16



close to DQ/DM fork
16X2 DDR3:mounting
8X4 DDR3:NC

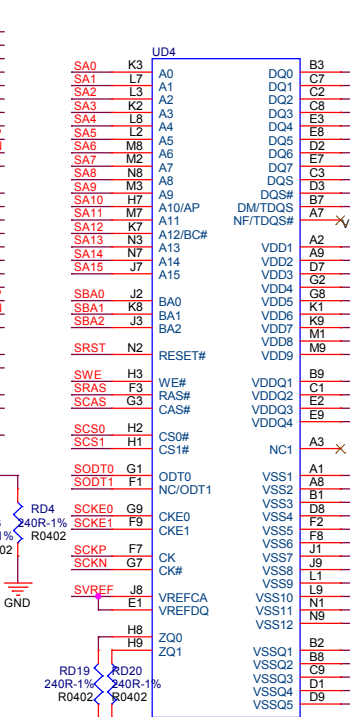

DDR3x8

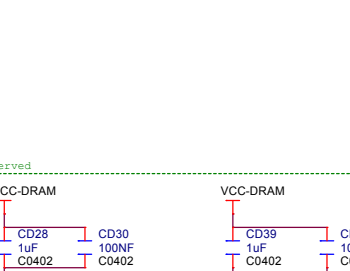



close to DQ/DM fork
16X2 DDR3:mounting
8X4 DDR3:NC





KICKPI		Document Title	
深圳市楷视科技发展有限公司		A133	
Page Title	DDR3-4X8	PCB NO.	K5C V1.0
Page Size	A3	Sch Designer	TIM
		Pcb Designer	TIM
		Project Stage	V10
Date: Wednesday, November 27, 2024		Sheet	8 of 21

[7] eMMC-DS
[7] eMMC-CLK
[7] eMMC-CMD
[7] eMMC-RST
[7] eMMC-D[7..0]


VCC-NAND
50mA
VCC-PC
100mA

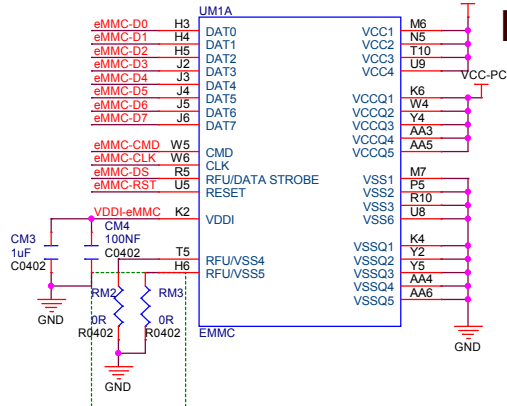

EMMC




NOTE: eMMC-RST and eMMC-CMD signals are internally pulled up in the SOC, RM10 and RM11 can cost down.




NOTE: eMMC-DS signals are internally pulled down in the SOC, RM12 can cost down.

KICKPI		Document Title	
深圳市橙视科技发展有限公司		A133	
Page Title EMMC		PCB NO. K5C V1.0	
Page Size A3	Sch Designer TIM	Pcb Designer TIM	Project Stage V10
Date: Wednesday, November 27, 2024		Sheet 9 of 21	


Headphone

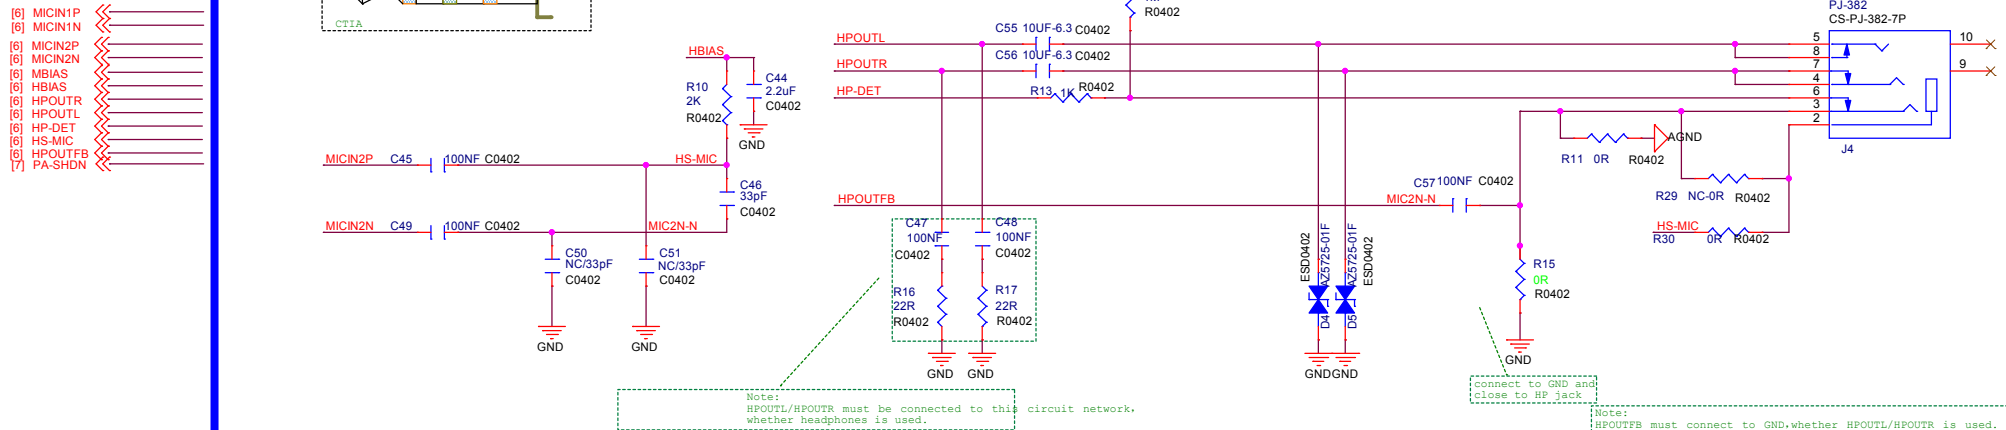

SPEAKER Default:R-OUT,SINGLE,SPEAKER

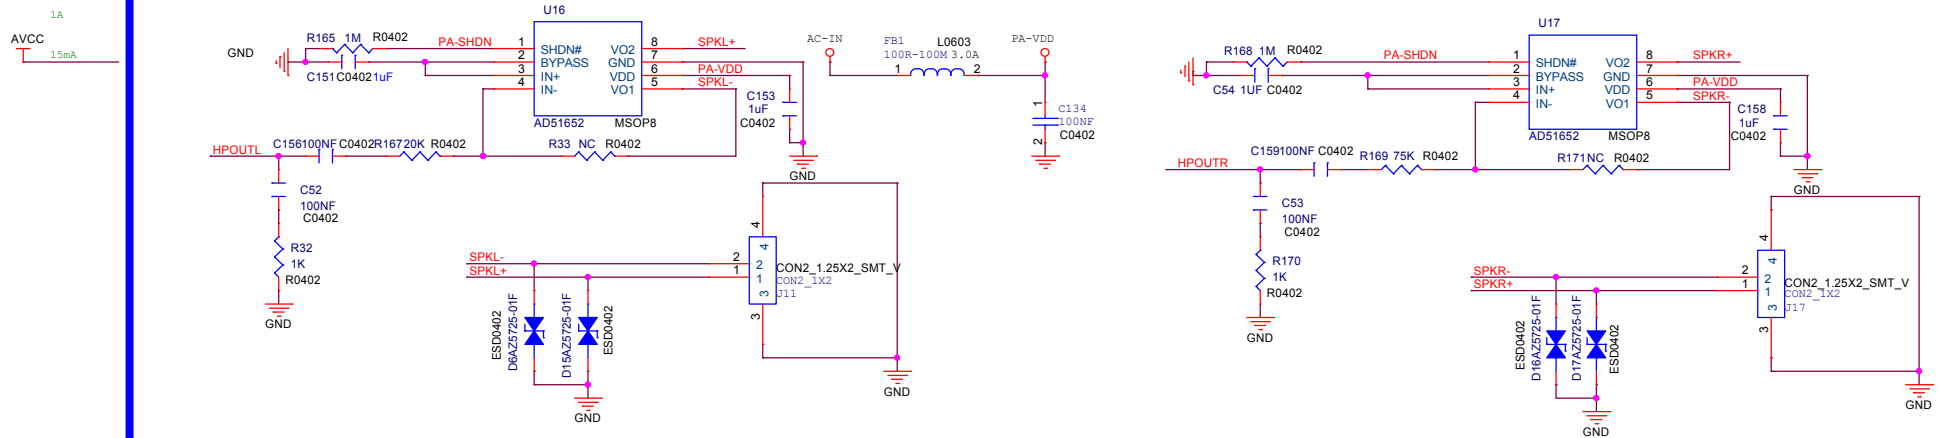

MIC

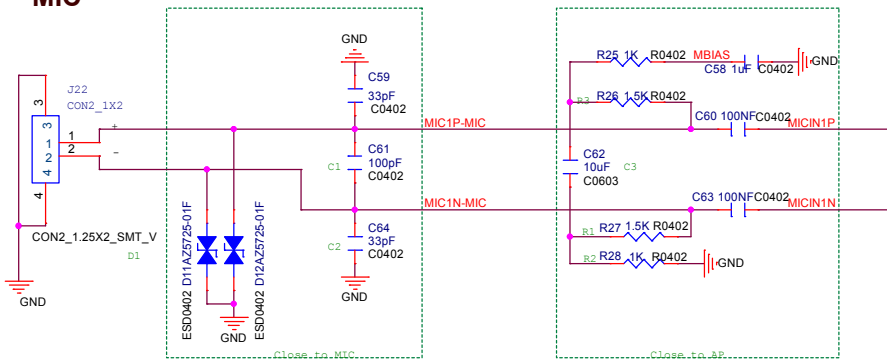

Component	Diferential	single-ended
R1 R2 C1 C3 D1	USE	NC
C2	33pF	0R
R3	1.5K	1K

KICKPI		Document Title	
深圳市橙视科技发展有限公司		A133	
Page Title	AUDIO-MIC	PCB NO.	K5C V1.0
Page Size	A3	Pcb Designer	TIM
Sch Designer	TIM	Project Stage	V10
Date: Wednesday, November 27, 2024		Sheet	10 of 21

[7] SDC0-D1

[7] SDC0-D0


[7] SDC0-CLK

[7] SDC0-CMD

[7] SDC0-D3



[7] SDC0-D2

[7] SDC0-DET




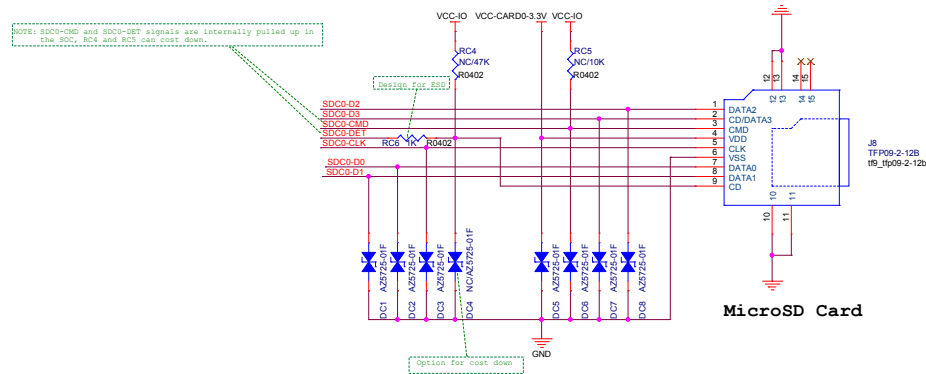


MicroSD Card


USB OTG0

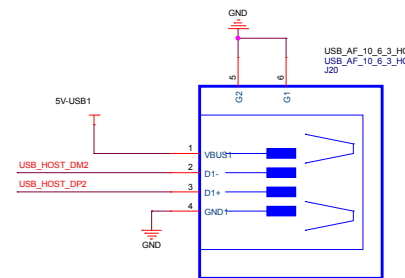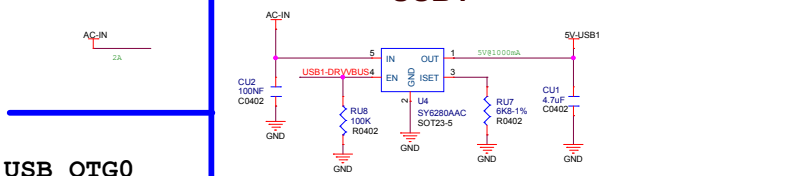


Option: USB2.0 Type-C

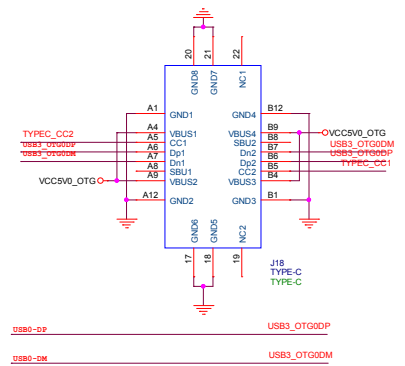

USB1

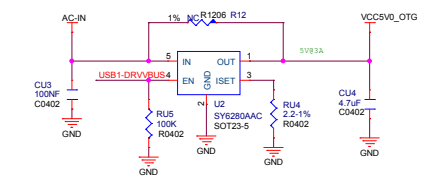

LVDS Panel




TO GPIO&LCD








MIPI Panel



TP COF Connector




TO GPIO

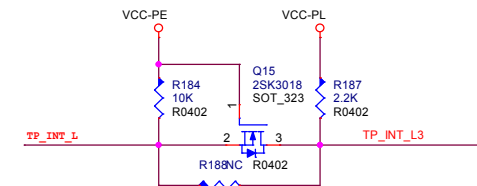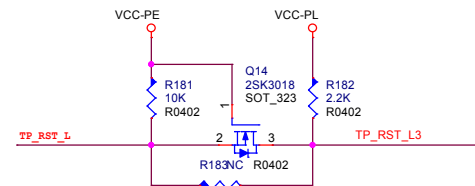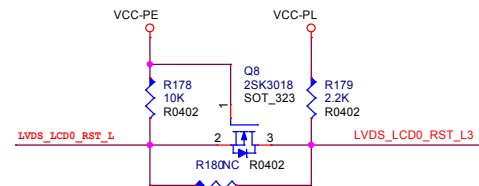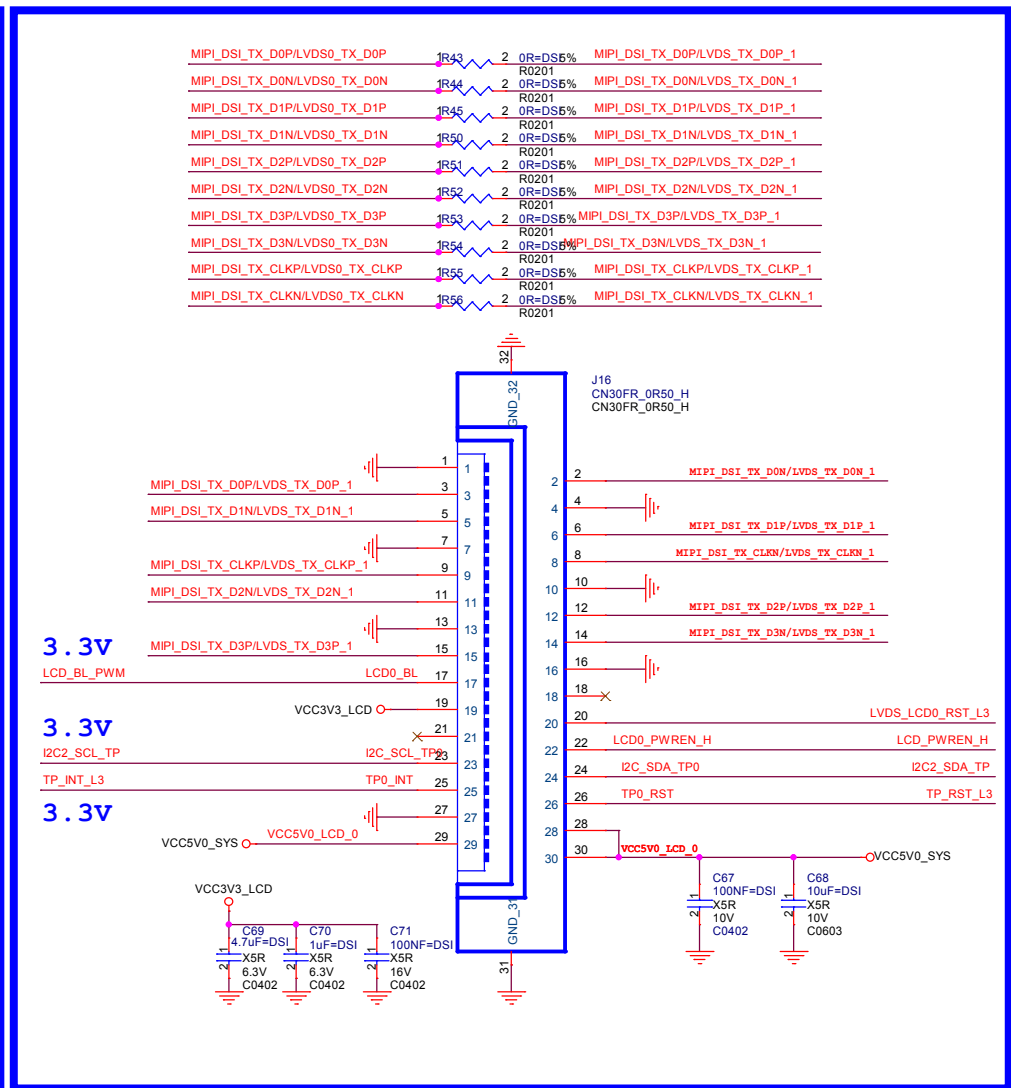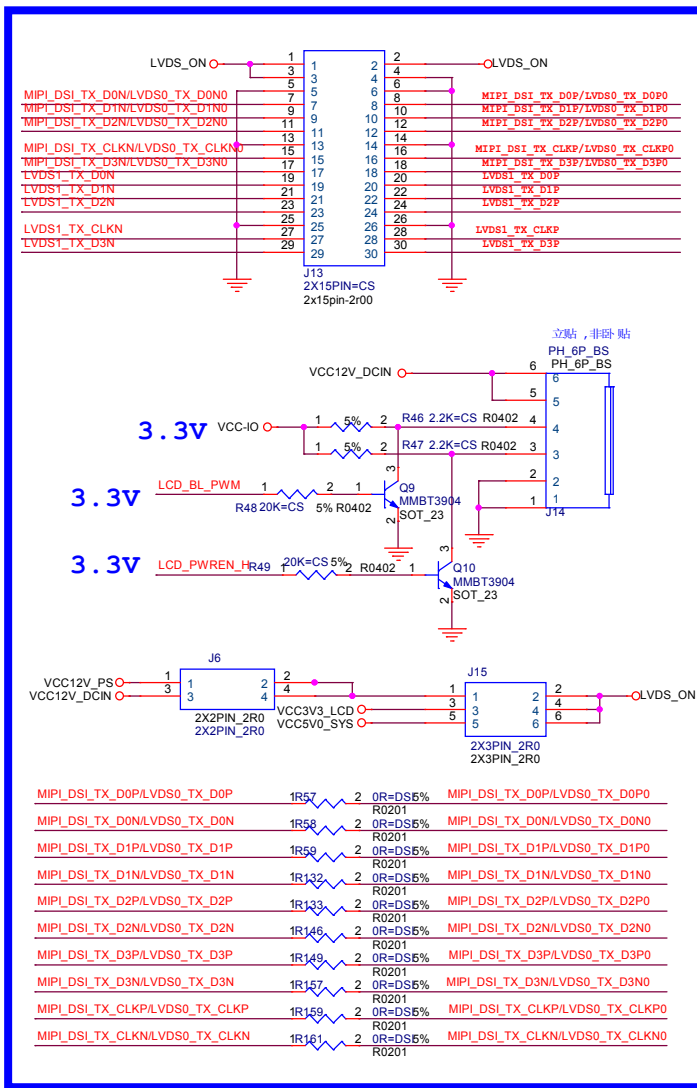


KICKPI		Document Title	
深圳市橙视科技发展有限公司		A133	
Page Title		PCB NO.	
LVDS-MIPI-DSI		K5C V1.0	
Page Size	Sch Designer	Pcb Designer	Project Stage
A3	TIM	TIM	V10
Date: Wednesday, November 27, 2024			
Sheet		13 of 21	


Power for LVDS Panel

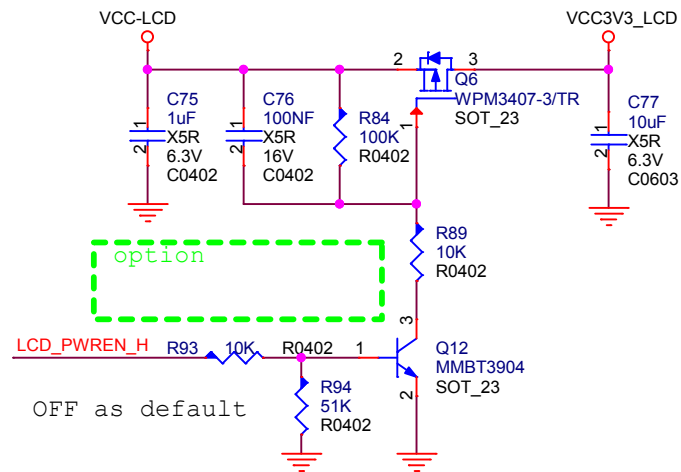



KICKPI		Document Title	
深圳市橙视科技发展有限公司		A133	
Page Title RTC		PCB NO. K5C V1.0	
Page Size A4	Sch Designer TIM	Pcb Designer TIM	Project Stage V10
Date: Wednesday, November 27, 2024		Sheet 14 of 21	

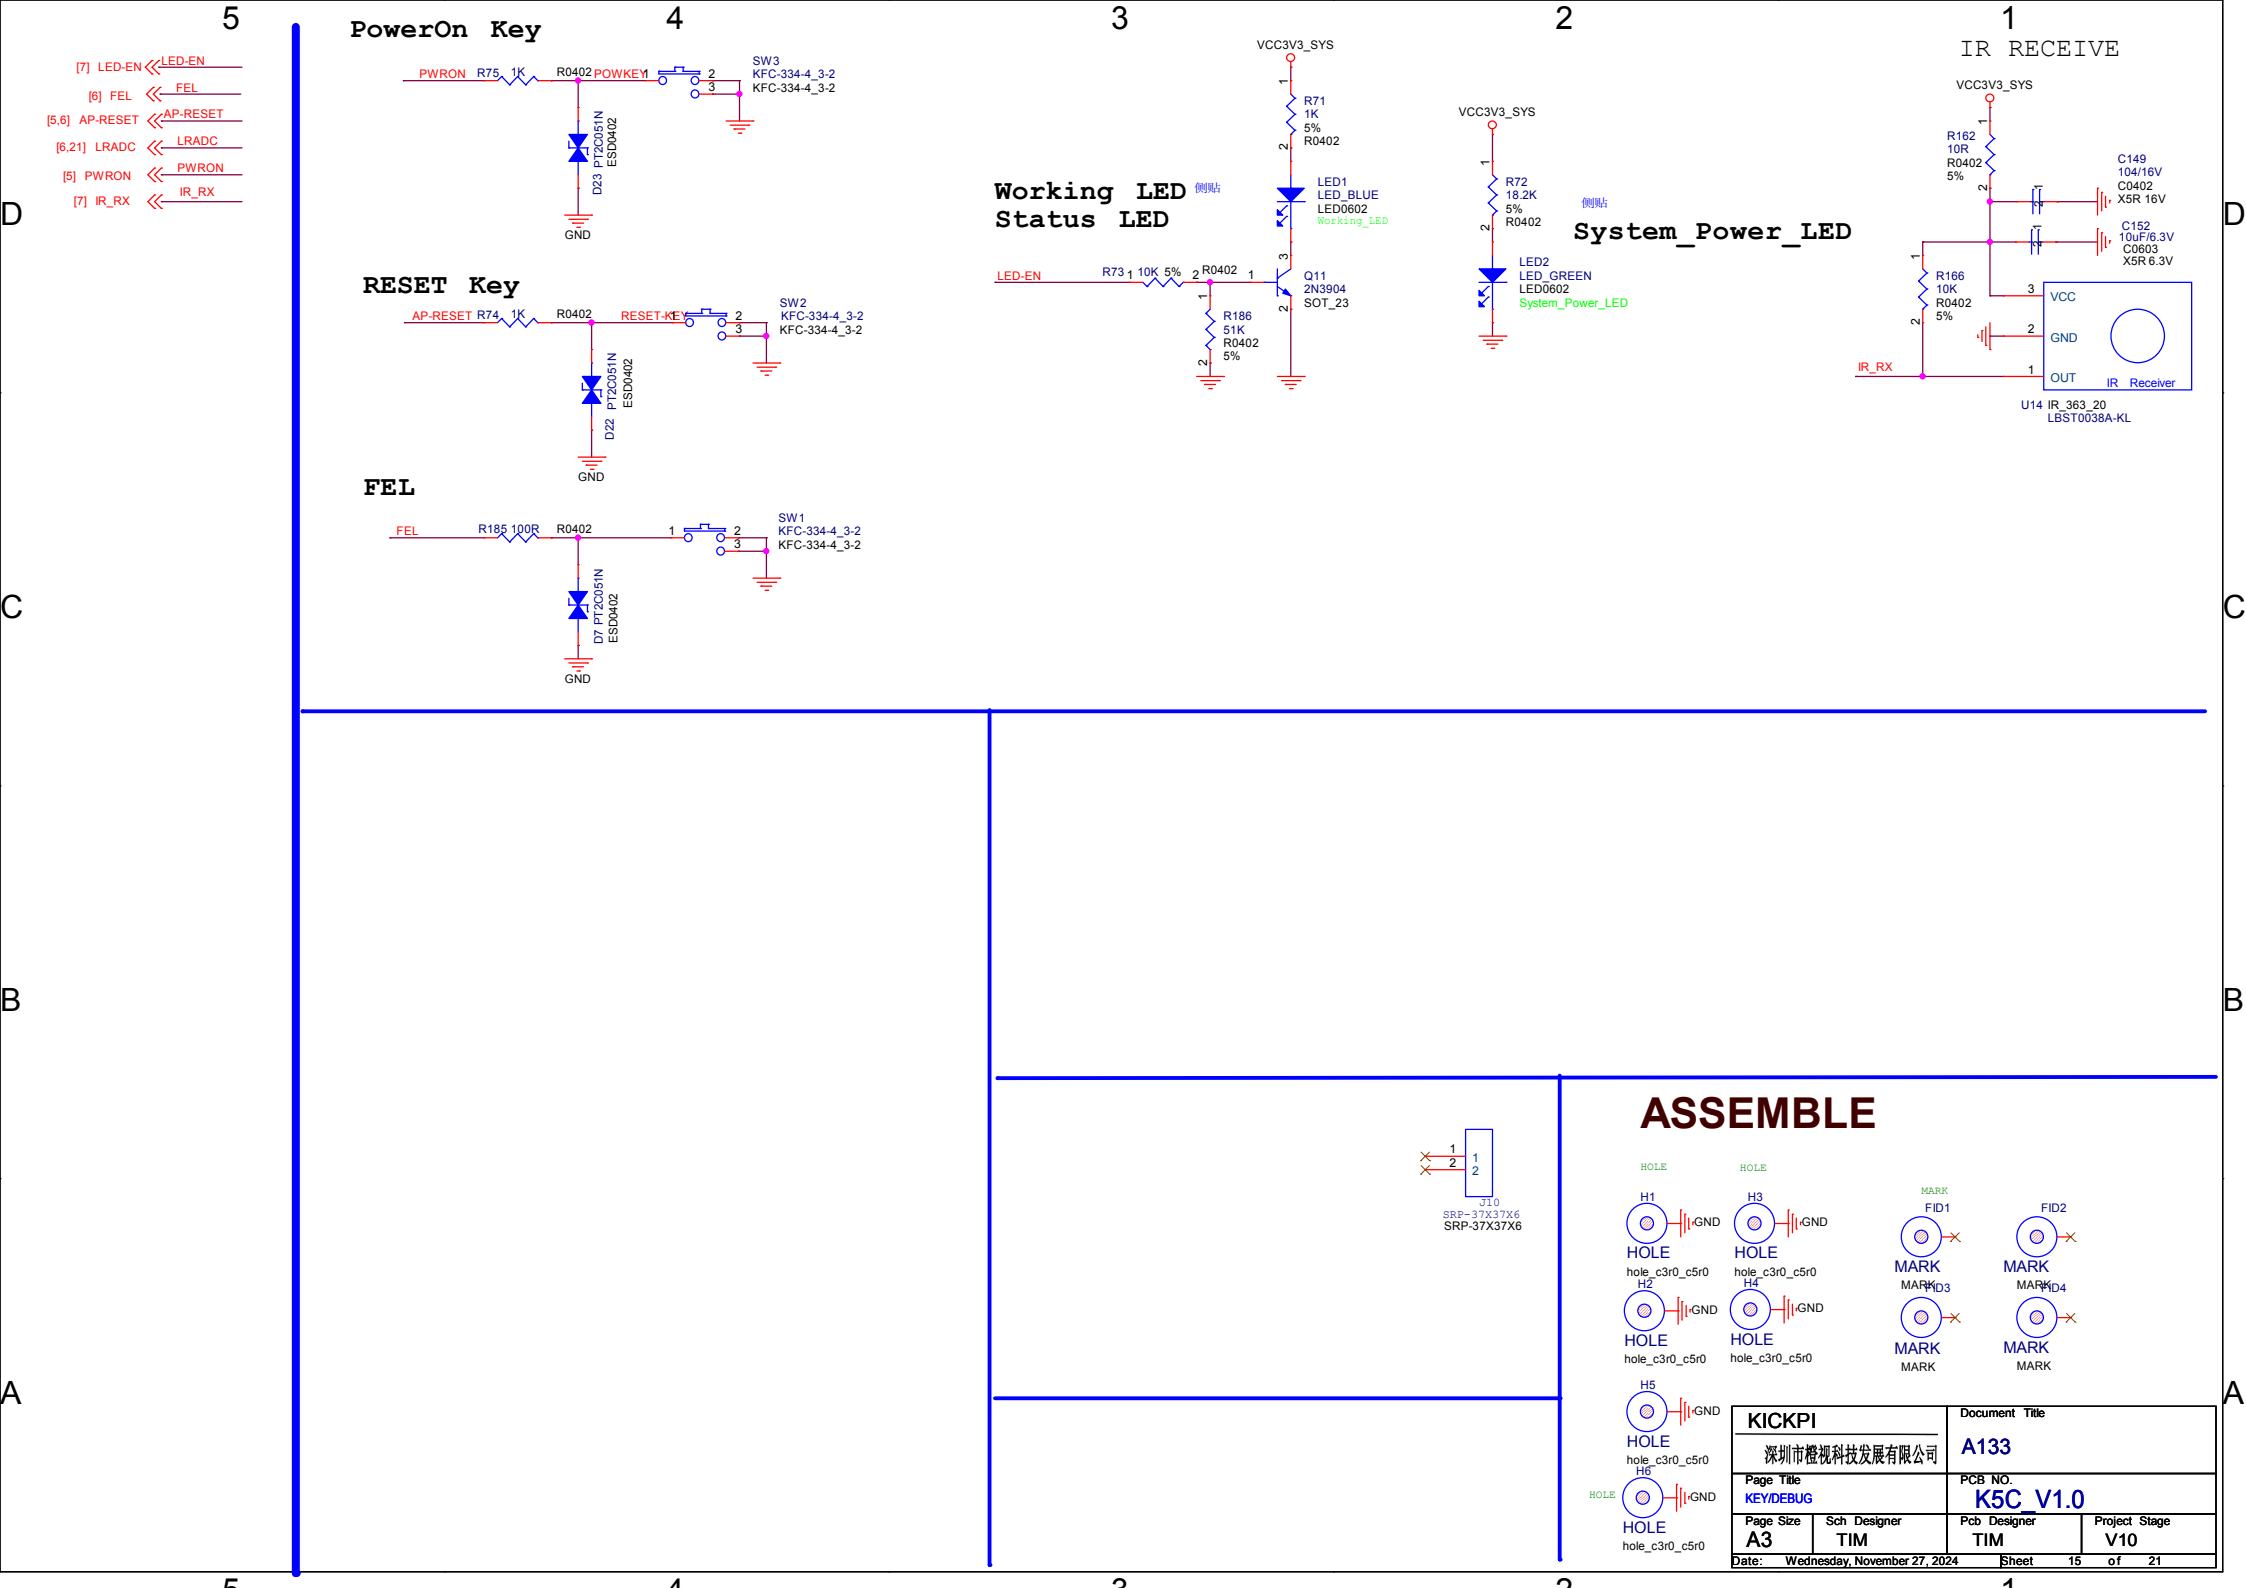

12V/3A DCIN

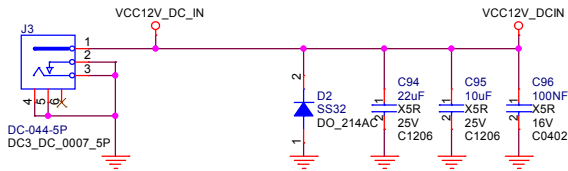

VCC5V0_SYS

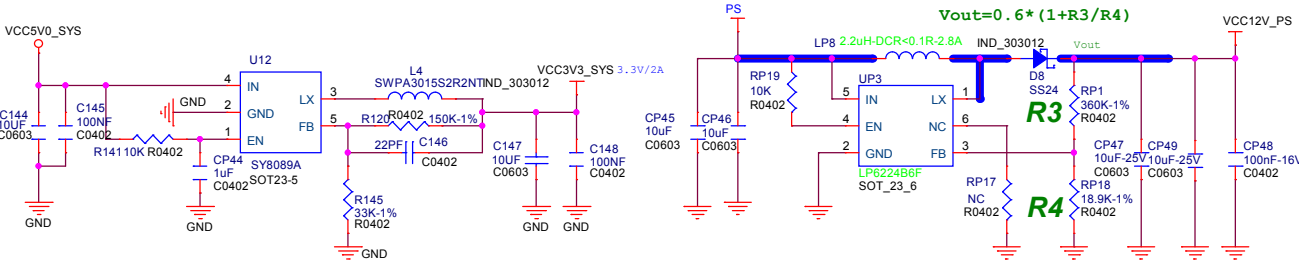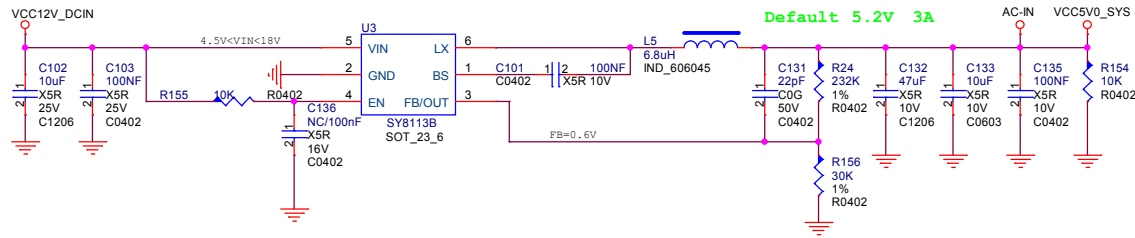

KICKPI		Document Title	
深圳市橙视科技发展有限公司		A133	
Page Title		PCB NO.	
POWER		K5C_V1.0	
Page Size	Sch Designer	Pcb Designer	Project Stage
A3	TIM	TIM	V10
Date: Wednesday, November 27, 2024		Sheet	17 of 21

USB_HUB

KICKPI		Document Title	
深圳市橙视科技发展有限公司		A133	
Page Title USB-HUB		PCB NO. K5C V1.0	
Page Size A3	Sch. Designer TIM	Pcb Designer TIM	Project Stage V10
Date: Wednesday, November 27, 2024		Sheet 18 of 21	




```

└─┬──────────┘ └─┬──────────┘
  USB_4G_DP [18]
  USB_4G_DM [18]

```





PCIE_PWREN_H >> USB1-DRVVBUS [7,11,18]

USB1-DRVVBUS

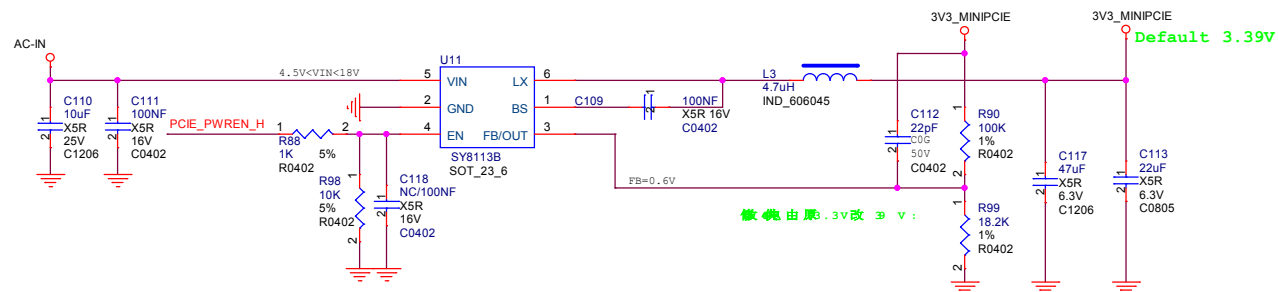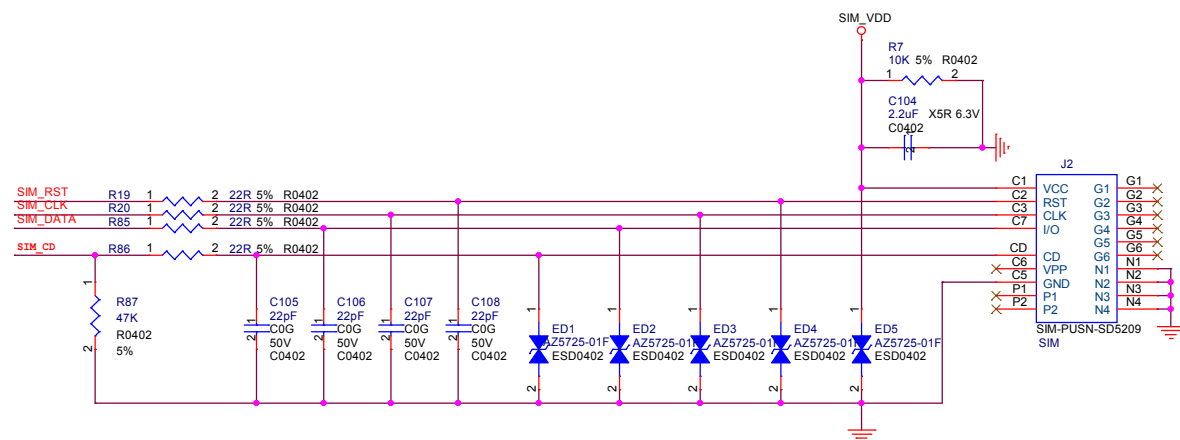
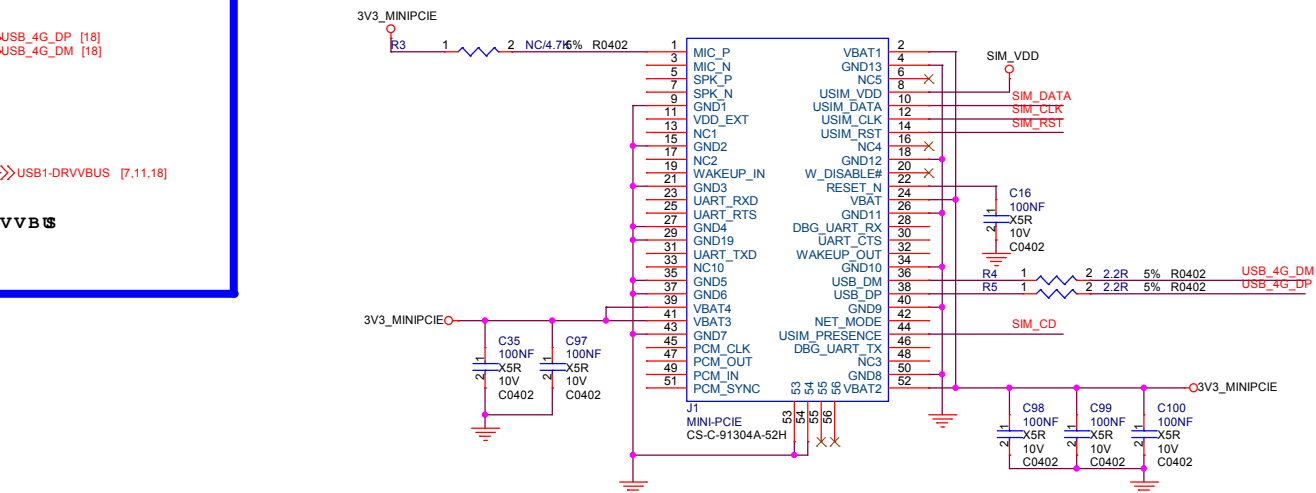


KICKPI		Document Title	
深圳市橙视科技发展有限公司		A133	
Page Title 4G_MINI_USB2.0		PCB NO. K5C_V1.0	
Page Size A3	Sch Designer TIM	Pcb Designer TIM	Project Stage V10
Date: Wednesday, November 27, 2024		Sheet 19 of 21	



10M/100M/1000M ETH

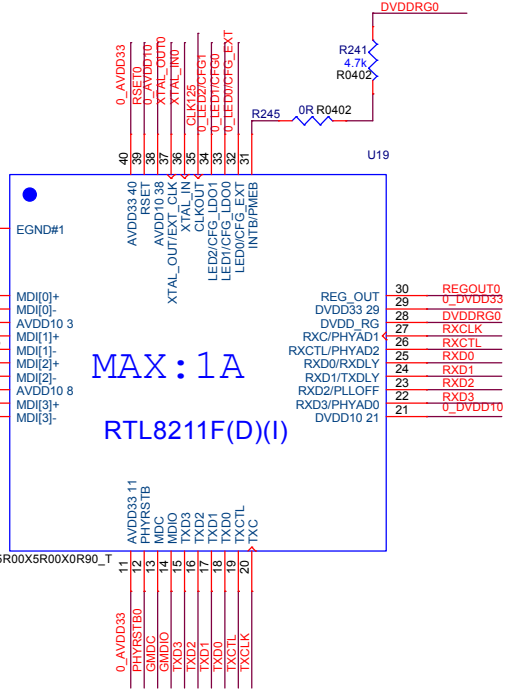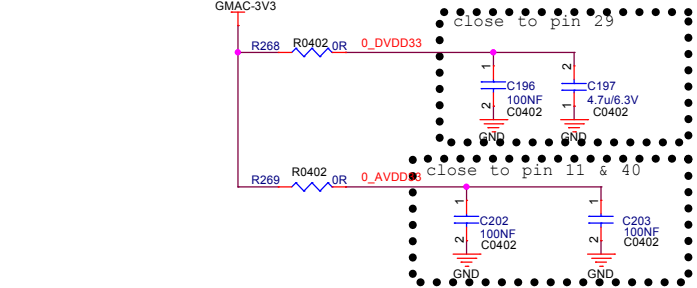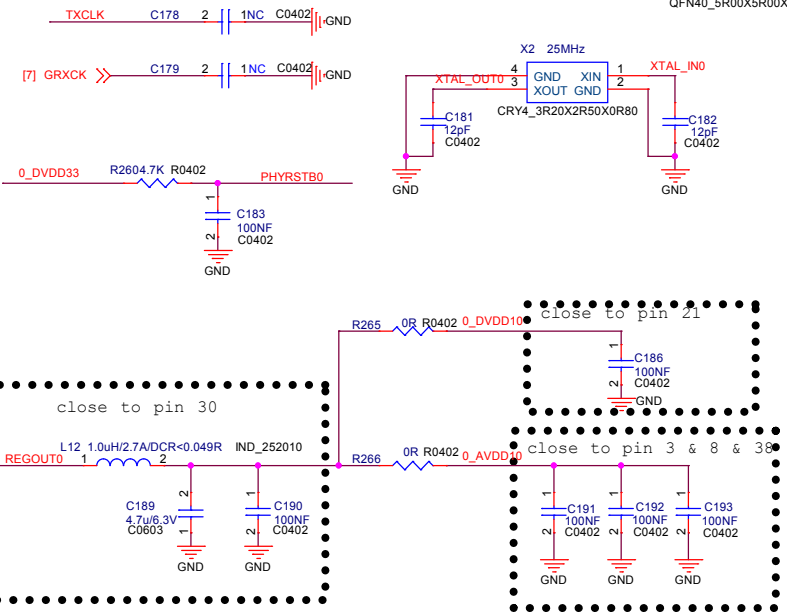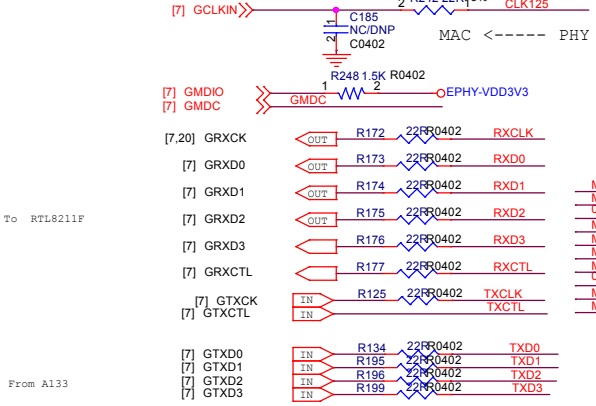



MAX:1A
RTL8211F(D)(I)

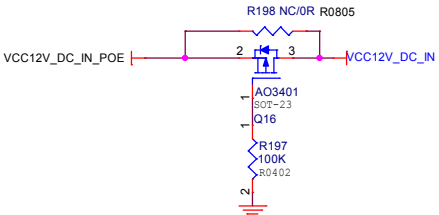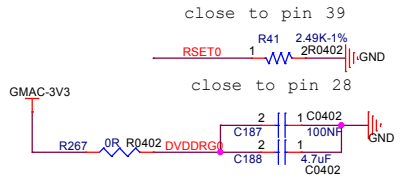

The transformer center tap must be short together

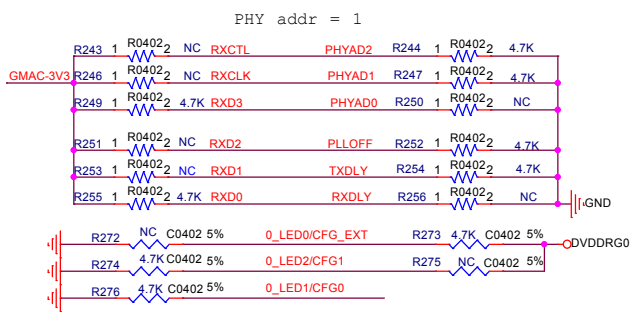

VCC_PHY0_IO Voltage Config

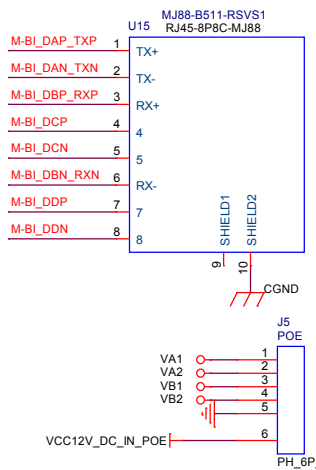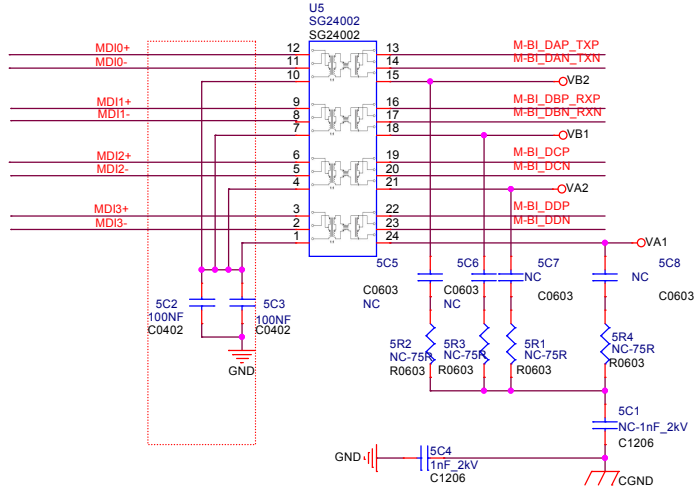

KICKPI		Document Title	
深圳市橙视科技发展有限公司		A133	
Page Title		PCB NO.	
Ethernet		K5C V1.0	
Page Size	Sch Designer	Pcb Designer	Project Stage
A3	TIM	TIM	V10
Date: Wednesday, November 27, 2024		Sheet	20 of 21

Debug UART0_M0



I2C_3




UART2



LRADC



GPIO



USB2.0



SPI0



GPIO

