


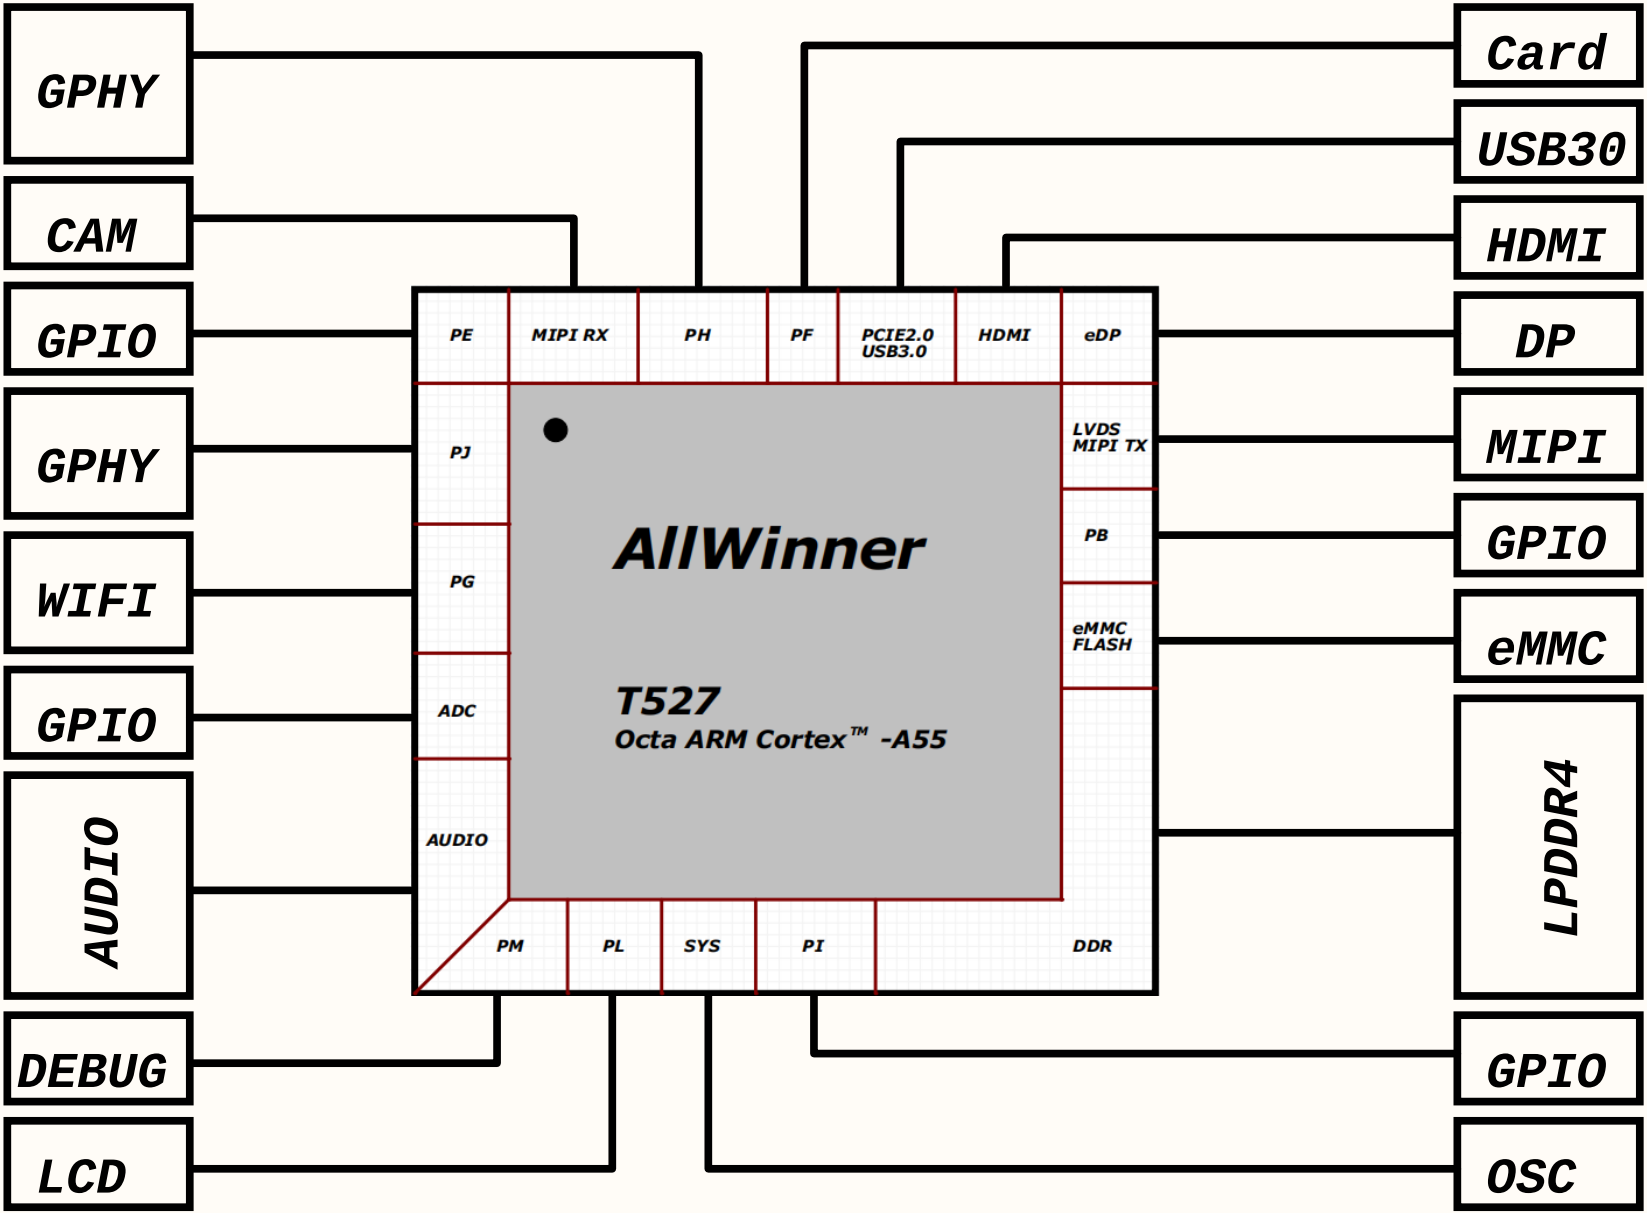

TITLE: T527 MicroPC

REV: 1.0



Company: Nopiskl


Sheet: 1



Total: 3

Date: 2026-06-18

Drawn By: Nopiskl

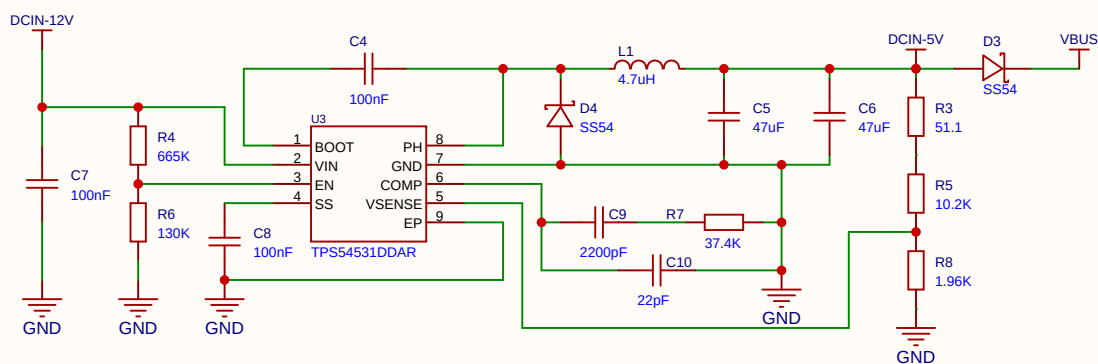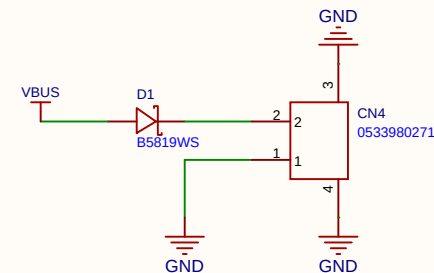

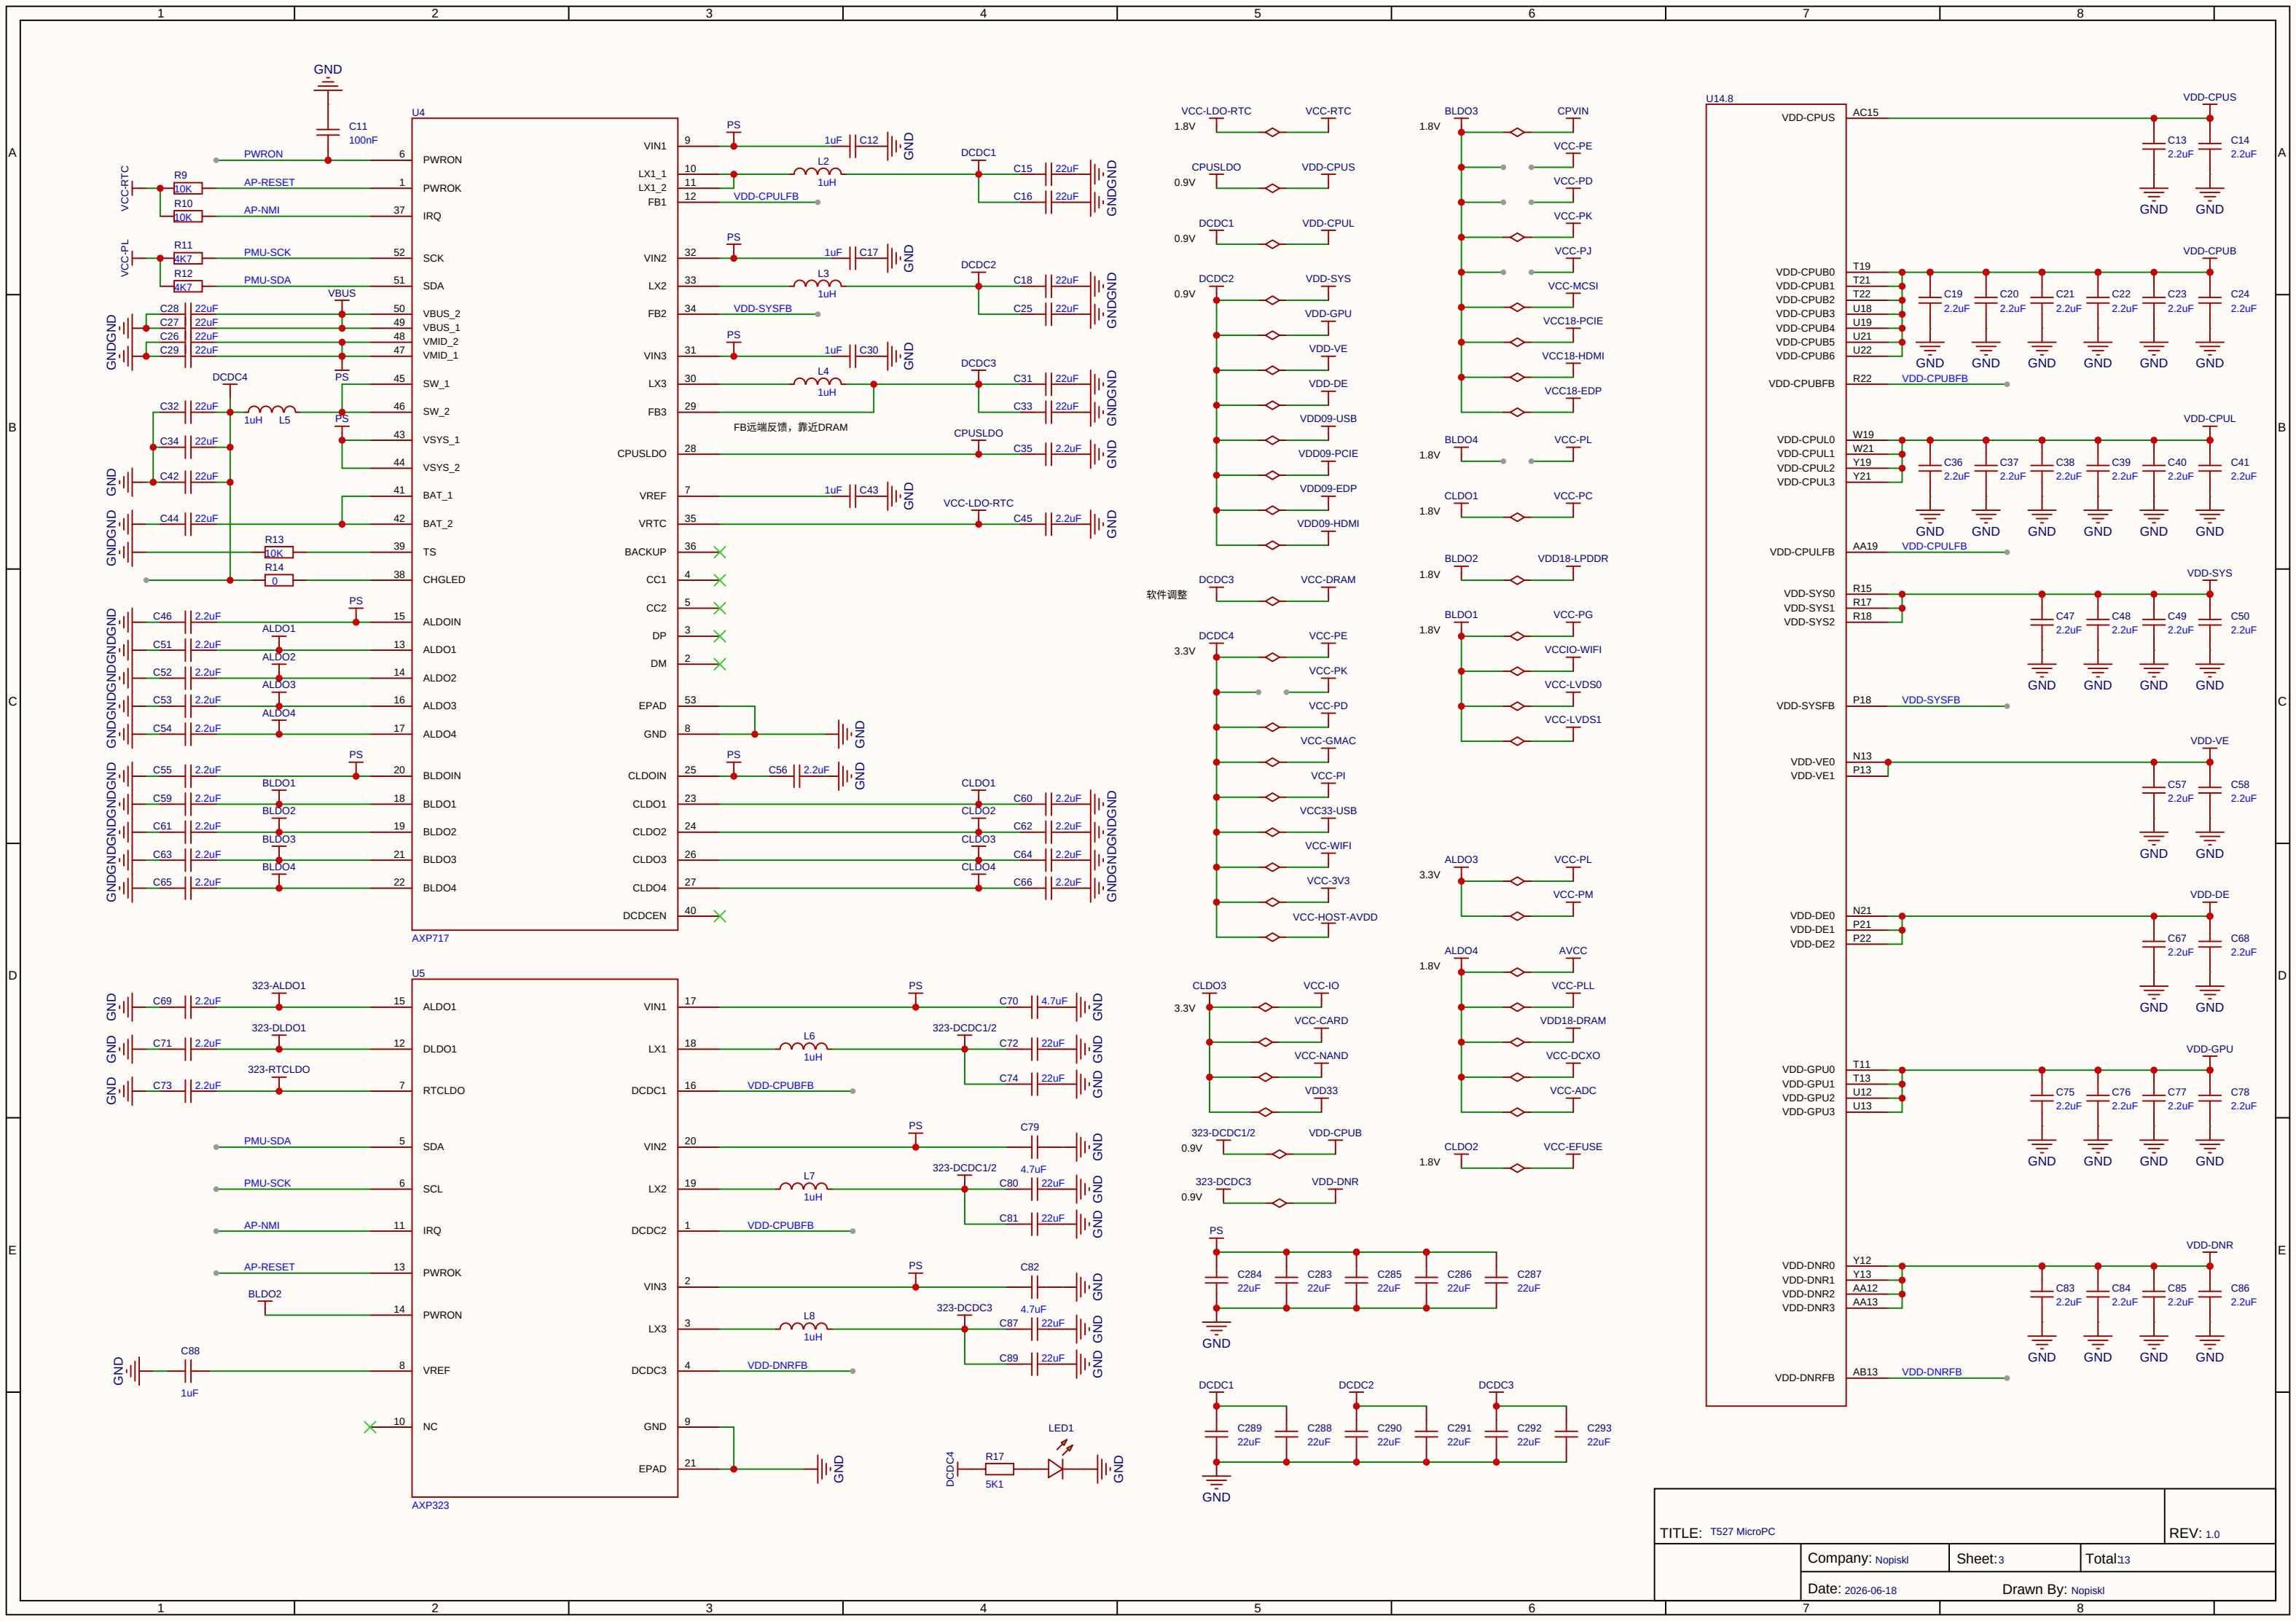


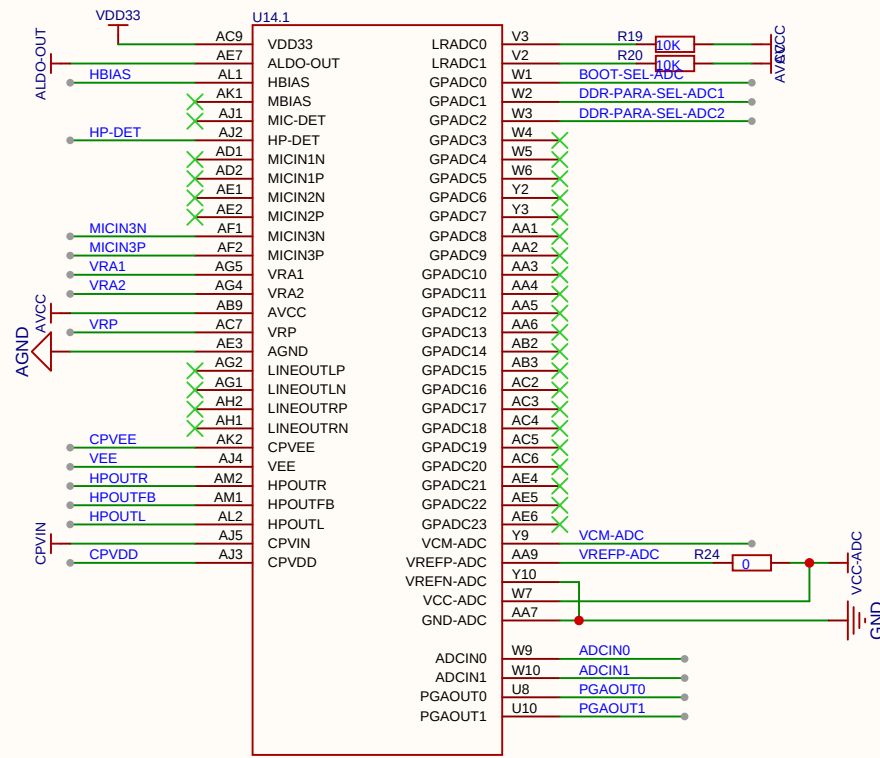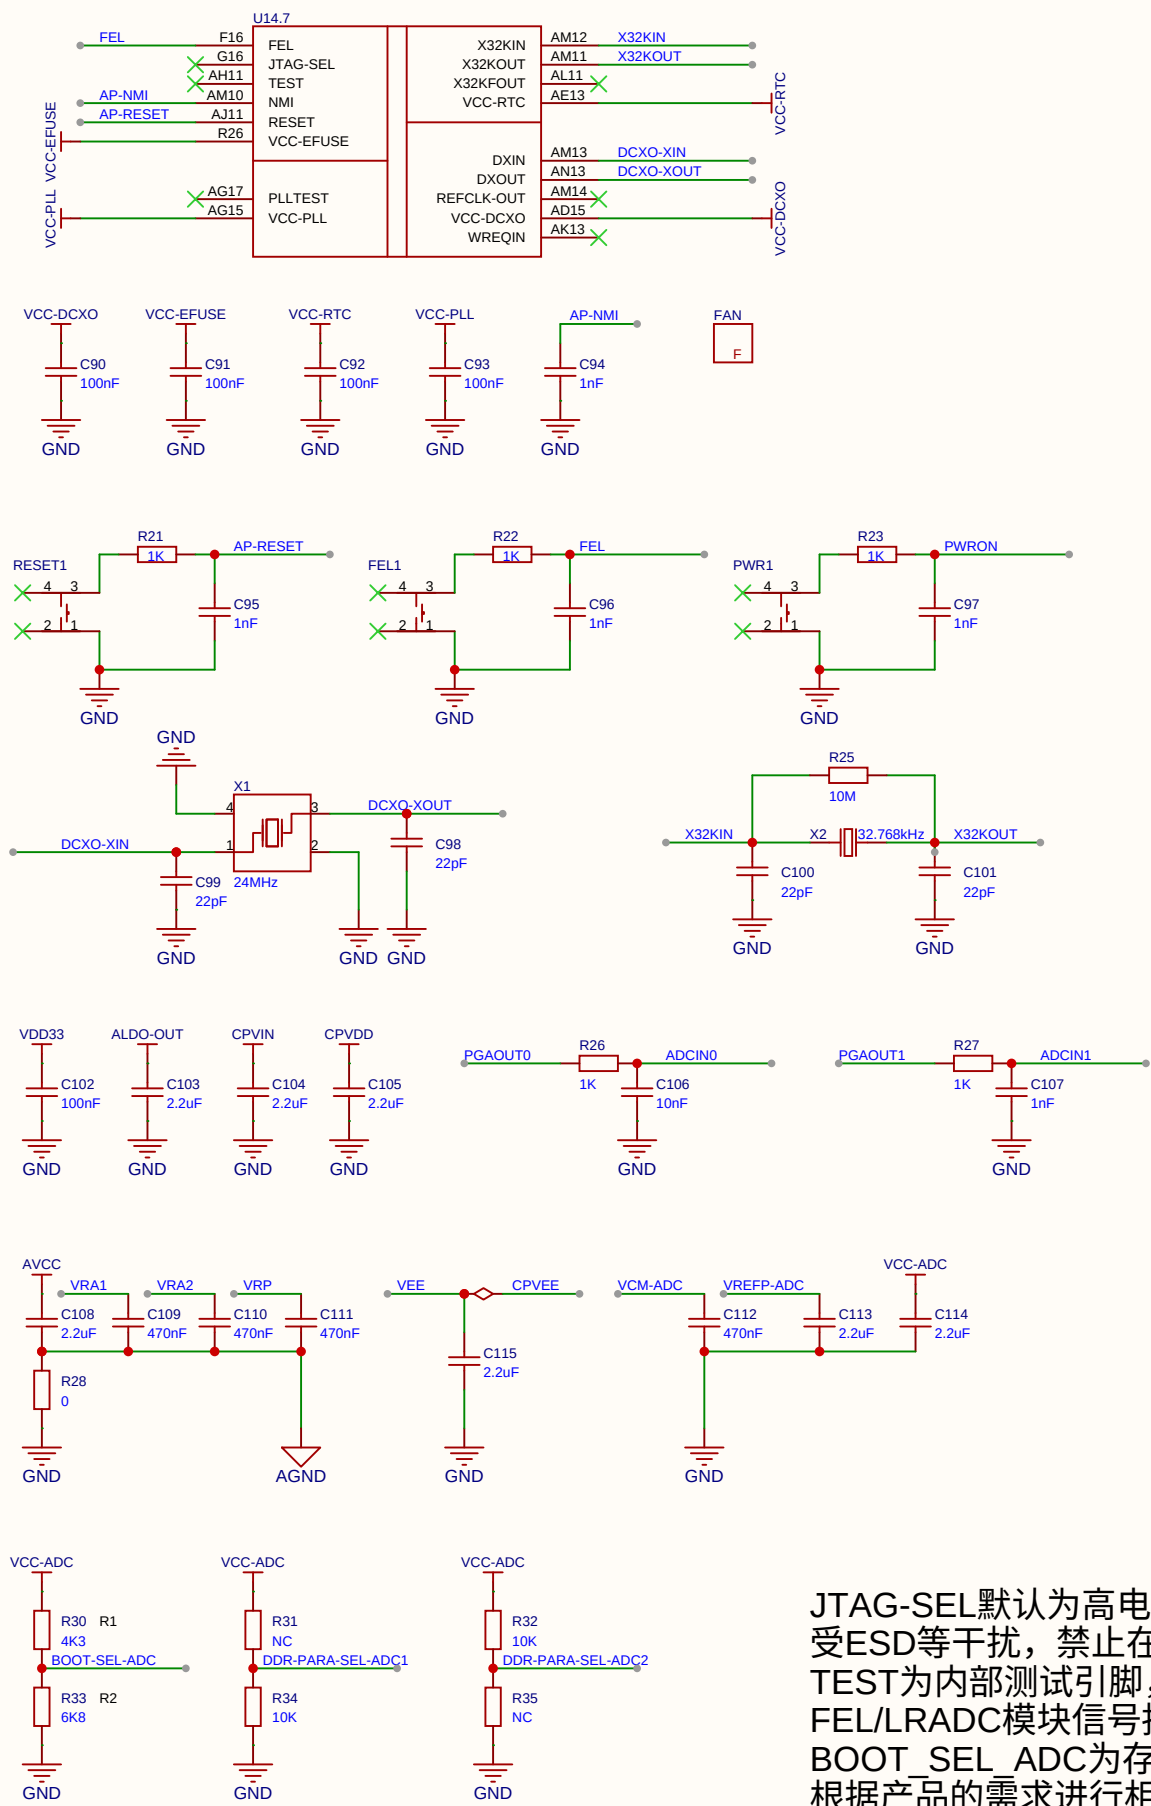




NO.	R1	R2	Boot Select type
1	NC	10K	SMHC0->MLC NAND->SLC NAND->try(except SPI in PJ)
2	10K	1K	SMHC0->SLC NAND->MLC NAND->try(except SPI in PJ)
3	10K	2K2	SMHC0->EMMC_USER->EMMC_BOOT->try(except SPI in PJ)
4	10K	3K9	SMHC0->EMMC_BOOT->EMMC_USER->try(except SPI in PJ)
5	6K8	4K7	SMHC0->SPI NOR->try(except SPI in PJ)
6	6K8	6K8	SMHC0->SPI NAND->try(except SPI in PJ)
7	4K3	6K8	SMHC0->SPI NOR in PJ->try
8	2K2	10K	SMHC0->SPI NAND in PJ->try
9	10K	NC	Reserved


try default order:(selected fail media will not try)
EMMC_USER->EMMC_BOOT->SLC NAND->MLC NAND->SPI NOR->SPI NAND


JTAG-SEL默认为高电平，默认浮空；若要配置为低电平，直接接地即可。此信号为敏感信号，易受ESD等干扰，禁止在实际产品中引出一段浮空走线。
TEST为内部测试引脚，实际应用请做悬空处理，禁止引出一段浮空走线。
FEL/LRADC模块信号接按键时要接1nF去抖动电容，请勿删除或者更改为其他容值。
BOOT_SEL_ADC为存储介质启动先后顺序配置脚，用于调整NAND和EMMC的启动顺序，可以根据产品的需求进行相关配置。T527默认开启BOOT_SEL_ADC pin识别启动顺序。

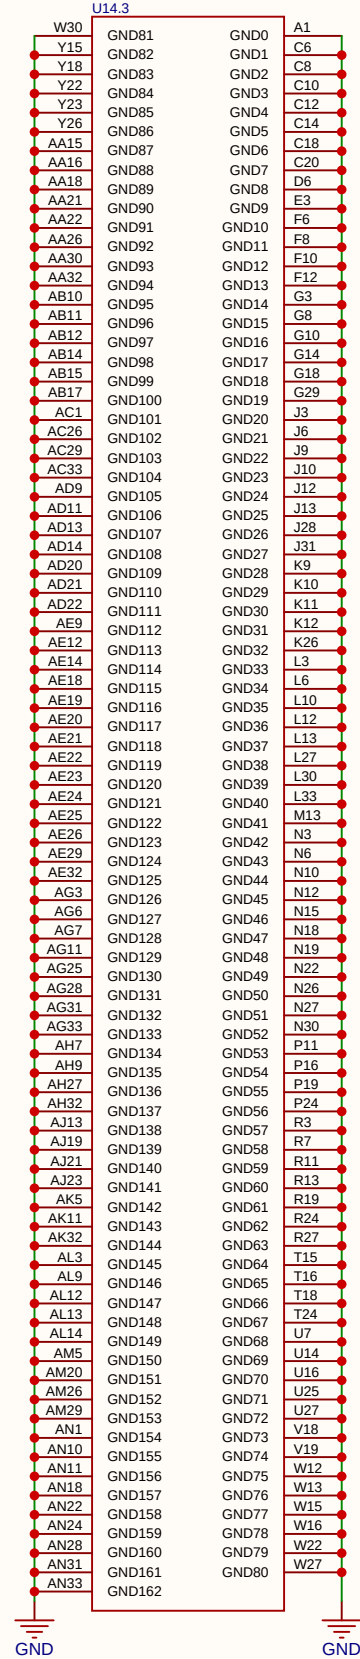


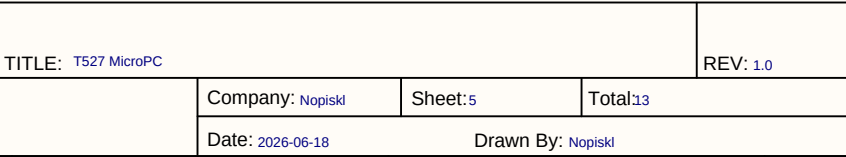







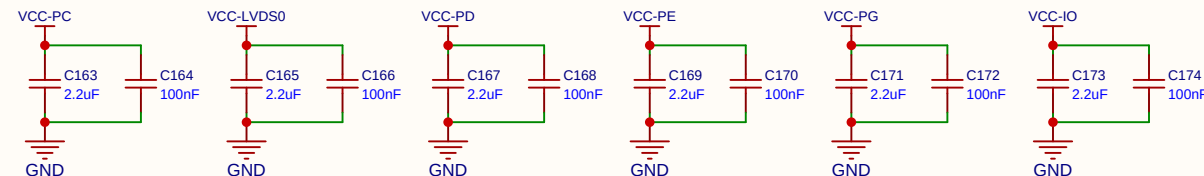
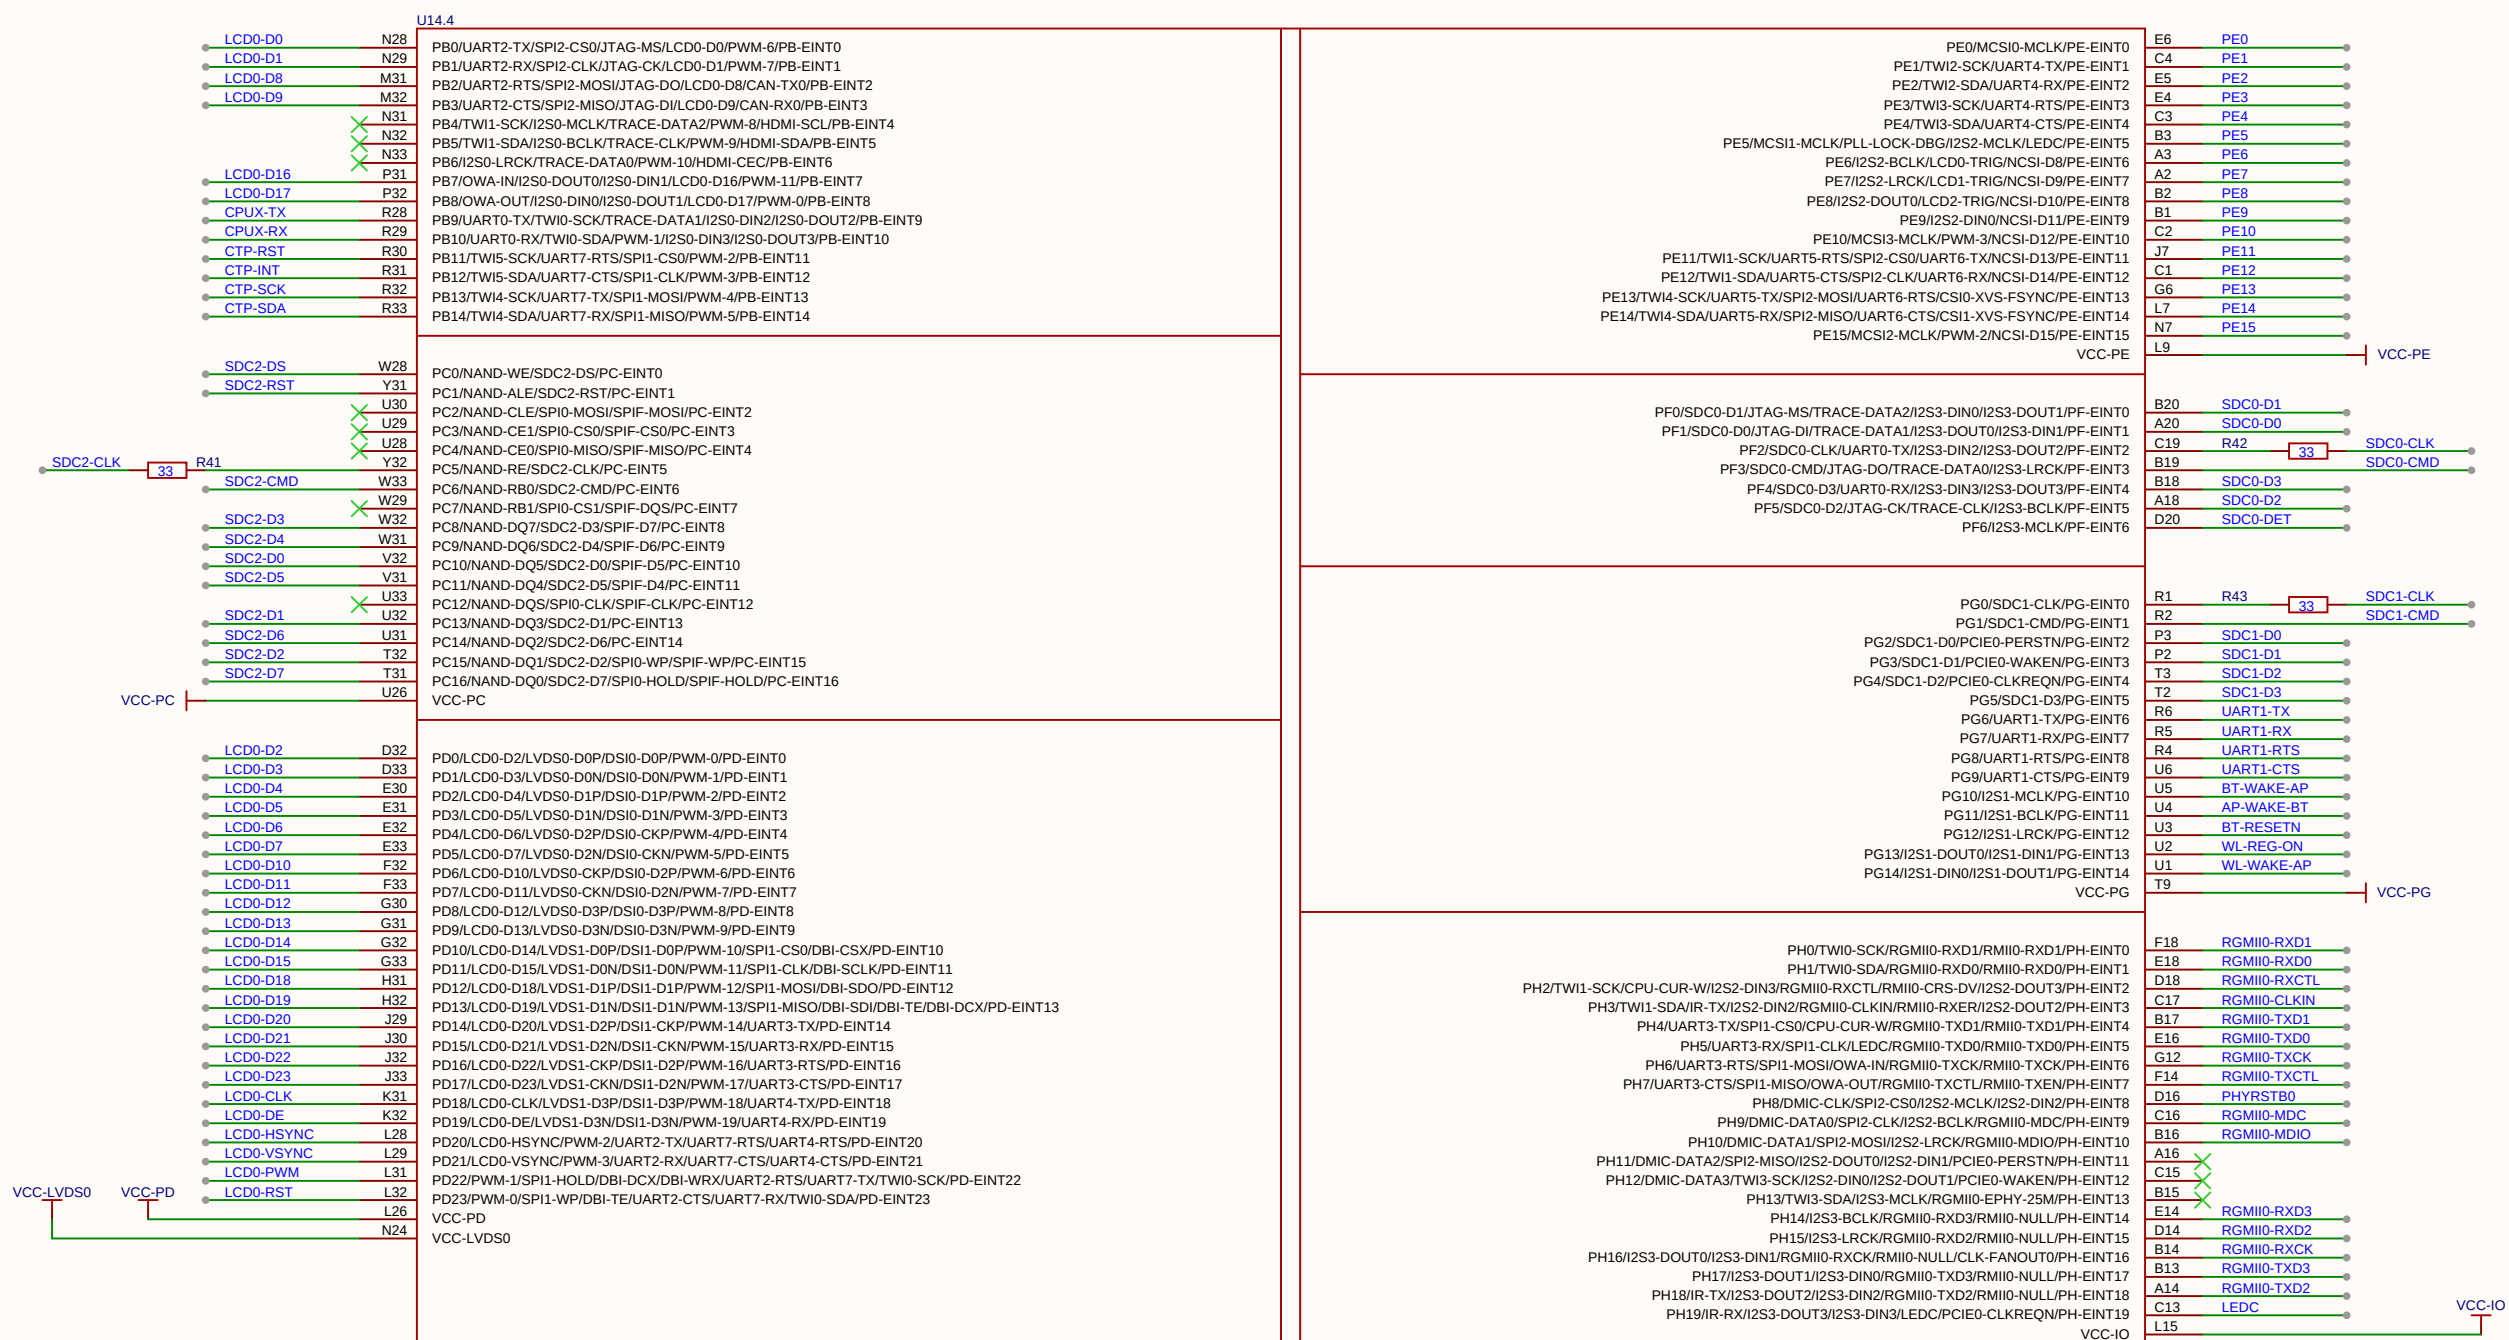


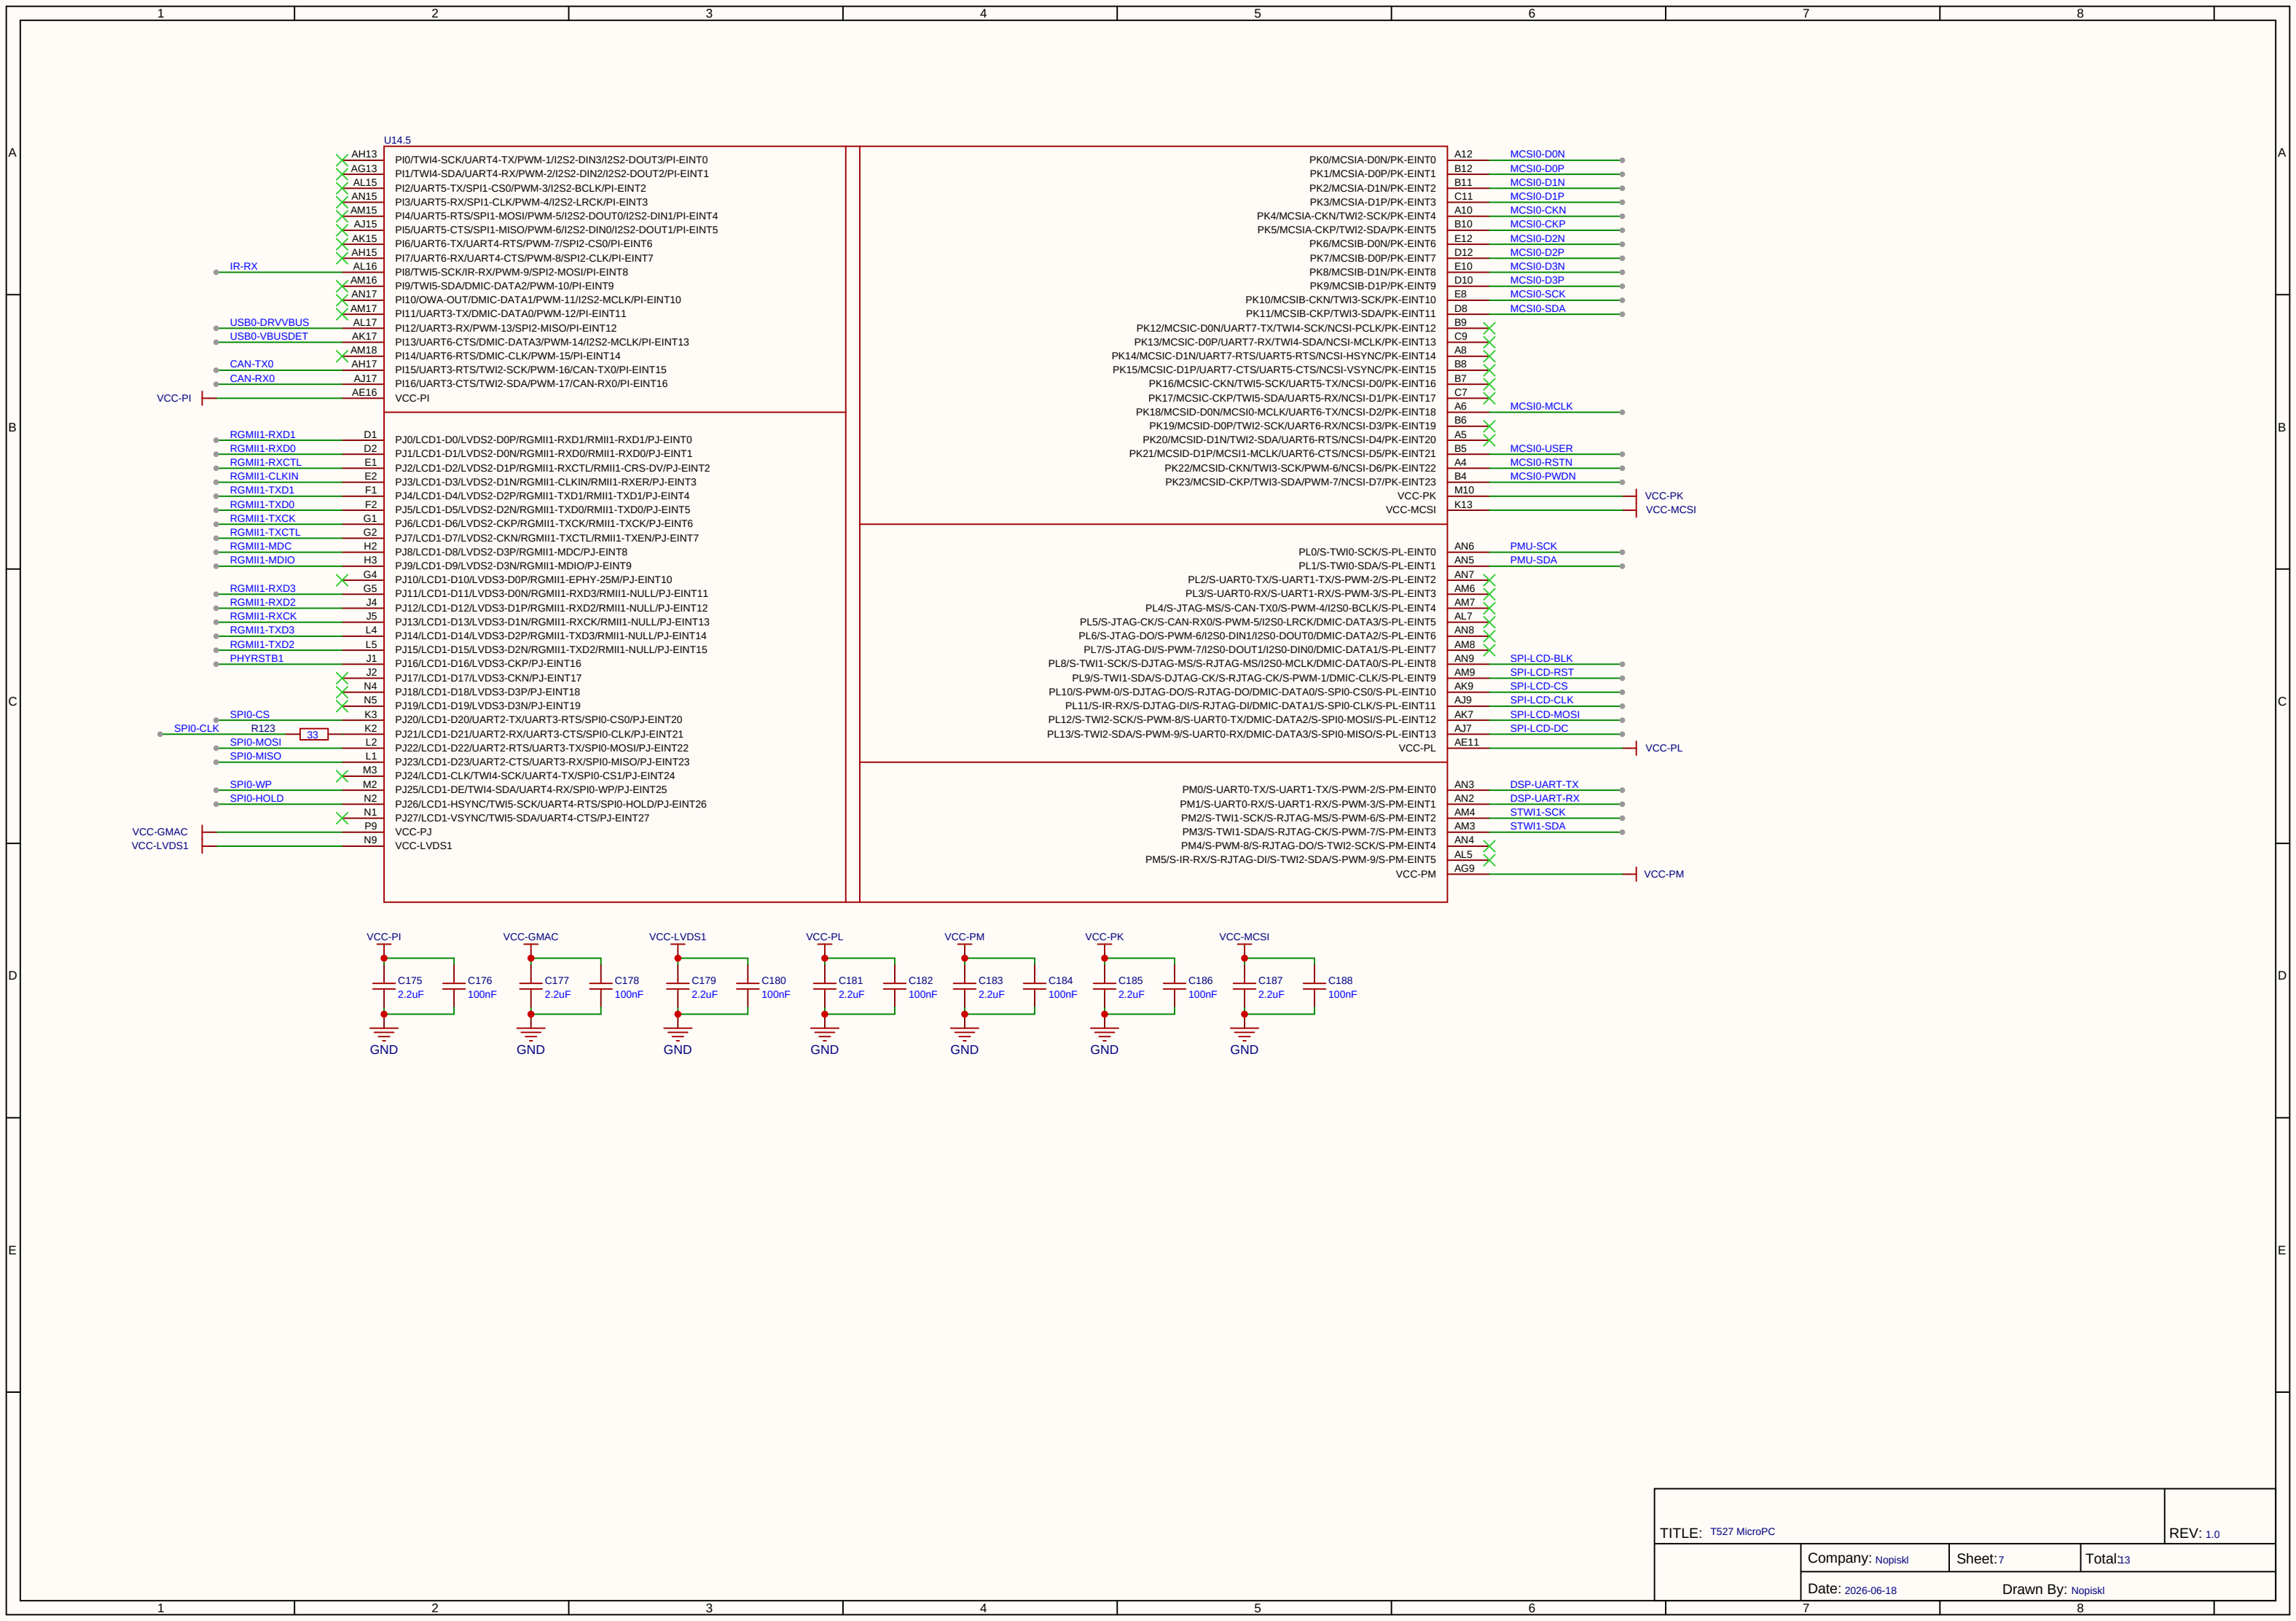

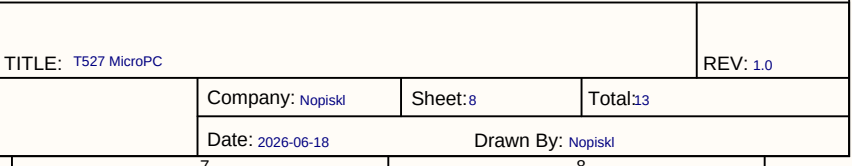


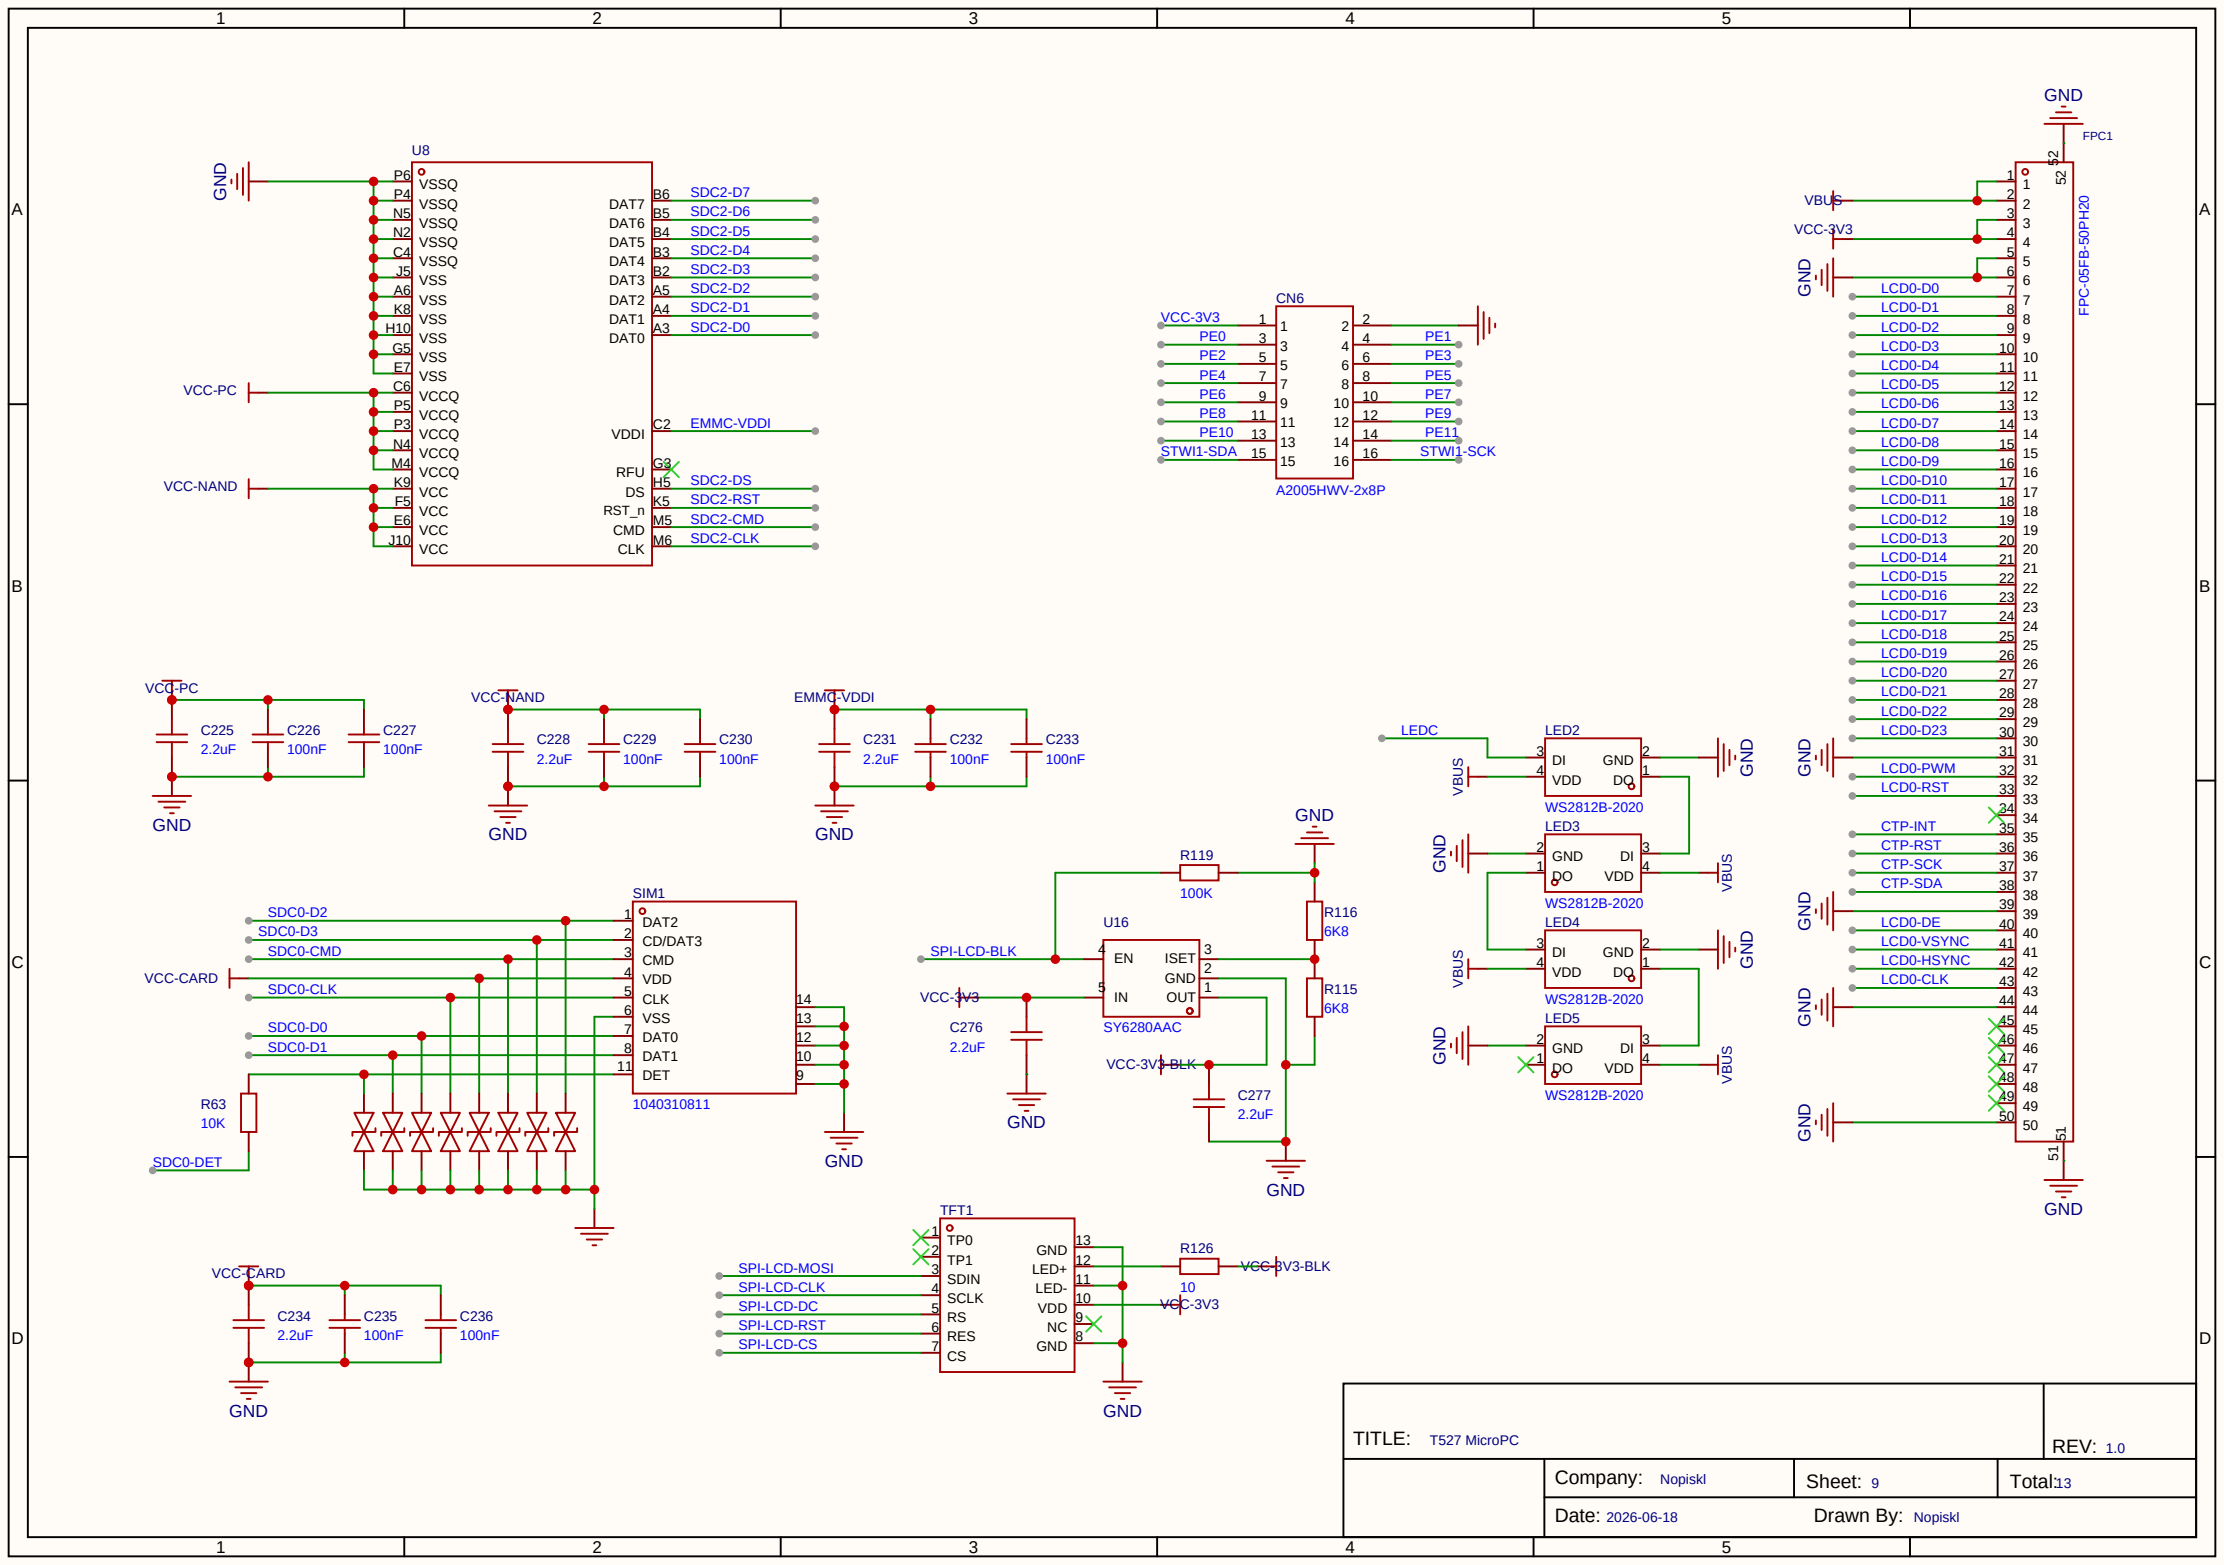

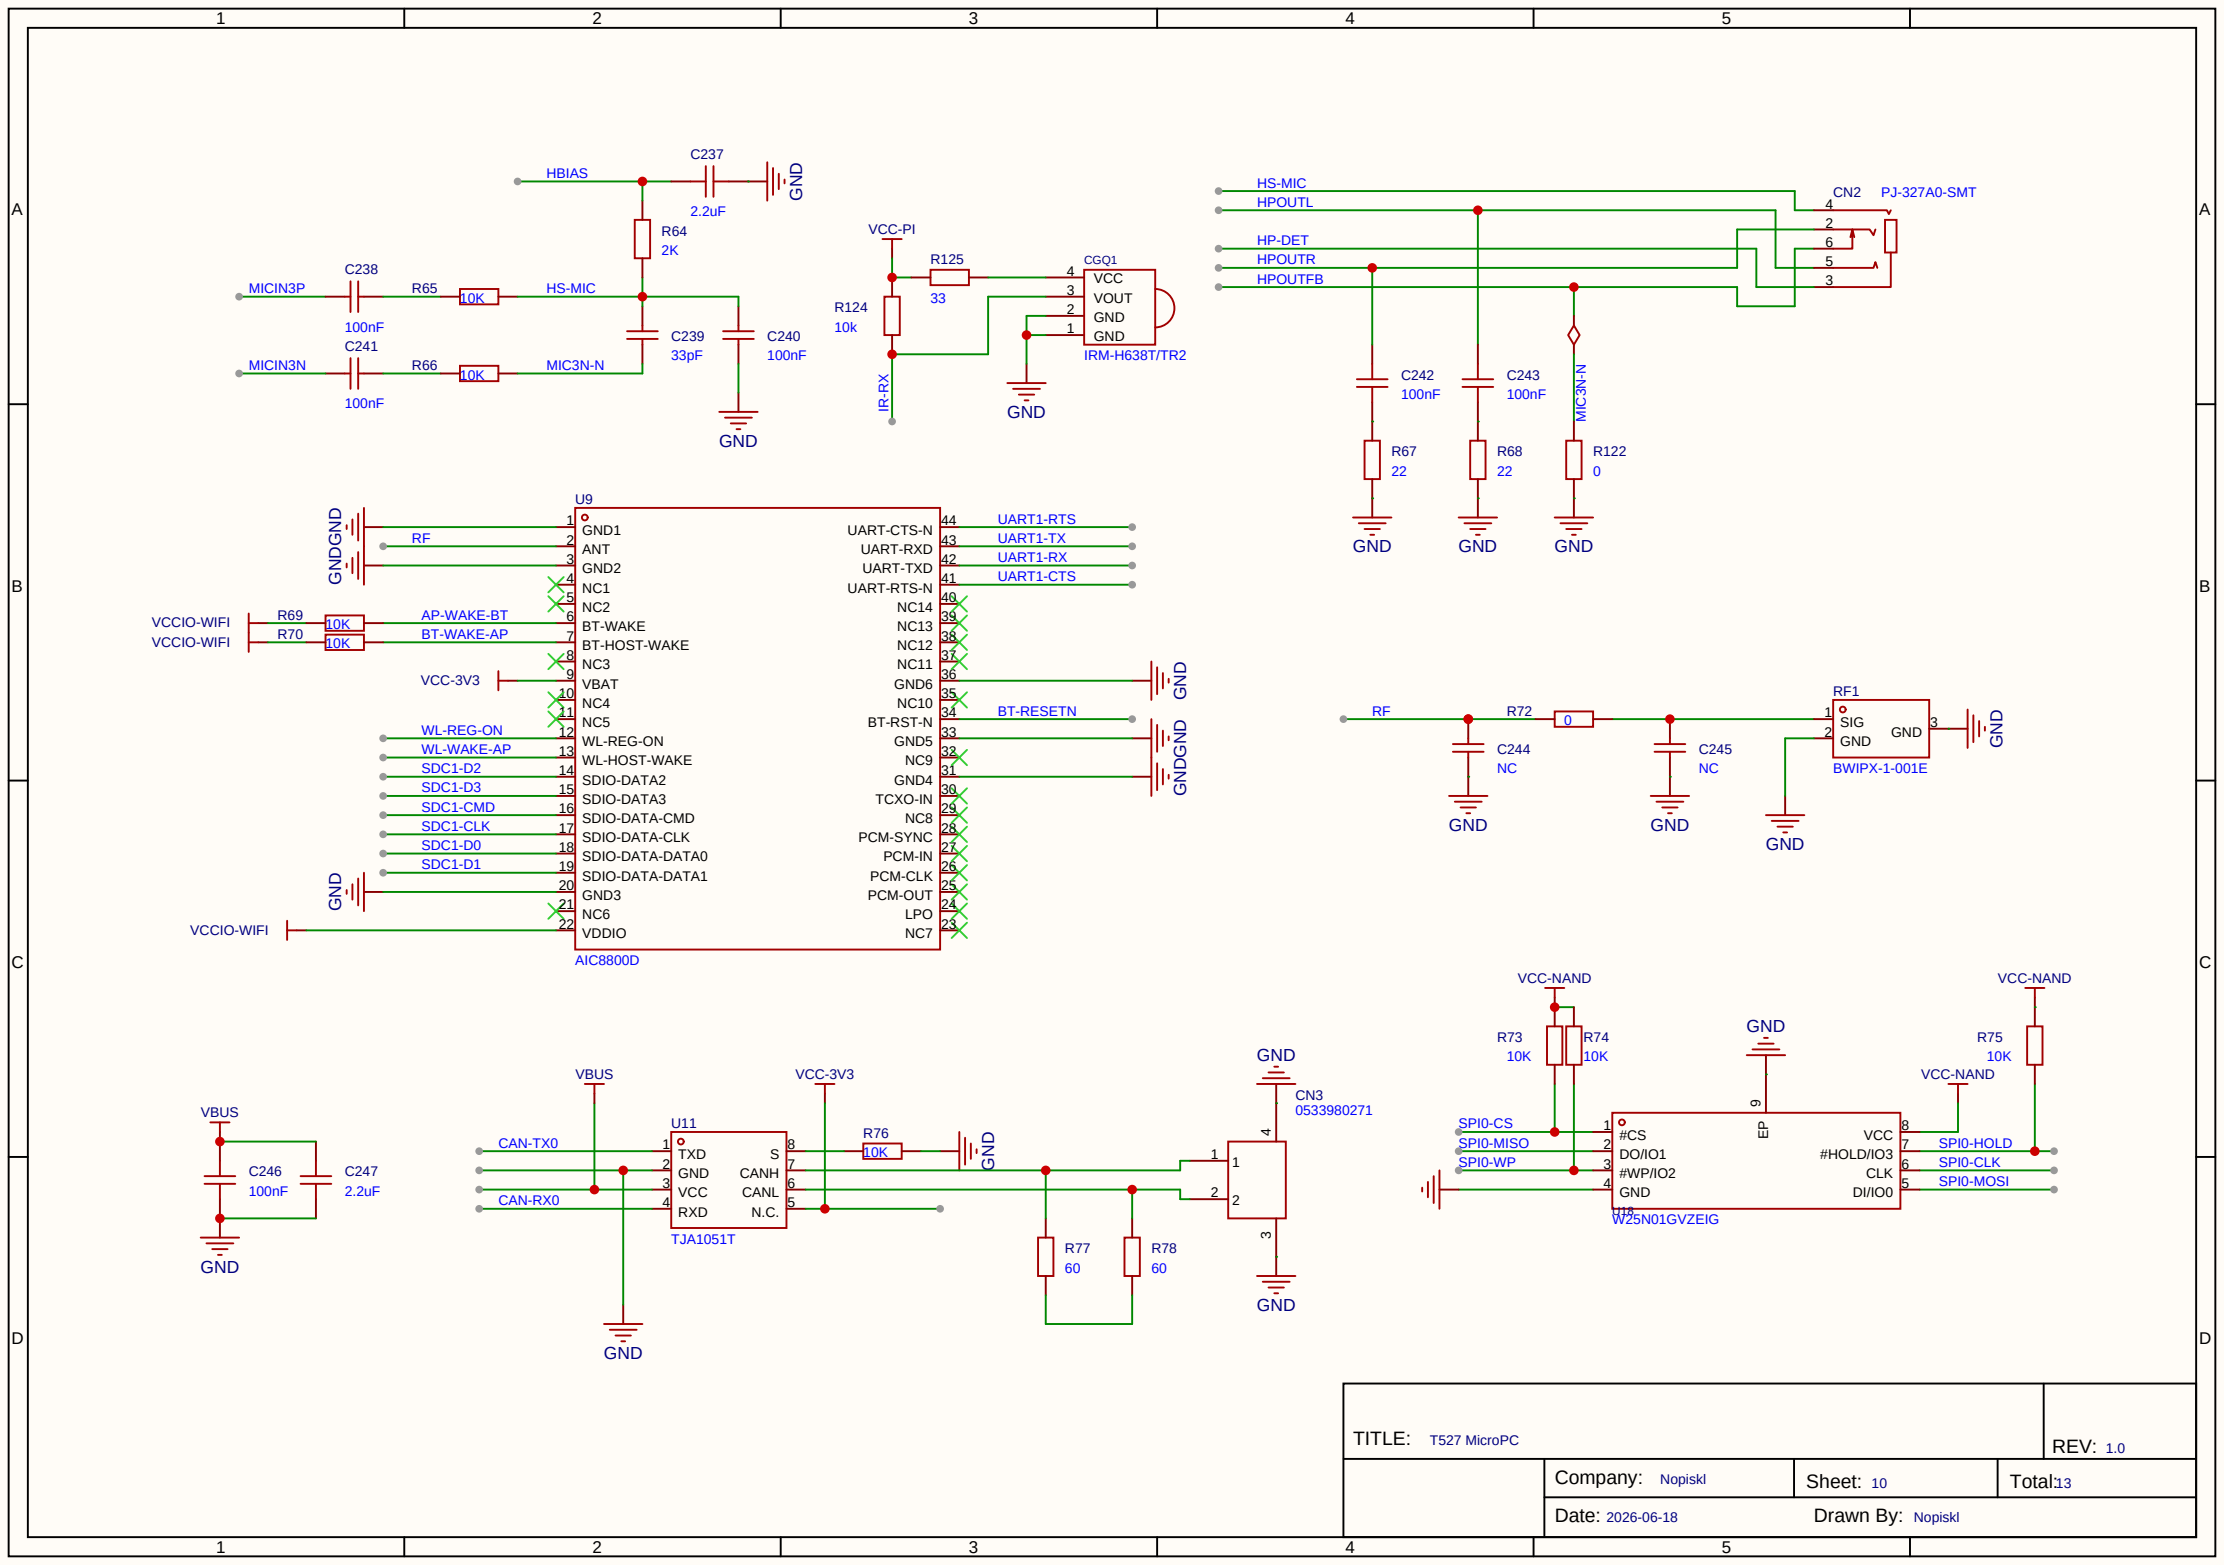

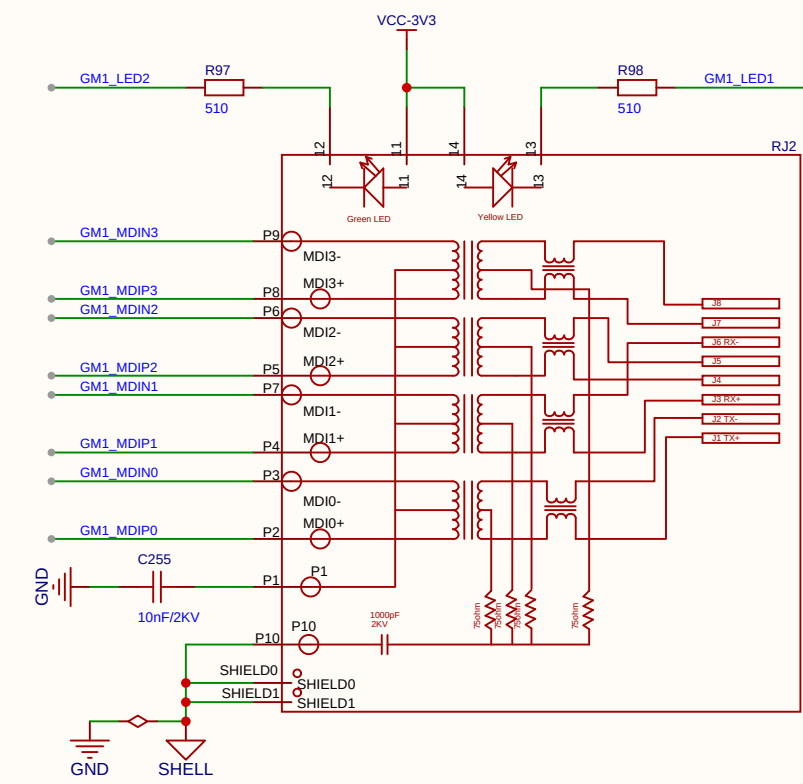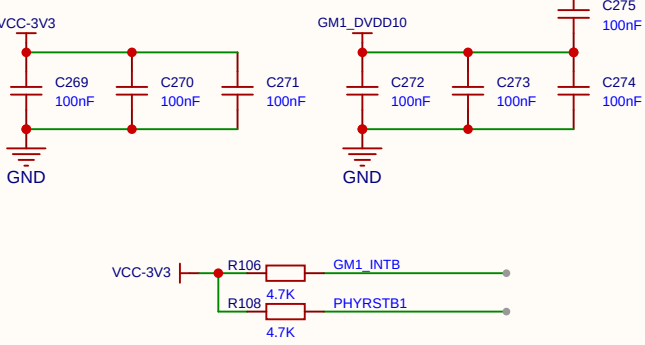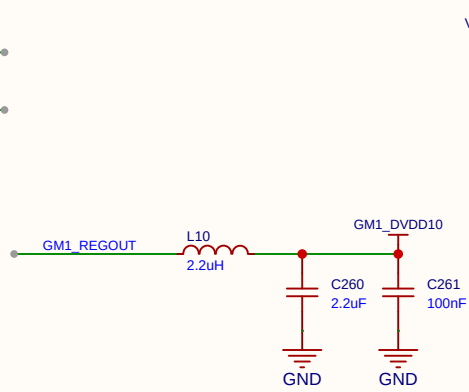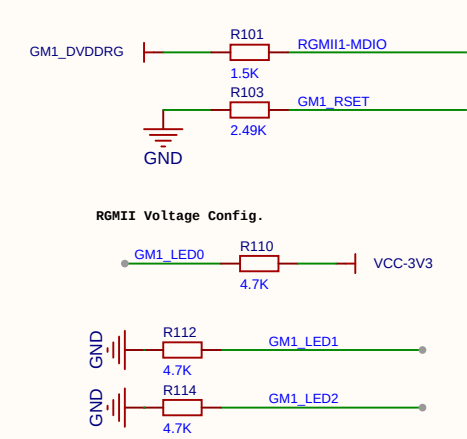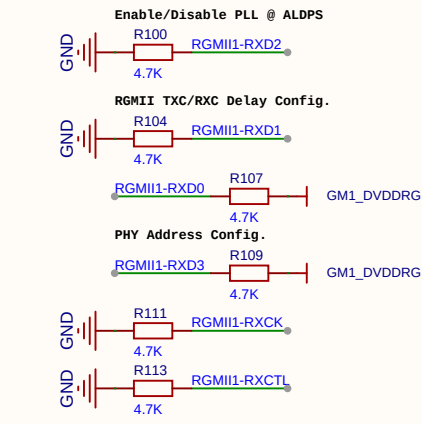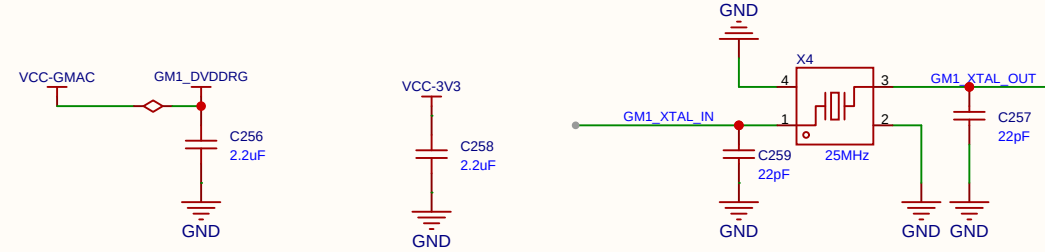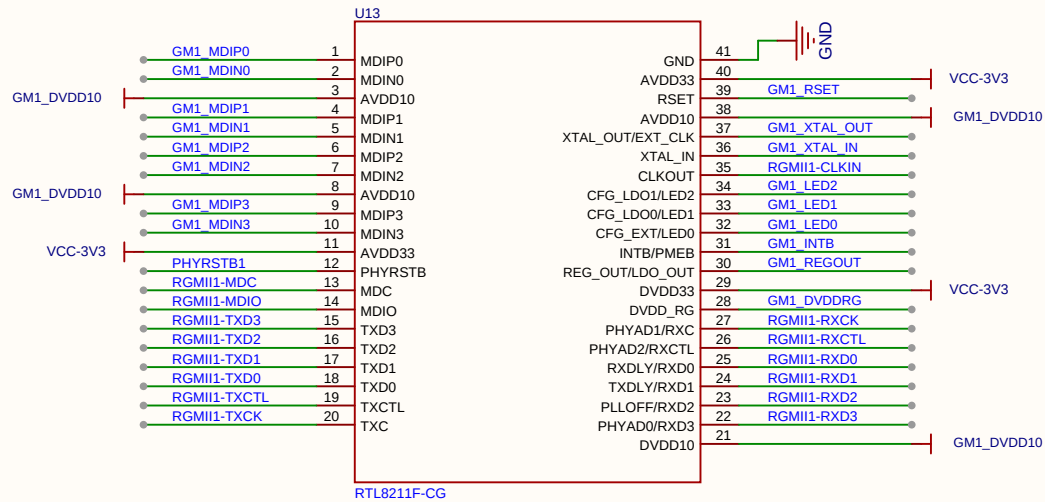

TITLE: T527 MicroPC			REV: 1.0	
Company: Nopiskl		Sheet: 12		Total: 13
Date: 2026-06-18		Drawn By: Nopiskl		

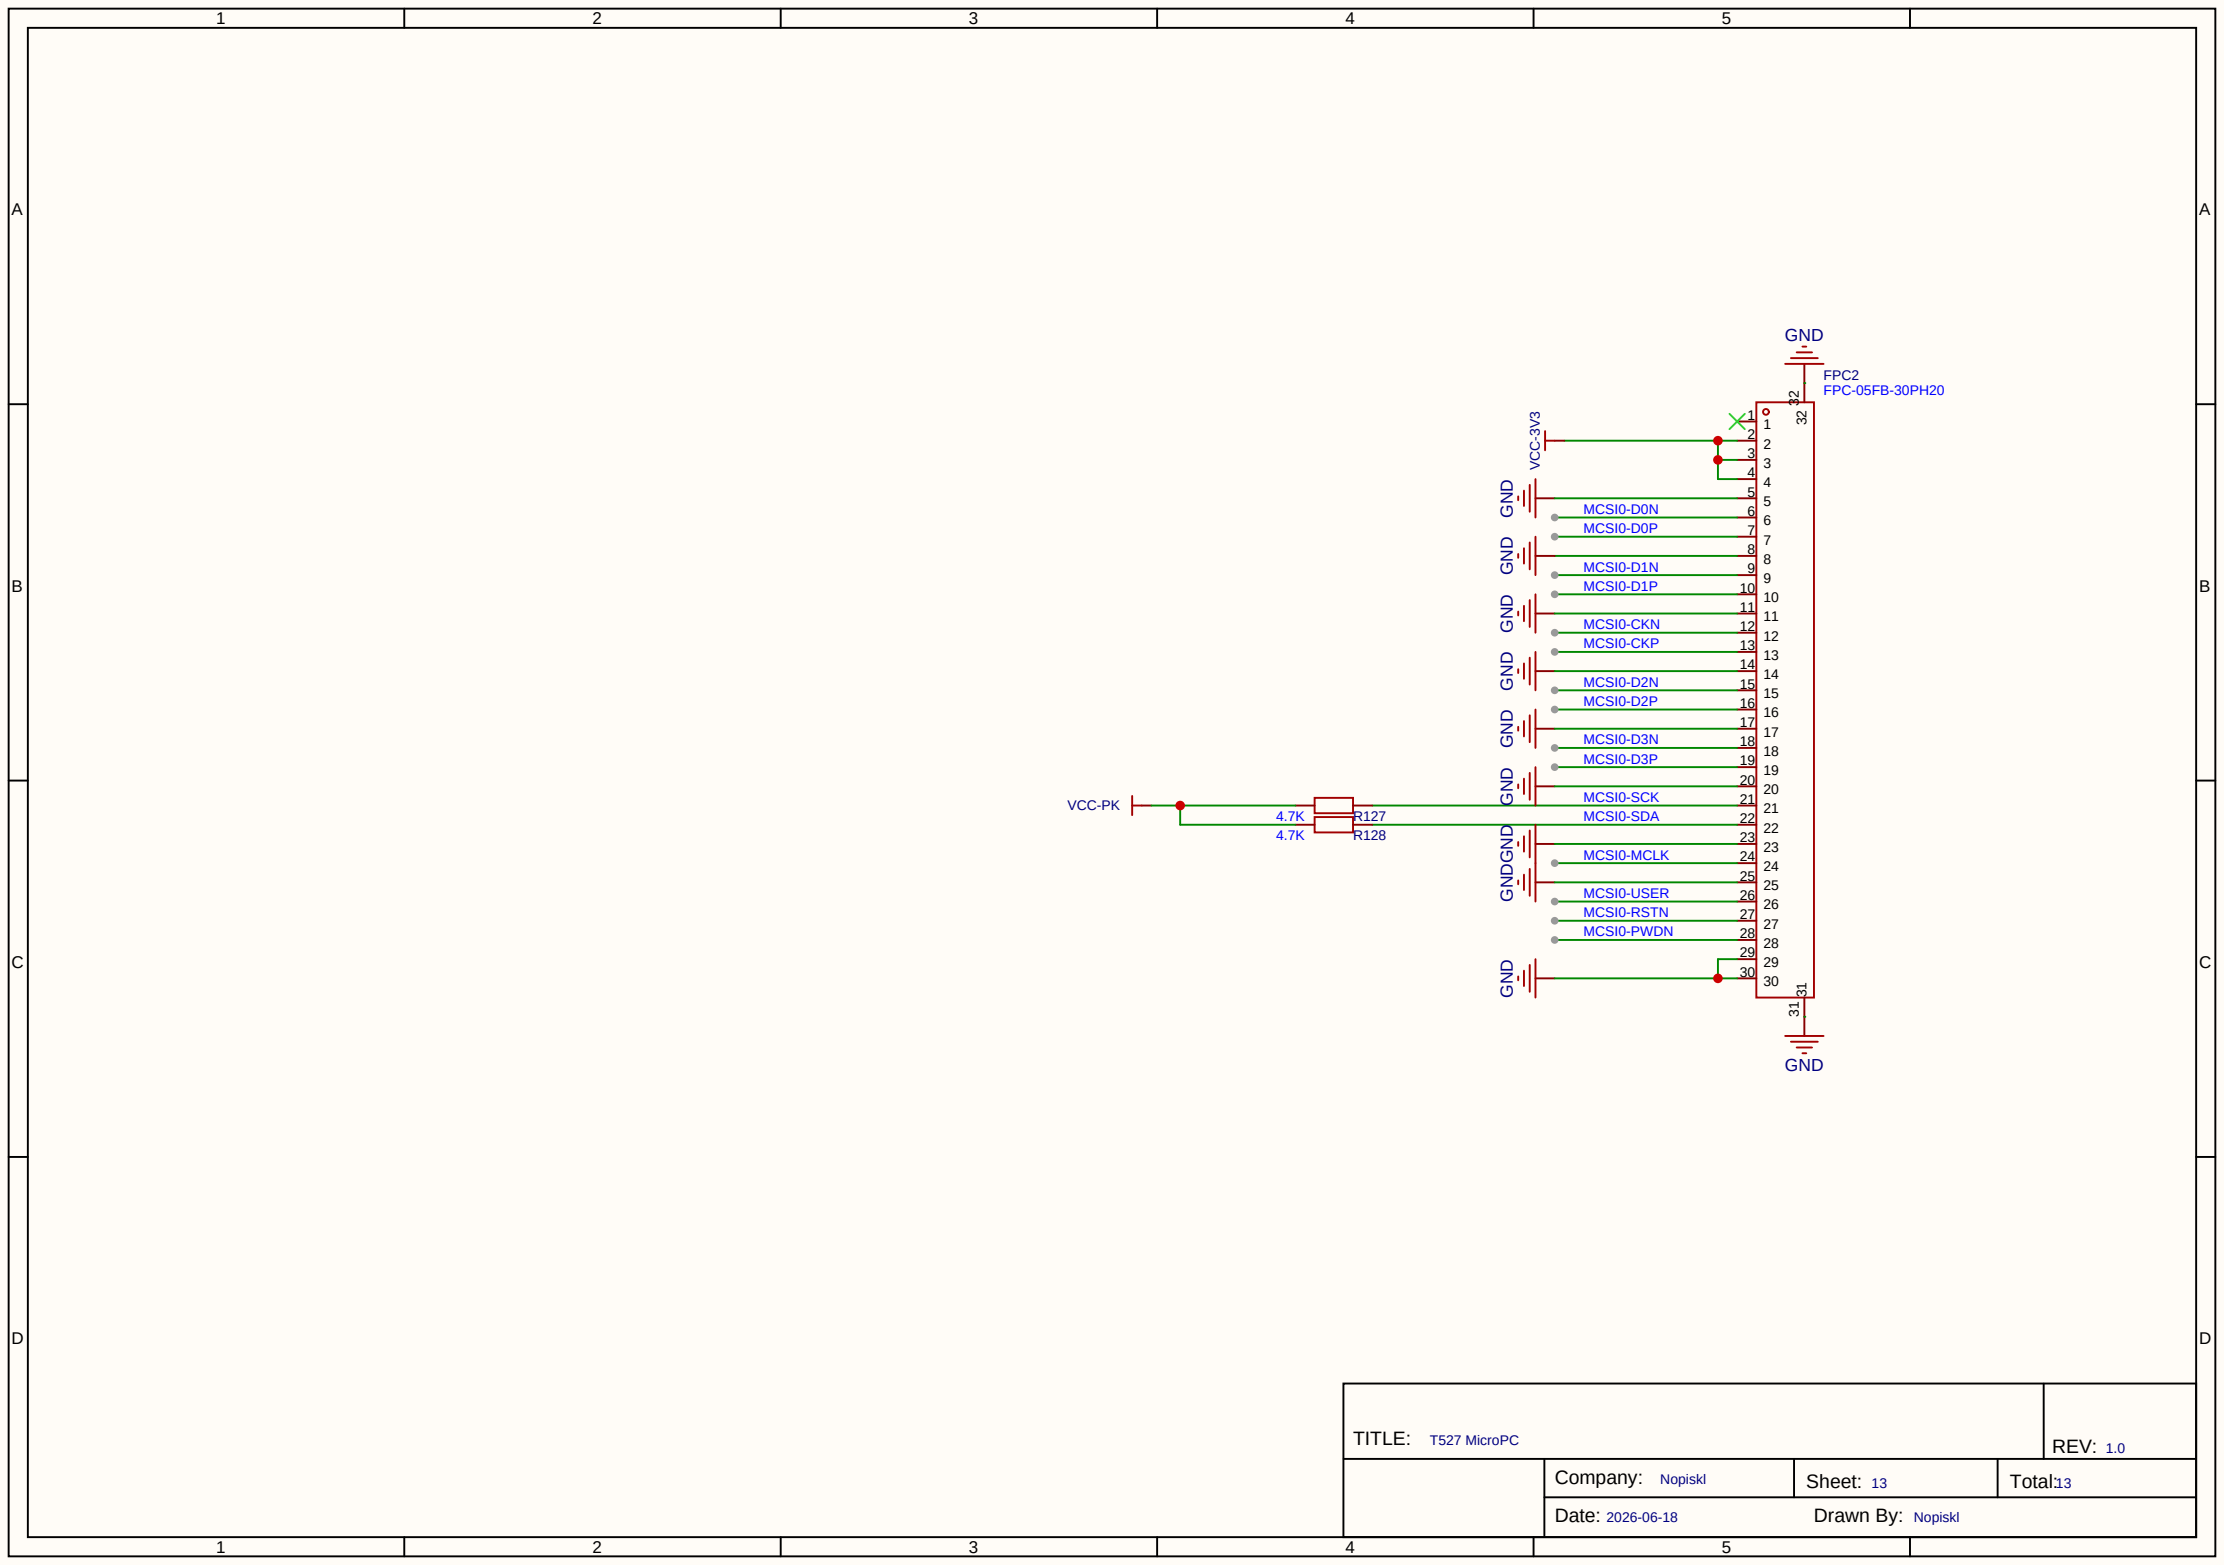

TITLE: T527 MicroPC			REV: 1.0
	Company: Nopiskl	Sheet: 13	Total:13
	Date: 2026-06-18 Drawn By: Nopiskl		