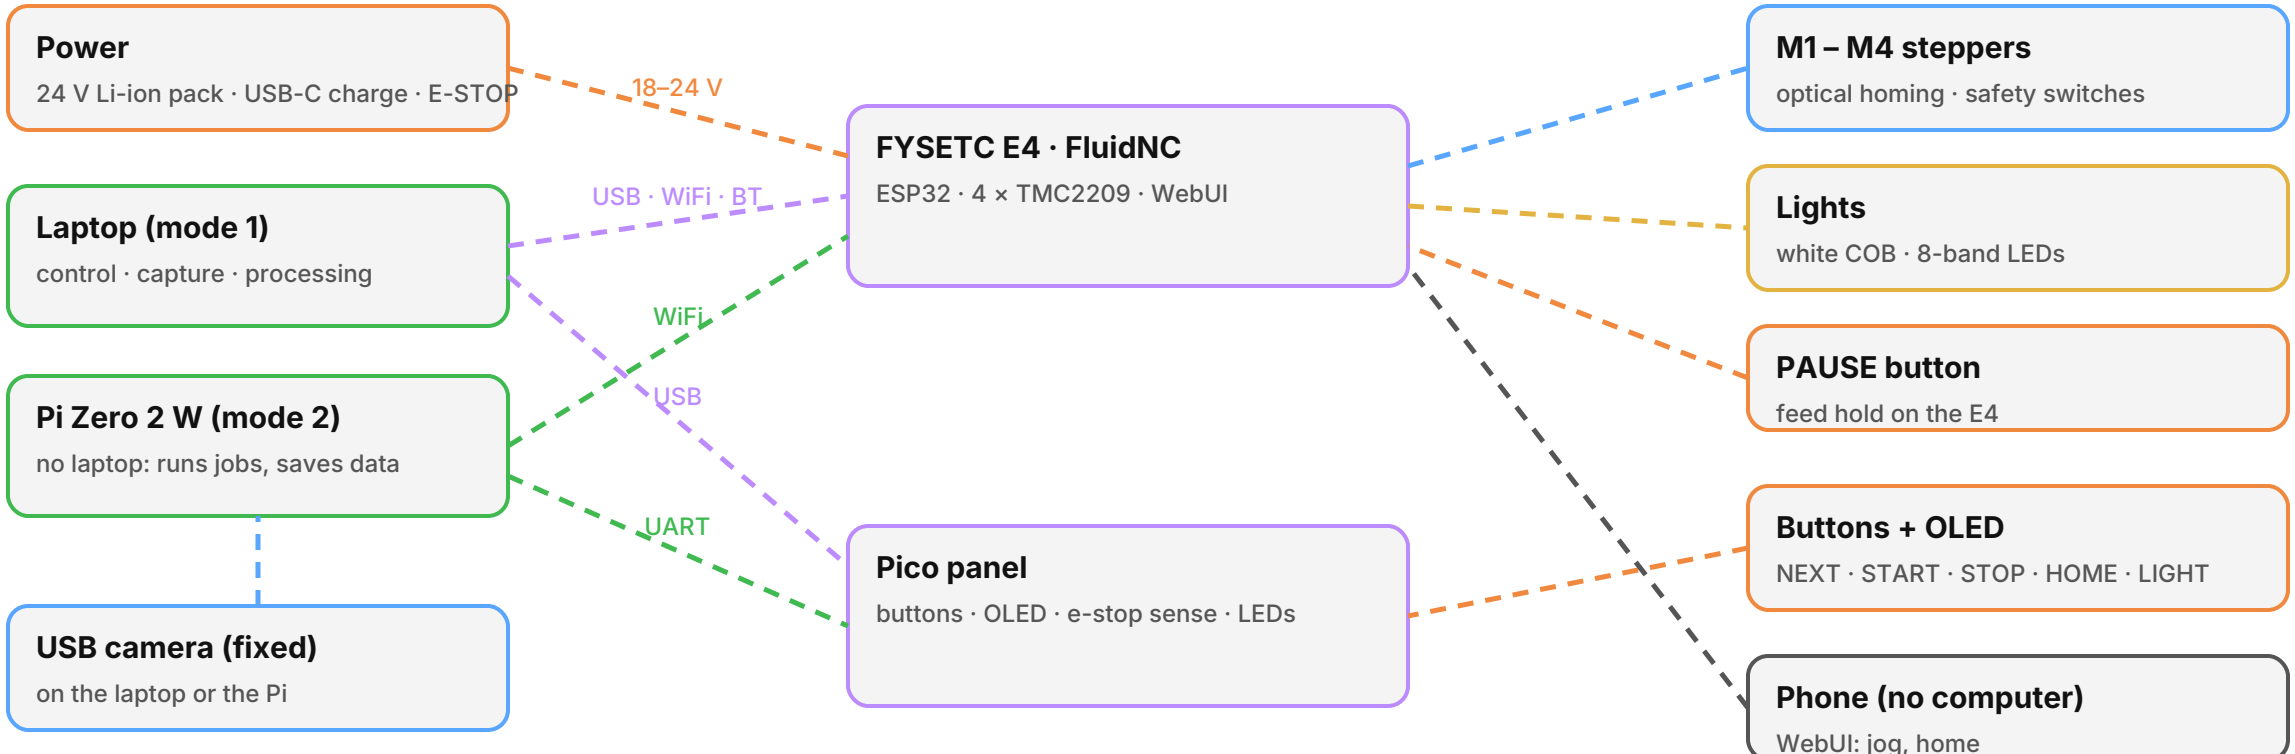
Power
24 V Li-ion pack · USB-C charge · E-STOP
Laptop (mode 1)
control · capture · processing
Pi Zero 2 W (mode 2)
no laptop: runs jobs, saves data
USB camera (fixed)
on the laptop or the Pi
18–24 V
USB · WiFi · BT
WiFi
USB
UART
FYSETC E4 · FluidNC
ESP32 · 4 × TMC2209 · WebUI
Pico panel
buttons · OLED · e-stop sense · LEDs
M1 – M4 steppers
optical homing · safety switches
Lights
white COB · 8-band LEDs
PAUSE button
feed hold on the E4
Buttons + OLED
NEXT · START · STOP · HOME · LIGHT
Phone (no computer)
WebUI: jog, home