




1. USB-C charge input + Li-Po charger (MCP73831, 213 mA)

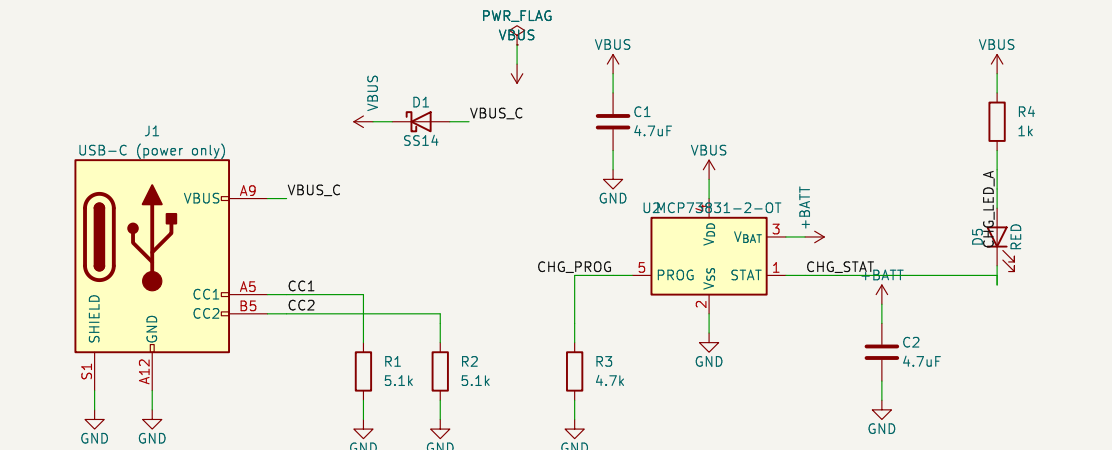


2. Battery, arming switch, OR-ing diode

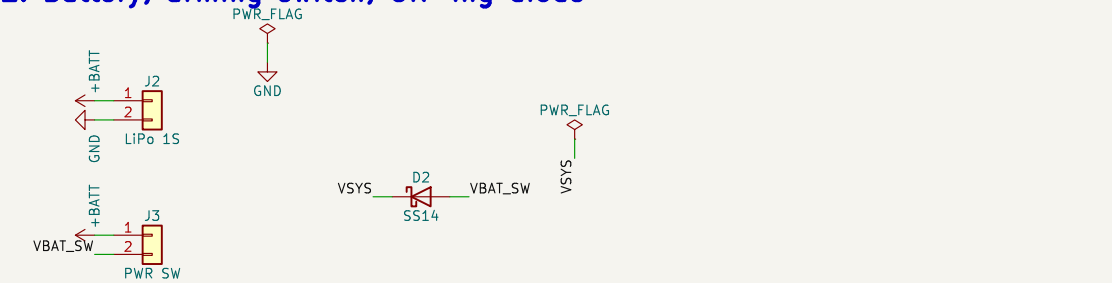


3. 3.3 V sensor rail (AP2112K, firmware-switchable) + battery sense

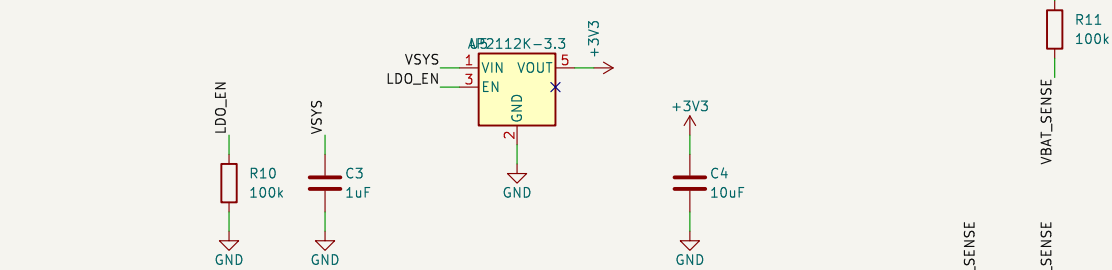


4. Status LED and beeper

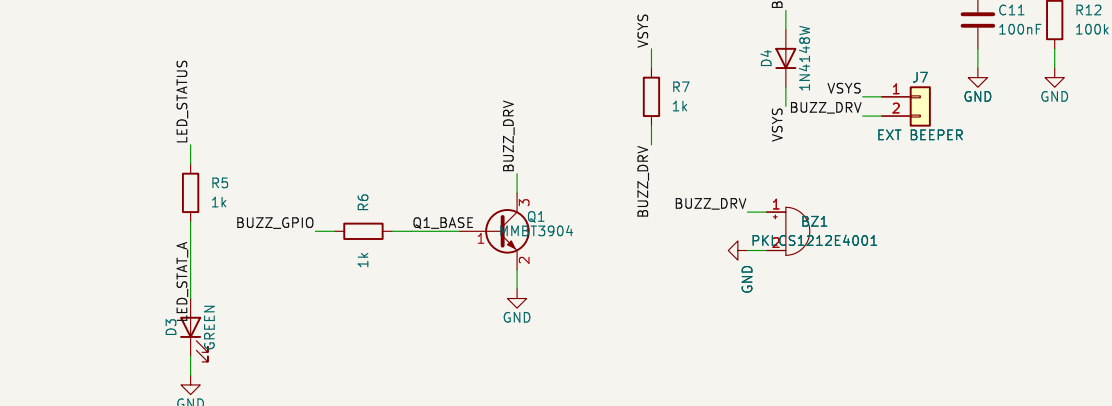


5. Raspberry Pi Pico (RP2040)

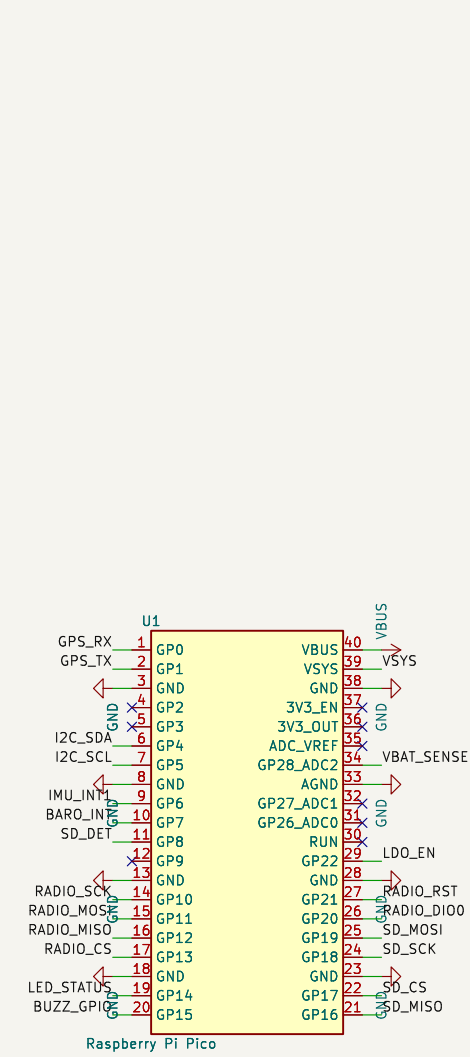


7. Expansion: LoRa radio (exp. 31) + GPS

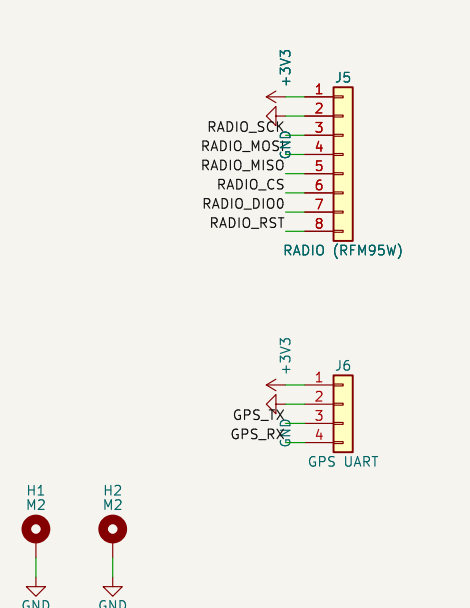

6. Sensors on I2C0 (400 kHz): LSM6DSO32 0x6A, BMP390 0x77

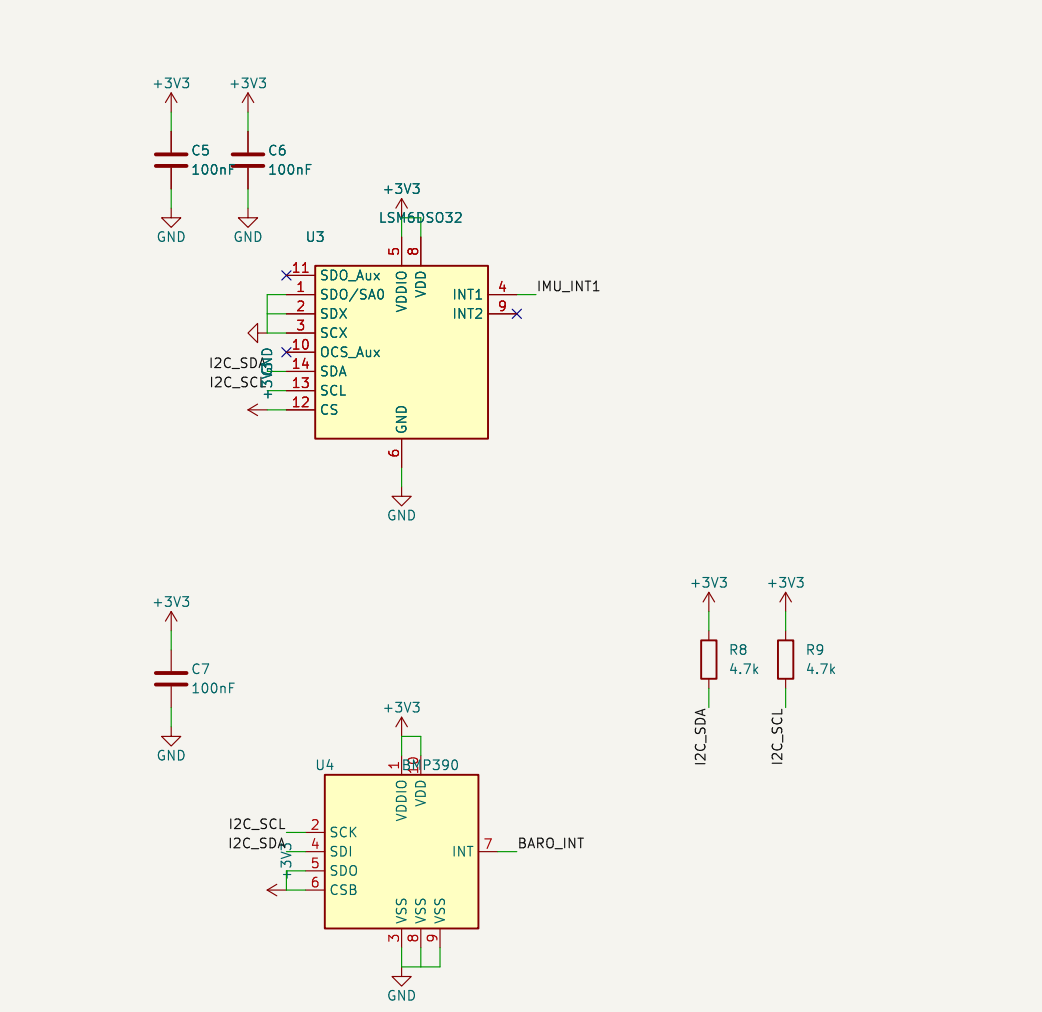

8. microSD in SPI mode (SPI0)

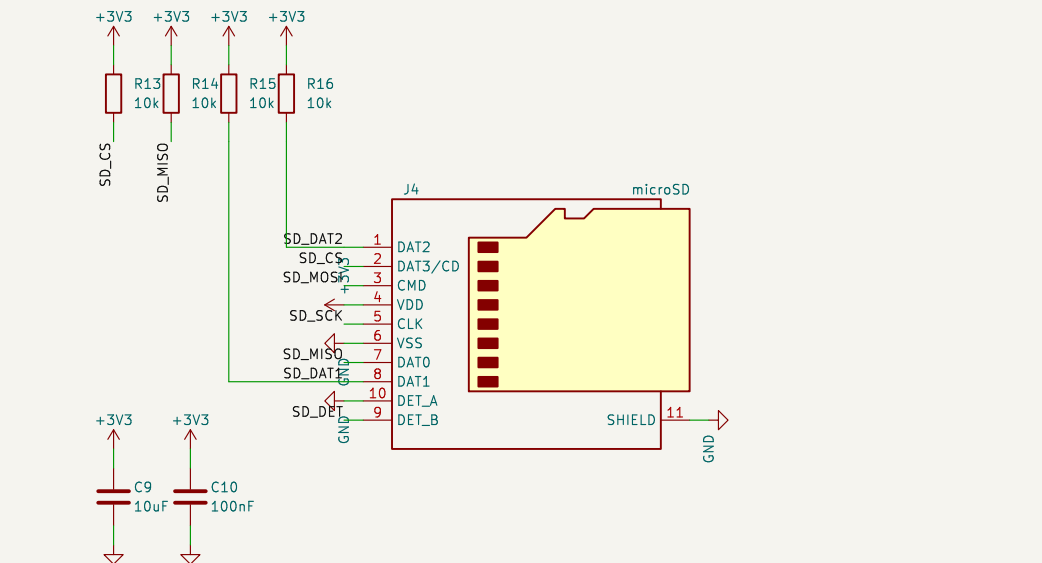

Data logger only: this board has NO pyrotechnic/deployment outputs. Use a certified commercial altimeter for recovery events (see experiment 40).