Obstacle avoidance and target acquisition with an event-based camera on a neuromorphic chip

Alexander Dietmüller & Hermann Blum
INILabs
ETH Zürich

October 2016

Introduction

Navigation through an unknown environment is a standard problem in robotics and includes target acquisition and obstacle avoidance. The wide variety of solutions depends on the choice of sensors and on the computing architecture.

If a map of the environment is known, target acquisition amounts to the problem of planning an optimal route from the starting to the target position on the map. If the map of the environment is not known, the problem of simultaneous localisation and mapping (SLAM) is considered. In reactive approaches to navigation, the robot updates its trajectory depending on the current readings of its sensors, without planning the whole route in advance. In these approaches, the robot stays flexible and quickly adapts to changes in the environment, e.g. the moving obstacles. Potential field and dynamical systems approaches are two reactive approaches to robotic navigation. The dynamical systems approach has been proven to be an effective low level, reactive solution for obstacle avoidance and target acquisition [Bicho et al., 1998].A particular, neurally-inspired flavour of the dynamical systems approach – the Dynamic Neural Fields (DNF) framework – has been useful in the design of autonomous cognitive robots [Erlhagen and Bicho, 2006]. In particular, for robot navigation, DNFs were used to hold representation of the direction towards the target in working memory [Bicho et al., 2000].

In reactive approaches, information about the obstacles and the target has to be updated based on the sensor readings faster than the relaxation time constant of the dynamics. Thus, using the biologically inspired Dynamic Vision Sensor (DVS) [Lichtsteiner et al., 2008] offers an advantage of real-time (very fast) processing of sensory information, enabling reactive navigation at high speed. The DVS can be used as direct input to the DNFs [Sandamirskaya and Conradt, 2013] In this project, we will enable fast processing of the DVS events for detection of obstacles and the target by implementing a DNF-like architecture in neuromorphic hardware, enabling real-time processing of the incoming spikes and minimising delays. The work of Frising [Frising, 2016] has validated that this approach is suitable for the desired task.

The neuromorphic VLSI implementations of spiking neurons offer low power consumption and real-time processing [Indiveri et al., 2011]. The neuromorphic Re-configurable OnLine Learning System (ROLLS) [Qiao et al., 2015] developed at INI will be the core platform, which, combined with the DVS, forms a fast and low-power consuming architecture for autonomous robots. We may additionally use digital designs, which offer greater flexibility and more neurons.

Objective

This work will combine basic functionalities like obstacle avoidance and target acquisition with a decision-making using DNFs in a small spiking neural network. The robot will therefore be able to move around an obstacle, keep the angular position of the target in memory, and return to the target acquisition task after the obstacle avoidance maneuver. We will test the target acquisition architecture with a localised target and a line, which the robot will follow.

The system will be optimized towards fast and fluent action by using the DVS sensor and the ROLLS chip. This work will explicitly not focus on more complex processing of the DVS input signal (e.g., object recognition) as well as hardware development. In the following, we describe the different project phases and objectives in detail.

First Phase: Exploring the platforms and framework

We will first use the framework by Michel Frising to get familiar with the hardware (ROLLS and CXQUAD chip, DVS camera) and software frameworks and interfaces (cAER, aerctl, NCSRobotLib, etc.) and combine the basic solutions of target acquisition and obstacle avoidance. The NCSRobotLib offers a basic software framework of "devices" (event emitters) and "listeners", which implement different controllers and communication interfaces between devices. We will consider using Qt and ROS frameworks to enable communication between different devices, preferring the most "light-weight" solution which may be embedded on a mobile computing platform. This work will be performed using the pushbot platform. The pushbots are small robots equipped with a DVS camera. [Figure 1] [Pushbot, 2016].

Second Phase: Attractors, Obstacle Avoidance & DNF

First of all, we will improve the target representation of Frising's project, in which a discrete discrimination between "left", "right" and "center" was
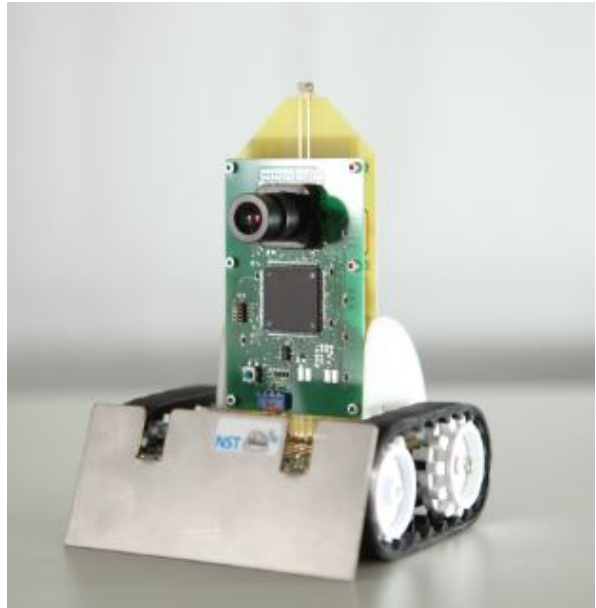

Figure 1: The pushbot platform developed by Prof. Jörg Conradt and team at the Neuroscientific System Theory group of the Technical University of Munich

used, and transform this into a continuous representation of the target position. Subsequently, we will add a "high level" decision network (with DNF) to decouple target following and obstacle avoidance behaviors and to enable a decision-making process about deviation from the trajectory towards the target. This will include keeping the target position memorized while performing obstacle avoidance. The obstacle avoidance, implemented by Frising, amounts to clutter detection in the lower part of the DVS image, and will be improved in this work.

Third phase: Robotic experiments and documentation

Finally, we will perform experiments in a simplified, but close to natural, office environment, recoding the robot's trajectory and quantitatively validating obstacle avoidance and target acquisition behaviors.

The results of the project will be documented in a final report.

Time schedule

Planning and Preparation (2 Weeks)

1. Reading
2. Project proposal and discussion

First phase (3 Weeks)

3. Familiarisation with neuromorphic hardware, DVS-based vision and frameworks
4. Combining existing obstacle avoidance and target acquisition
5. Finishing first phase, experiment recording and documentation

Second phase (6 Weeks)

6. Refining target acquisition (continuous position)
7. Refining obstacle avoidance (if necessary)
8. Design of DNF networks
9. Decision making between target acquisition and obstacle avoidance
10. Keeping target position in memory, position dependent on motor movement
11. time buffer, potentially also used for speed and power optimization

Third Phase (3 Weeks)

12. perform experiments and recordings
13. Write report
14. Finalize report, time buffer

References

[Bicho et al., 1998] Bicho, E., Mallet, P., and Schoner, G. (1998). Using attractor dynamics to control autonomous vehicle motion. In *Industrial Electronics Society, 1998. IECON'98. Proceedings of the 24th Annual Conference of the IEEE*, volume 2, pages 1176–1181. IEEE.

[Bicho et al., 2000] Bicho, E., Mallet, P., and Schöner, G. (2000). Target representation on an autonomous vehicle with low-level sensors. *The International Journal of Robotics Research*, 19(5):424–447.

[Erlhagen and Bicho, 2006] Erlhagen, W. and Bicho, E. (2006). The dynamic neural field approach to cognitive roboticspart of the 3rd neuro-it and neuroengineering summer school tutorial series. *Journal of neural engineering*, 3(3):R36.

[Frising, 2016] Frising, M. (2016). An embedded neuromorphic computing platform for cognitive agents. Institute for Neuroinformatics, ETH Zürich, Universität Zürich.

[Indiveri et al., 2011] Indiveri, G., Linares-Barranco, B., Hamilton, T. J., Van Schaik, A., Etienne-Cummings, R., Delbruck, T., Liu, S.-C., Dudek, P., Häfliger, P., Renaud, S., et al. (2011). Neuromorphic silicon neuron circuits. *Frontiers in neuroscience*, 5:73.

[Lichtsteiner et al., 2008] Lichtsteiner, P., Posch, C., and Delbruck, T. (2008). A 128× 128 120 db 15 μs latency asynchronous temporal contrast vision sensor. *IEEE journal of solid-state circuits*, 43(2):566–576.

[Pushbot, 2016] Pushbot (2016). Pushbot robotic platform. `http://inilabs.com/products/pushbot/`. Accessed: 2016-10-16.

[Qiao et al., 2015] Qiao, N., Mostafa, H., Corradi, F., Osswald, M., Stefanini, F., Sumislawska, D., and Indiveri, G. (2015). A reconfigurable on-line learning spiking neuromorphic processor comprising 256 neurons and 128k synapses. *Frontiers in neuroscience*, 9:141.

[Sandamirskaya and Conradt, 2013] Sandamirskaya, Y. and Conradt, J. (2013). Learning sensorimotor transformations with dynamic neural fields. In *International Conference on Artificial Neural Networks*, pages 248–255. Springer.