
# NOT STOCK CAN 1.85: power and CAN board behind the Waveshare ESP32-S3-Touch-LCD-1.85


## Input: fuse, reverse polarity, load dump





## CAN transceiver, ESD, termination (JP1 open: the car's bus is terminated already)

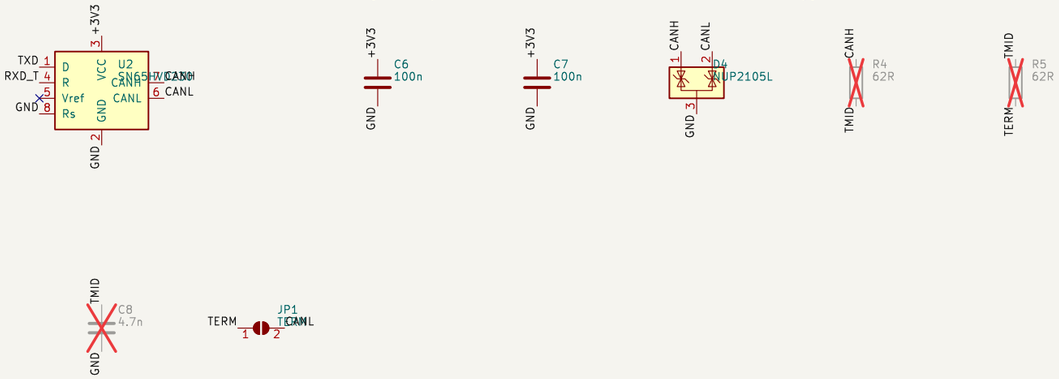


## 12 V -> 3.75 V for the display's battery input

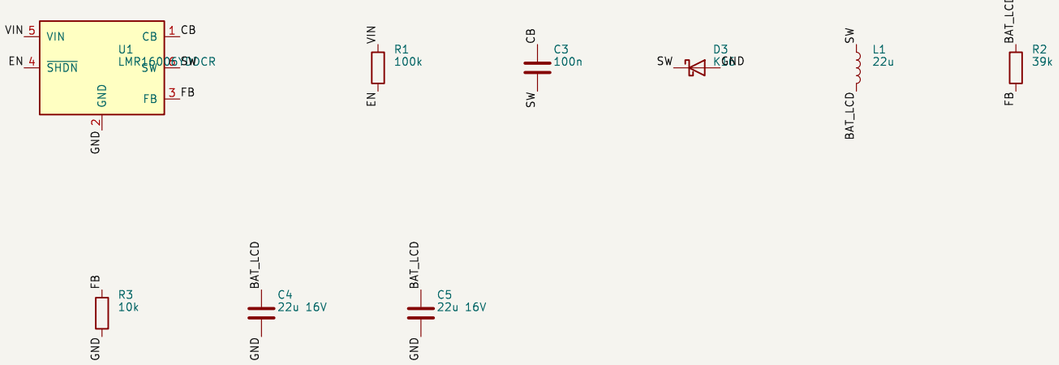


## To the display ESP32-S3-Touch-LCD-1.85: UART socket (its own cable, free ends soldered to J2) and battery socket (wires, MX




## Mounting: the display's M2 holes




## Supply flags




12 V -> 3.75 V, CAN (SN65HVD230) for the round gauge

Sheet: /
File: notstock-can185.kicad_sch

**Title: NOT STOCK CAN 1.85**

| Size: A3 | Date: | **Rev: 6** |
|---|---|---|
| KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4 | | Id: 1/1 |