



NOT STOCK CAN 1.85: power and CAN board behind the Waveshare ESP32-S3-Touch-LCD-1.85


Input: fuse, reverse polarity, load dump

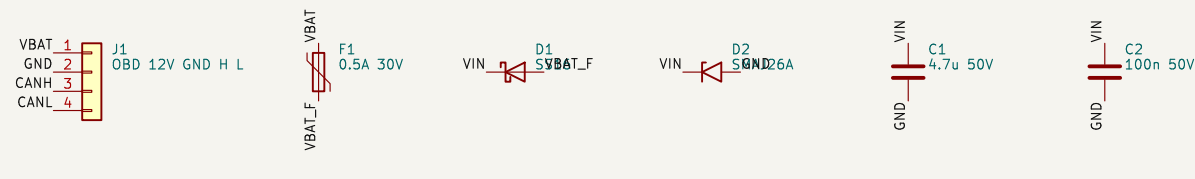


CAN transceiver, ESD, termination (JP1 open: the car's bus is terminated already)

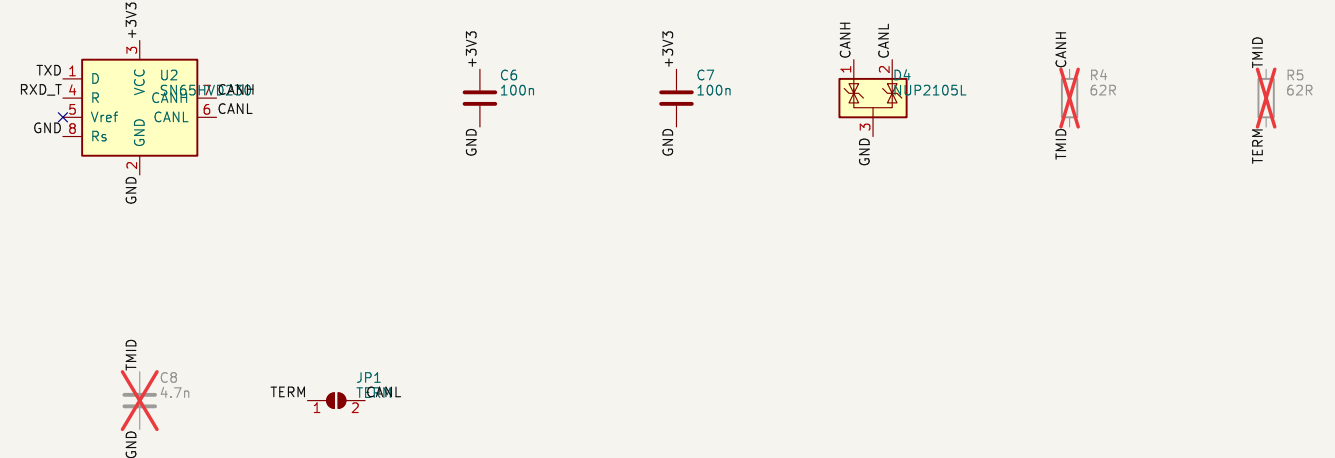

12 V $\rightarrow$ 3.75 V for the display's battery input

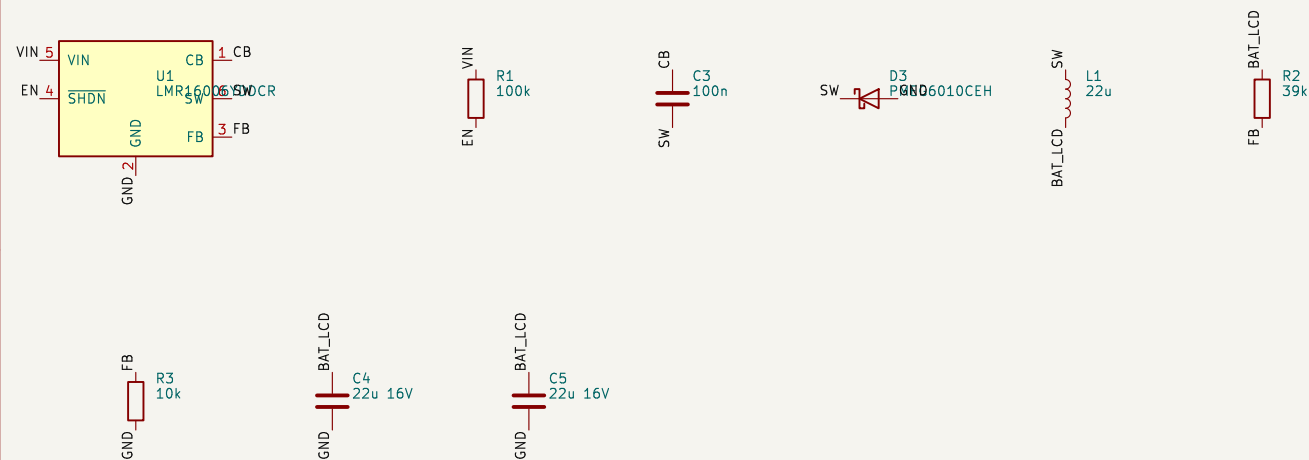

To the display ESP32-S3-Touch-LCD-1.85: UART socket (SH 1.0 cable, 1:1) and battery socket (wires, MX1.25 plug; bridge the

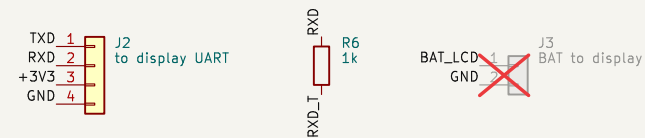

Mounting: the display's M2 holes



Supply flags



12 V $\rightarrow$ 3.75 V, CAN (SN65HVD230) for the round gauge

Sheet: /
File: notstock-can185.kicad_sch

Title: NOT STOCK CAN 1.85

Size: A3	Date:
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4	

Rev: 4

id: 1/1