



**NOT STOCK CAN 1.85: power and CAN board behind the Waveshare ESP32-S3-Touch-LCD-1.85**


**Input: fuse, reverse polarity, load dump**

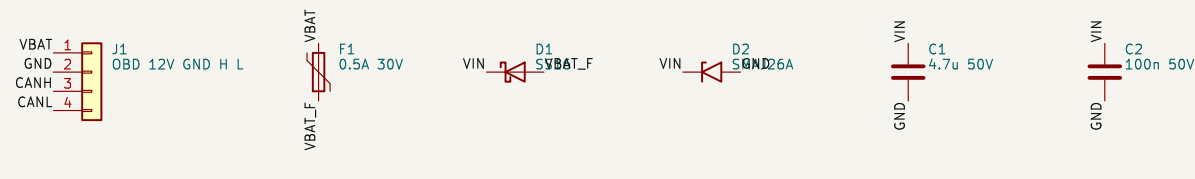


CAN transceiver, ESD, termination (JP1 open: the car's bus is terminated already)

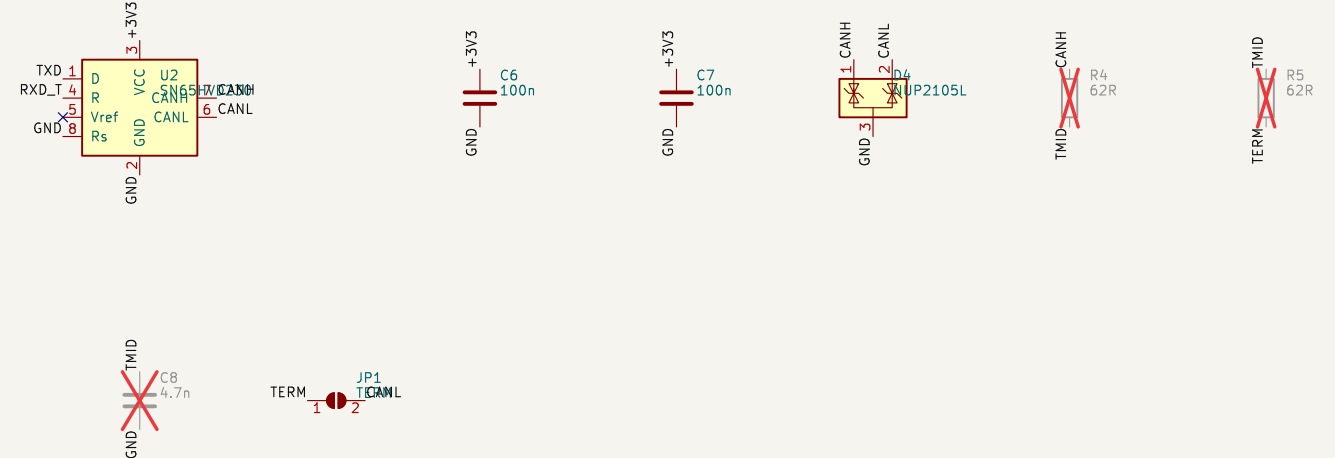

12 V  $\rightarrow$  3.75 V for the display's battery input

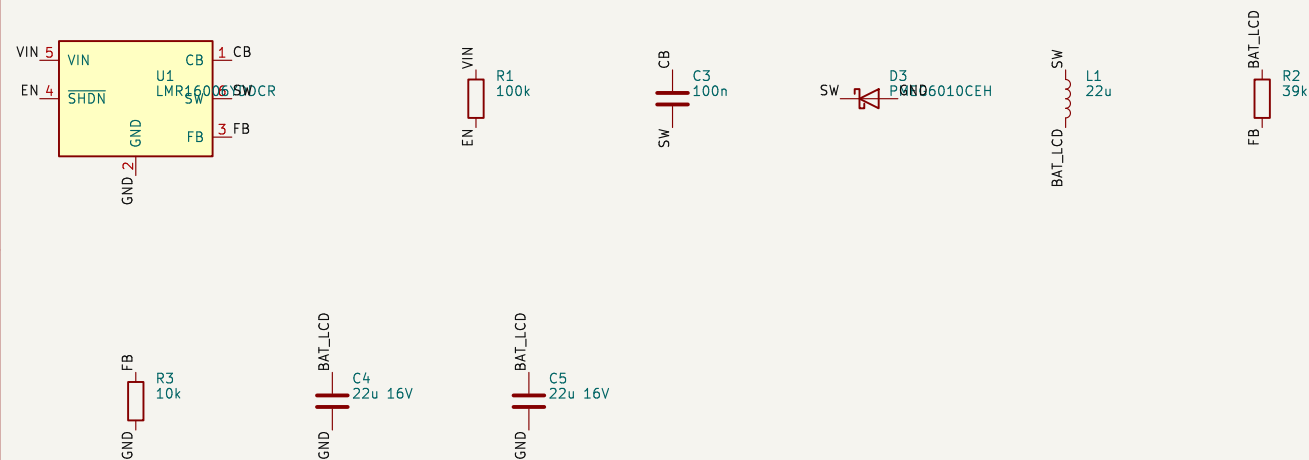

To the display ESP32-S3-Touch-LCD-1.85: UART socket (its own cable, free ends soldered to J2) and battery socket (wires, M)

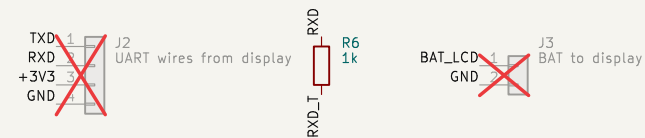

### Mounting: the display's M2 holes



## Supply flags



12 V  $\rightarrow$  3.75 V, CAN (SN65HVD230) for the round gauge

Sheet: /  
File: notstock-can185.kicad\_sch

**Title: NOT STOCK CAN 1.85**

|                                            |       |
|--------------------------------------------|-------|
| Size: A3                                   | Date: |
| KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4 |       |

Rev: 4

id: 1/1