



NOT STOCK CAN 1.85: power and CAN board behind the Waveshare ESP32-S3-Touch-LCD-1.85


Input: fuse, reverse polarity, load dump

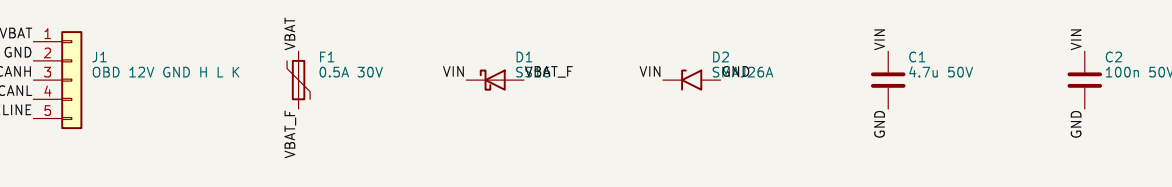


CAN transceiver, ESD, termination (JP1 open: the car's bus is terminated already)

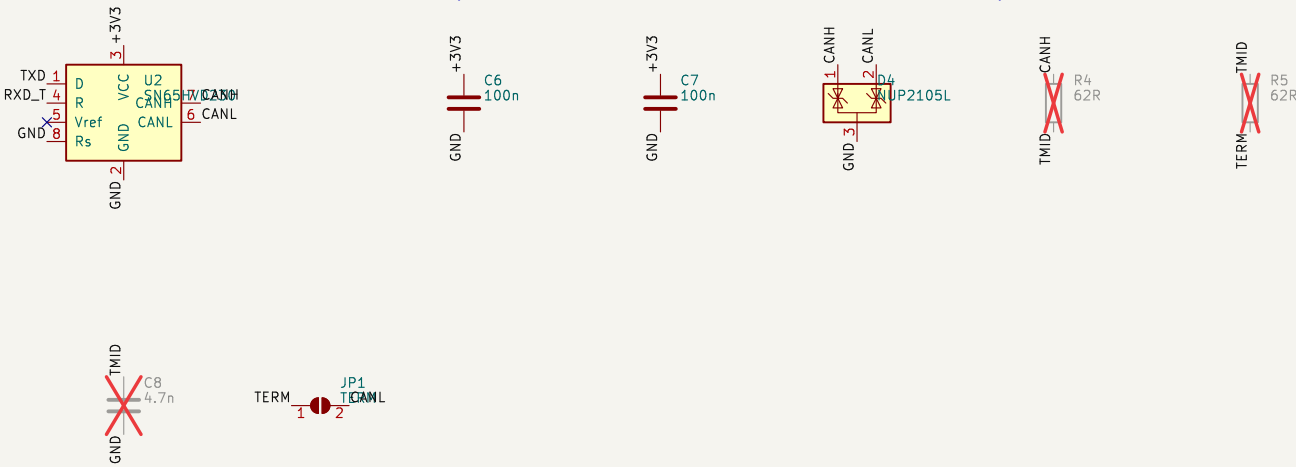

12 V -> 3.75 V for the display's battery input, on with the key (K-line)

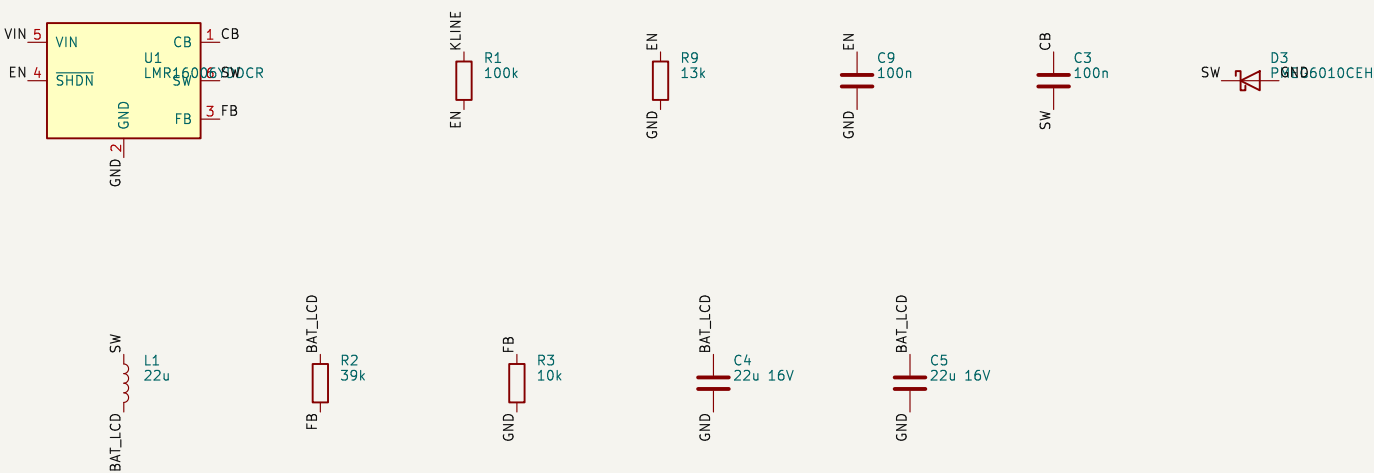

To the display ESP32-S3-Touch-LCD-1.85: UART socket (its own cable, free ends soldered to J2) and battery socket (wires, M2)

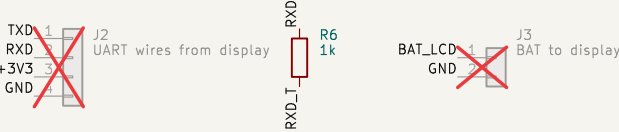

Mounting: the display's M2 holes



Supply flags



12 V -> 3.75 V, CAN (SN65HVD230) for the round gauge		
Sheet: / File: notstock-can185.kicad_sch		
Title: NOT STOCK CAN 1.85		
Size: A3	Date:	Rev: 5
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		
Id: 1/1		