
NOT STOCK CAN 1.32: power and CAN board behind the Waveshare ESP32-S3-Touch-AMOLED-1.32


Input: fuse, reverse polarity, load dump



CAN transceiver, ESD, termination (JP1 open: the car's bus is terminated already)

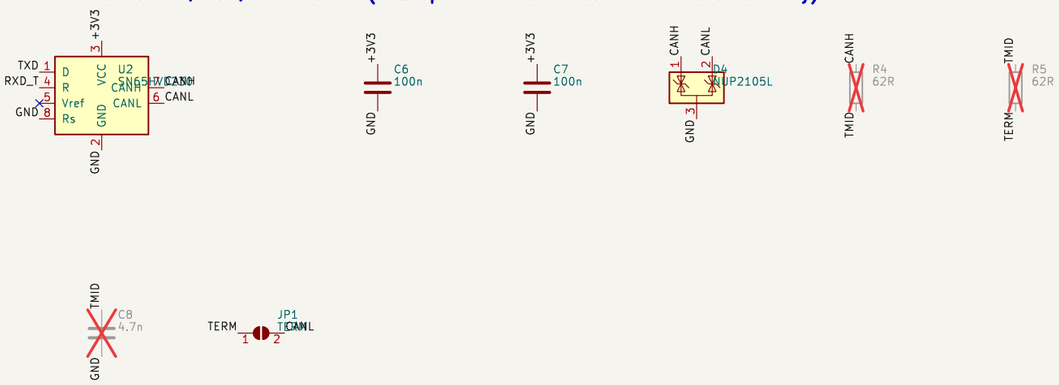

12 V -> 5 V for the display's VSYS

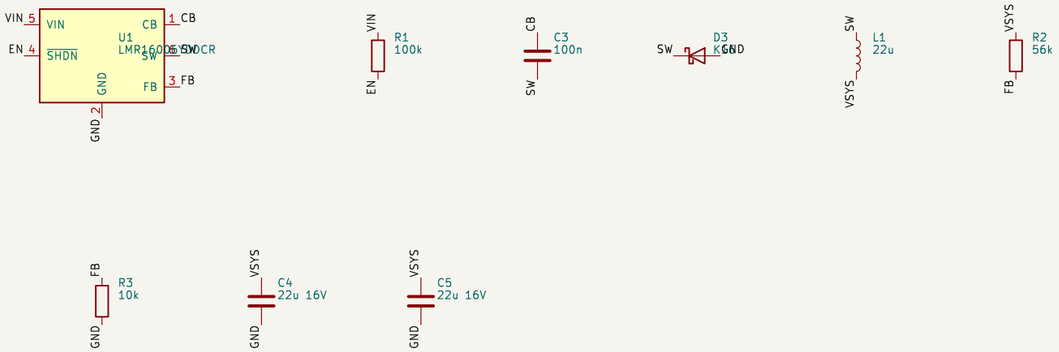

To the display ESP32-S3-Touch-AMOLED-1.32: its 12-pin connector (its own cable, free ends of pins 1 2 3 5 6 soldered to J



Mounting: the display's M2 holes



Supply flags



12 V -> 3.75 V, CAN (SN65HVD230) for the round gauge

Sheet: /
File: notstock-can132.kicad_sch

Title: NOT STOCK CAN 1.32

Size: A3	Date:	Rev: 6
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 1/1