
IOT-stt-web-page

1- i used notepad++ to programm

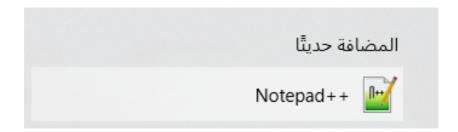

2-wrote the html code

```
nge.log 🗵 🔡 tts coverter.html 🗵 🔡 tts.css 🗵 🔡 new 1 🗵 🔡 tts.js 🗵
     <!DOCTYPE html>
    | <html lang="en">
   =<head>
     <meta charset="utf-8">
     <meta name="viewport" content="initial-scale=1.0, maximum-scale=1.0, user-scalable=1">
     <title>Home</title>
     <link rel="stylesheet" type="text/css" href="C:\Users\huawei\Documents\tts file\tts.css">
   =|<body>
          <div class="voice_to_text">
             <h1>Speech to Text Converter</h1>
          <input name="" id="convert_text"></input>
          <button class="b2" id="click_to_record">Speech To Text</button>
          <div><button class="b1" id="c">connect</button></div>
17
18
19
       </div>
     <script type="text/javascript" src="C:\Users\huawei\Documents\tts file\tts.js"></script>
```

3-wrote CSS (for coloring and styling)

```
∃*,*:after,*:before{
    -webkit-box-sizing: border-box;
    -moz-box-sizing: border-box;
     -ms-box-sizing: border-box;
    box-sizing: border-box;
L)
⊟body (
     font-family: arial;
    font-size: 16px;
    margin: 0;
                                                                   □button {
    background: linear-gradient(to right bottom, #FFCOCB, #FF5A77);
    color: #000;
                                                                            padding: 12px 20px;
    display: flex;
                                                                        background: #FF4162;
   align-items: center;
   justify-content: center:
                                                                        border: 0;
   min-height: 100vh;
                                                                         color: #fff;
□.voice to text{
                                                                         font-size: 18px;
  width: 600px;
  text-align: center;
                                                                         cursor: pointer;
□h1{
                                                                        border-radius: 5px;
    color: #fff;
    font-size: 50px;
□#convert_text{
  width: 100%;
  height: 200px;
  border-radius: 10px;
  resize: none;
  padding: 10px;
   font-size: 20px;
  margin-bottom: 10px;
```

4-wrote JavaScript for STT function and connecting to the web serial

```
□click_to_record.addEventListener('click', function(){
2
         var speech = true;
 3
         window.SpeechRecognition = window.webkitSpeechRecognition;
         const recognition = new SpeechRecognition();
6
         recognition.interimResults = true;
8
         recognition.addEventListener('result', e => {
             const transcript = Array.from(e.results)
9
10
                 .map(result => result[0])
                  .map(result => result.transcript)
                  .join('')
13
             document.getElementById("convert text").innerHTML = transcript;
14
15
             console.log(transcript);
16
         });
17
         if (speech == true) {
19
             recognition.start();
21
22
```

5-connected the web serial using the codes that in the(https://web.dev/serial/) documenation (to connect the hardware device to the web) using javaScript

```
<script document.querySelector('b1').addEventListener('click', async () => {
 // Prompt user to select any serial port.
  const port = await navigator.serial.requestPort();
 await port.open({ baudRate: 9600 });
const reader = port.readable.getReader();
const textDecoder = new TextDecoderStream();
const readableStreamClosed = port.readable.pipeTo(textDecoder.writable);
const reader = textDecoder.readable.getReader();
// Listen to data coming from the serial device.
while (true) {
 const { value, done } = await reader.read();
 if (done) {
   // Allow the serial port to be closed later.
   reader.releaseLock();
   break;
 // value is a string.
 console.log(value);
 });
```


6-wrote a c++ code on arduino IDE

movemet | Arduino 1.8.19 (Windows Store 1.8.57.0)


File Edit Sketch Tools Help

```
movemet
void setup() {
```

```
serial.begin(9600);
pinmode (13, OUTPUT);
}
void loop() {
String data=Serial.readString();
if (data.index0f("right")>-1)
digitalWrite(13, HIGH);
delay(2000);
Serial.println(2);
delay(2000);
digitalWrite(13,LOW);
delay(1000);
 }
else if(data.index0f("left")>-1){
 digitalWrite(13, HIGH);
 Serial.println(1);
 else{
   digitalWrite(13,LOW);
 Serial.println(0);
 }
}
```

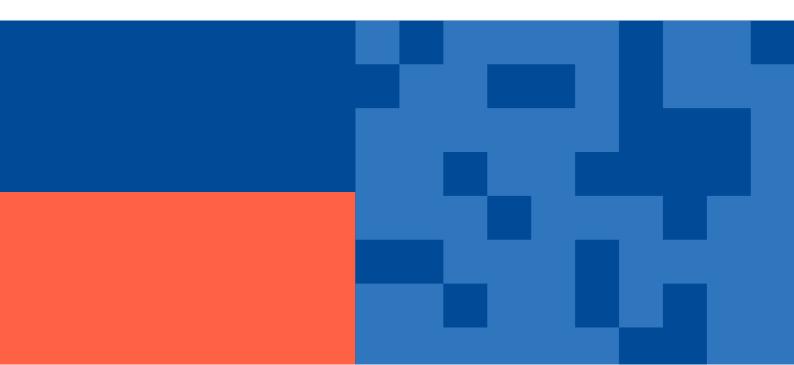

the interface:

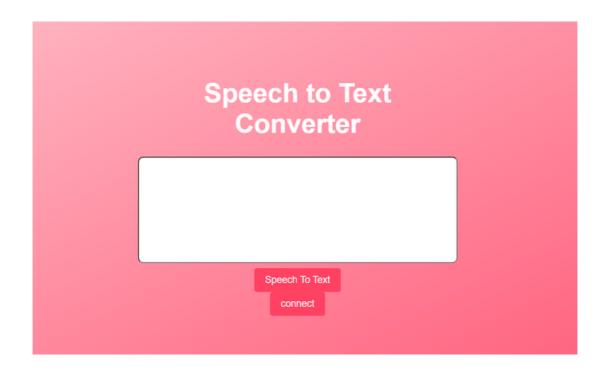

speech to text button for converting STT connect button to connect the device to web page

