

123456

A

BANK 0

File: sheets/bank0.kicad_sch

DDR3

File: sheets/ddr3.kicad_sch

POWER

File: sheets/power.kicad_sch

CONNECTOR

File: sheets/connector.kicad_sch

PL IO

File: sheets/io.kicad_sch

PS MIO

File: sheets/mio.kicad_sch

C

D

Sheet: /
File: ZYNQ-SoM.kicad_sch

Title: ZYNQ-SoM

Size: A4

Date: 2026-09-09

KiCad E.D.A. 10.0.5

Rev: B

Id: 1/7

6

H101
MountingHole

H102
MountingHole

H103
MountingHole


H104
MountingHole


6

B


C

D

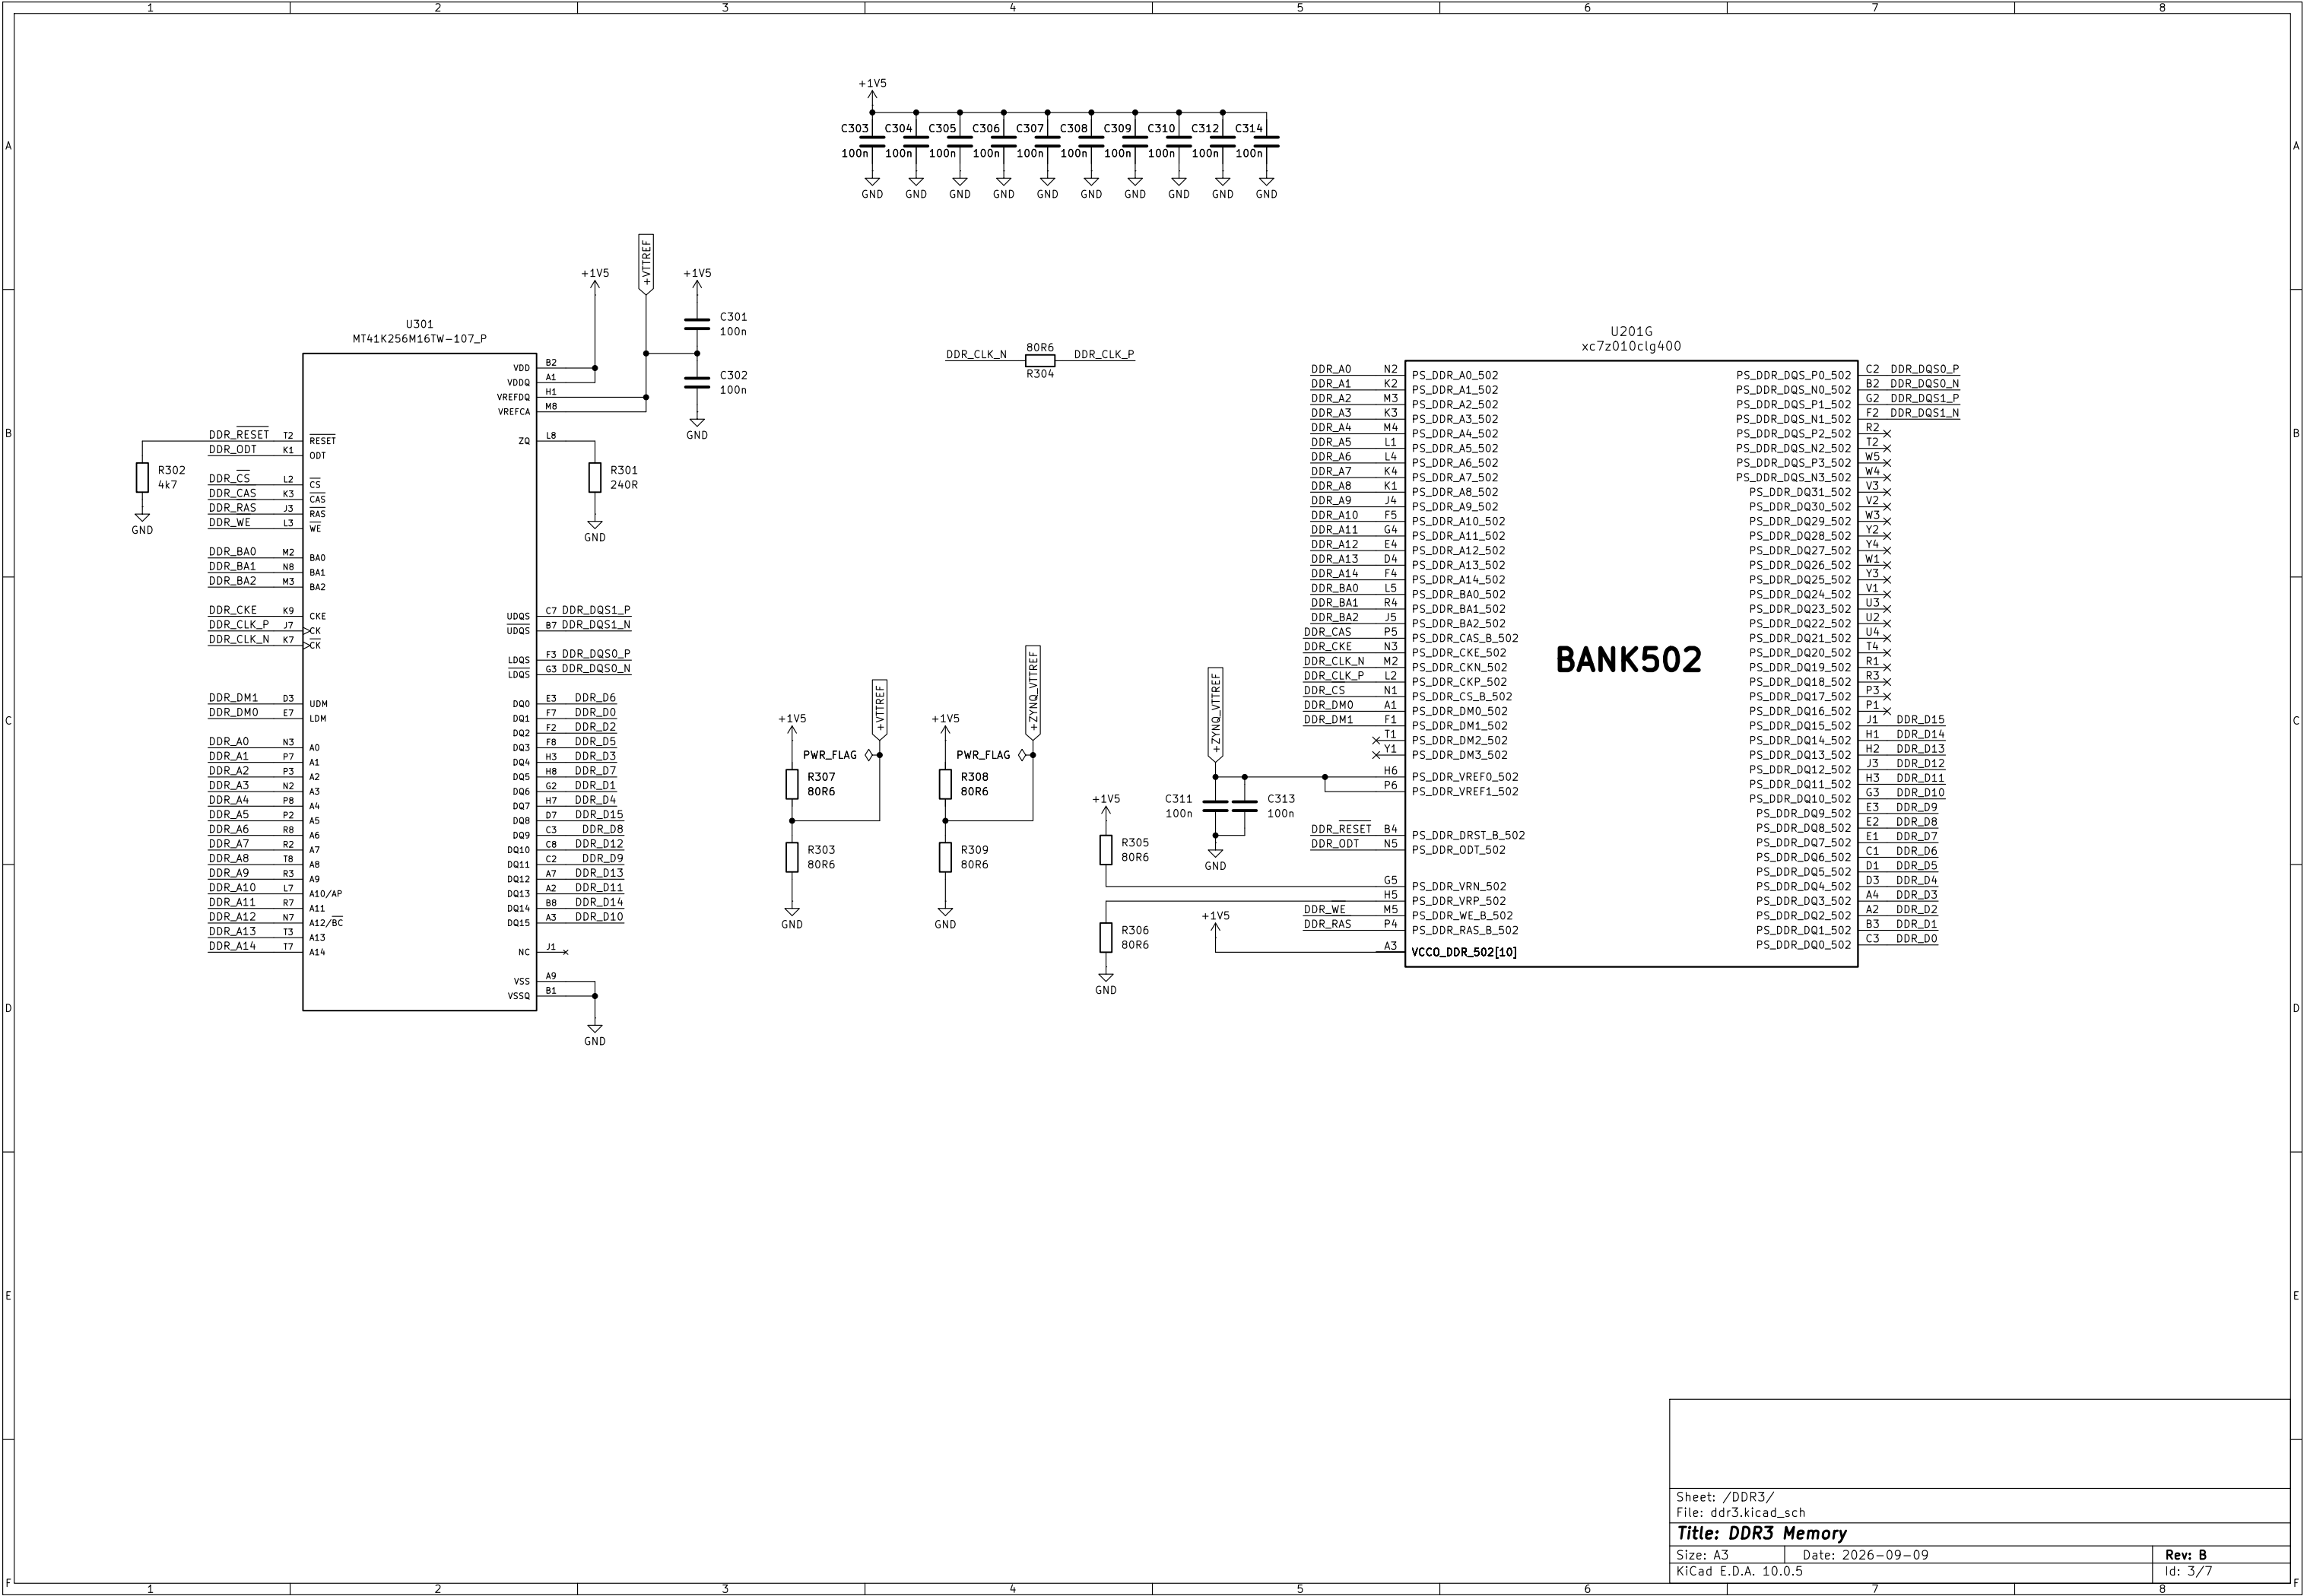

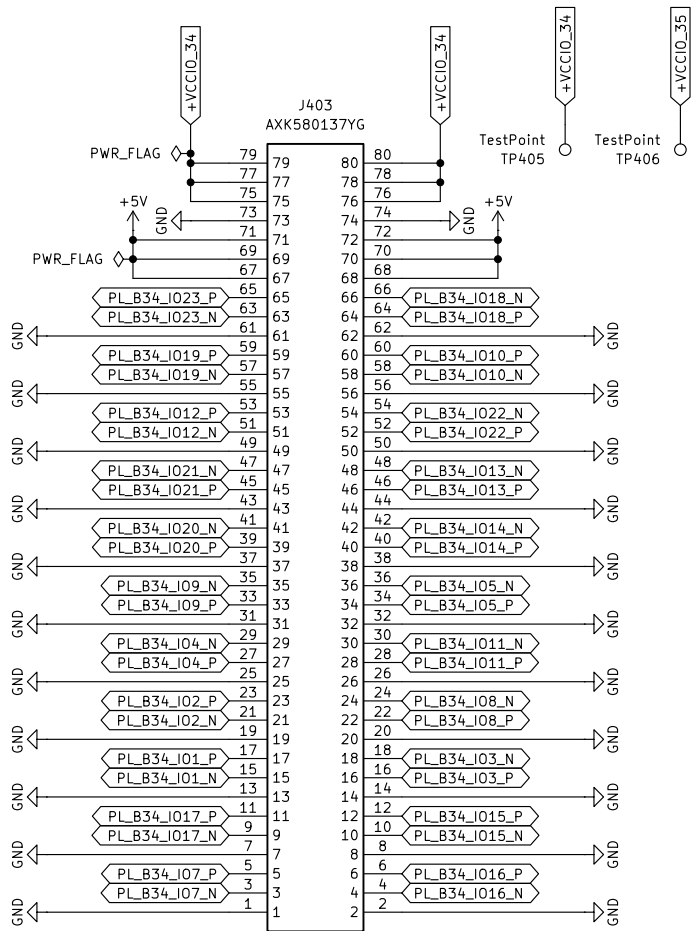

CARRIER REQUIREMENT:
 J403.16 = PUDC_B / PL_B34_I03_P.
 Carrier MUST tie this pin to
 +VCCIO_34 or GND with <=1k.
 Do not leave PUDC_B floating during
 configuration.

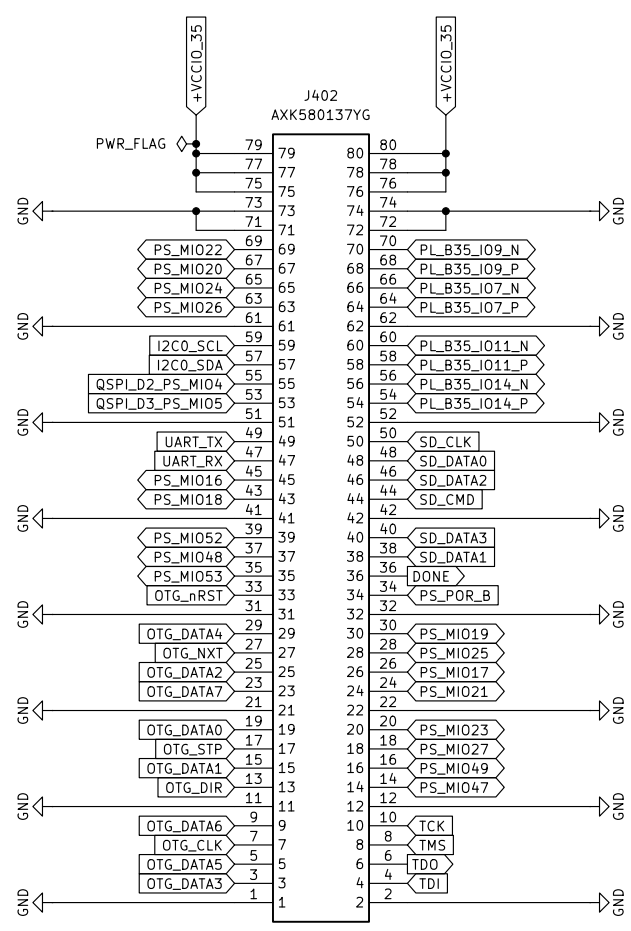

CARRIER REQUIREMENT:
 J402.34 = PS_POR_B.
 Carrier reset/POR circuit must
 hold PS_POR_B low until all rails
 and PS_CLK are stable; do not
 rely on a button only.

CARRIER REQUIREMENT:
 J402 PS_MIO signals are 3.3V I/O on this
 SoM.
 Carrier SD/USB-UHCI/UART/I2C/QSPI-side
 devices and pull-ups must use compatible
 3.3V I/O.
 I2C_SCL/SDA pull-ups are not populated
 on the SoM; provide them on the carrier if
 used.

