







TODO: SKEDD Conn instead of tagconnect




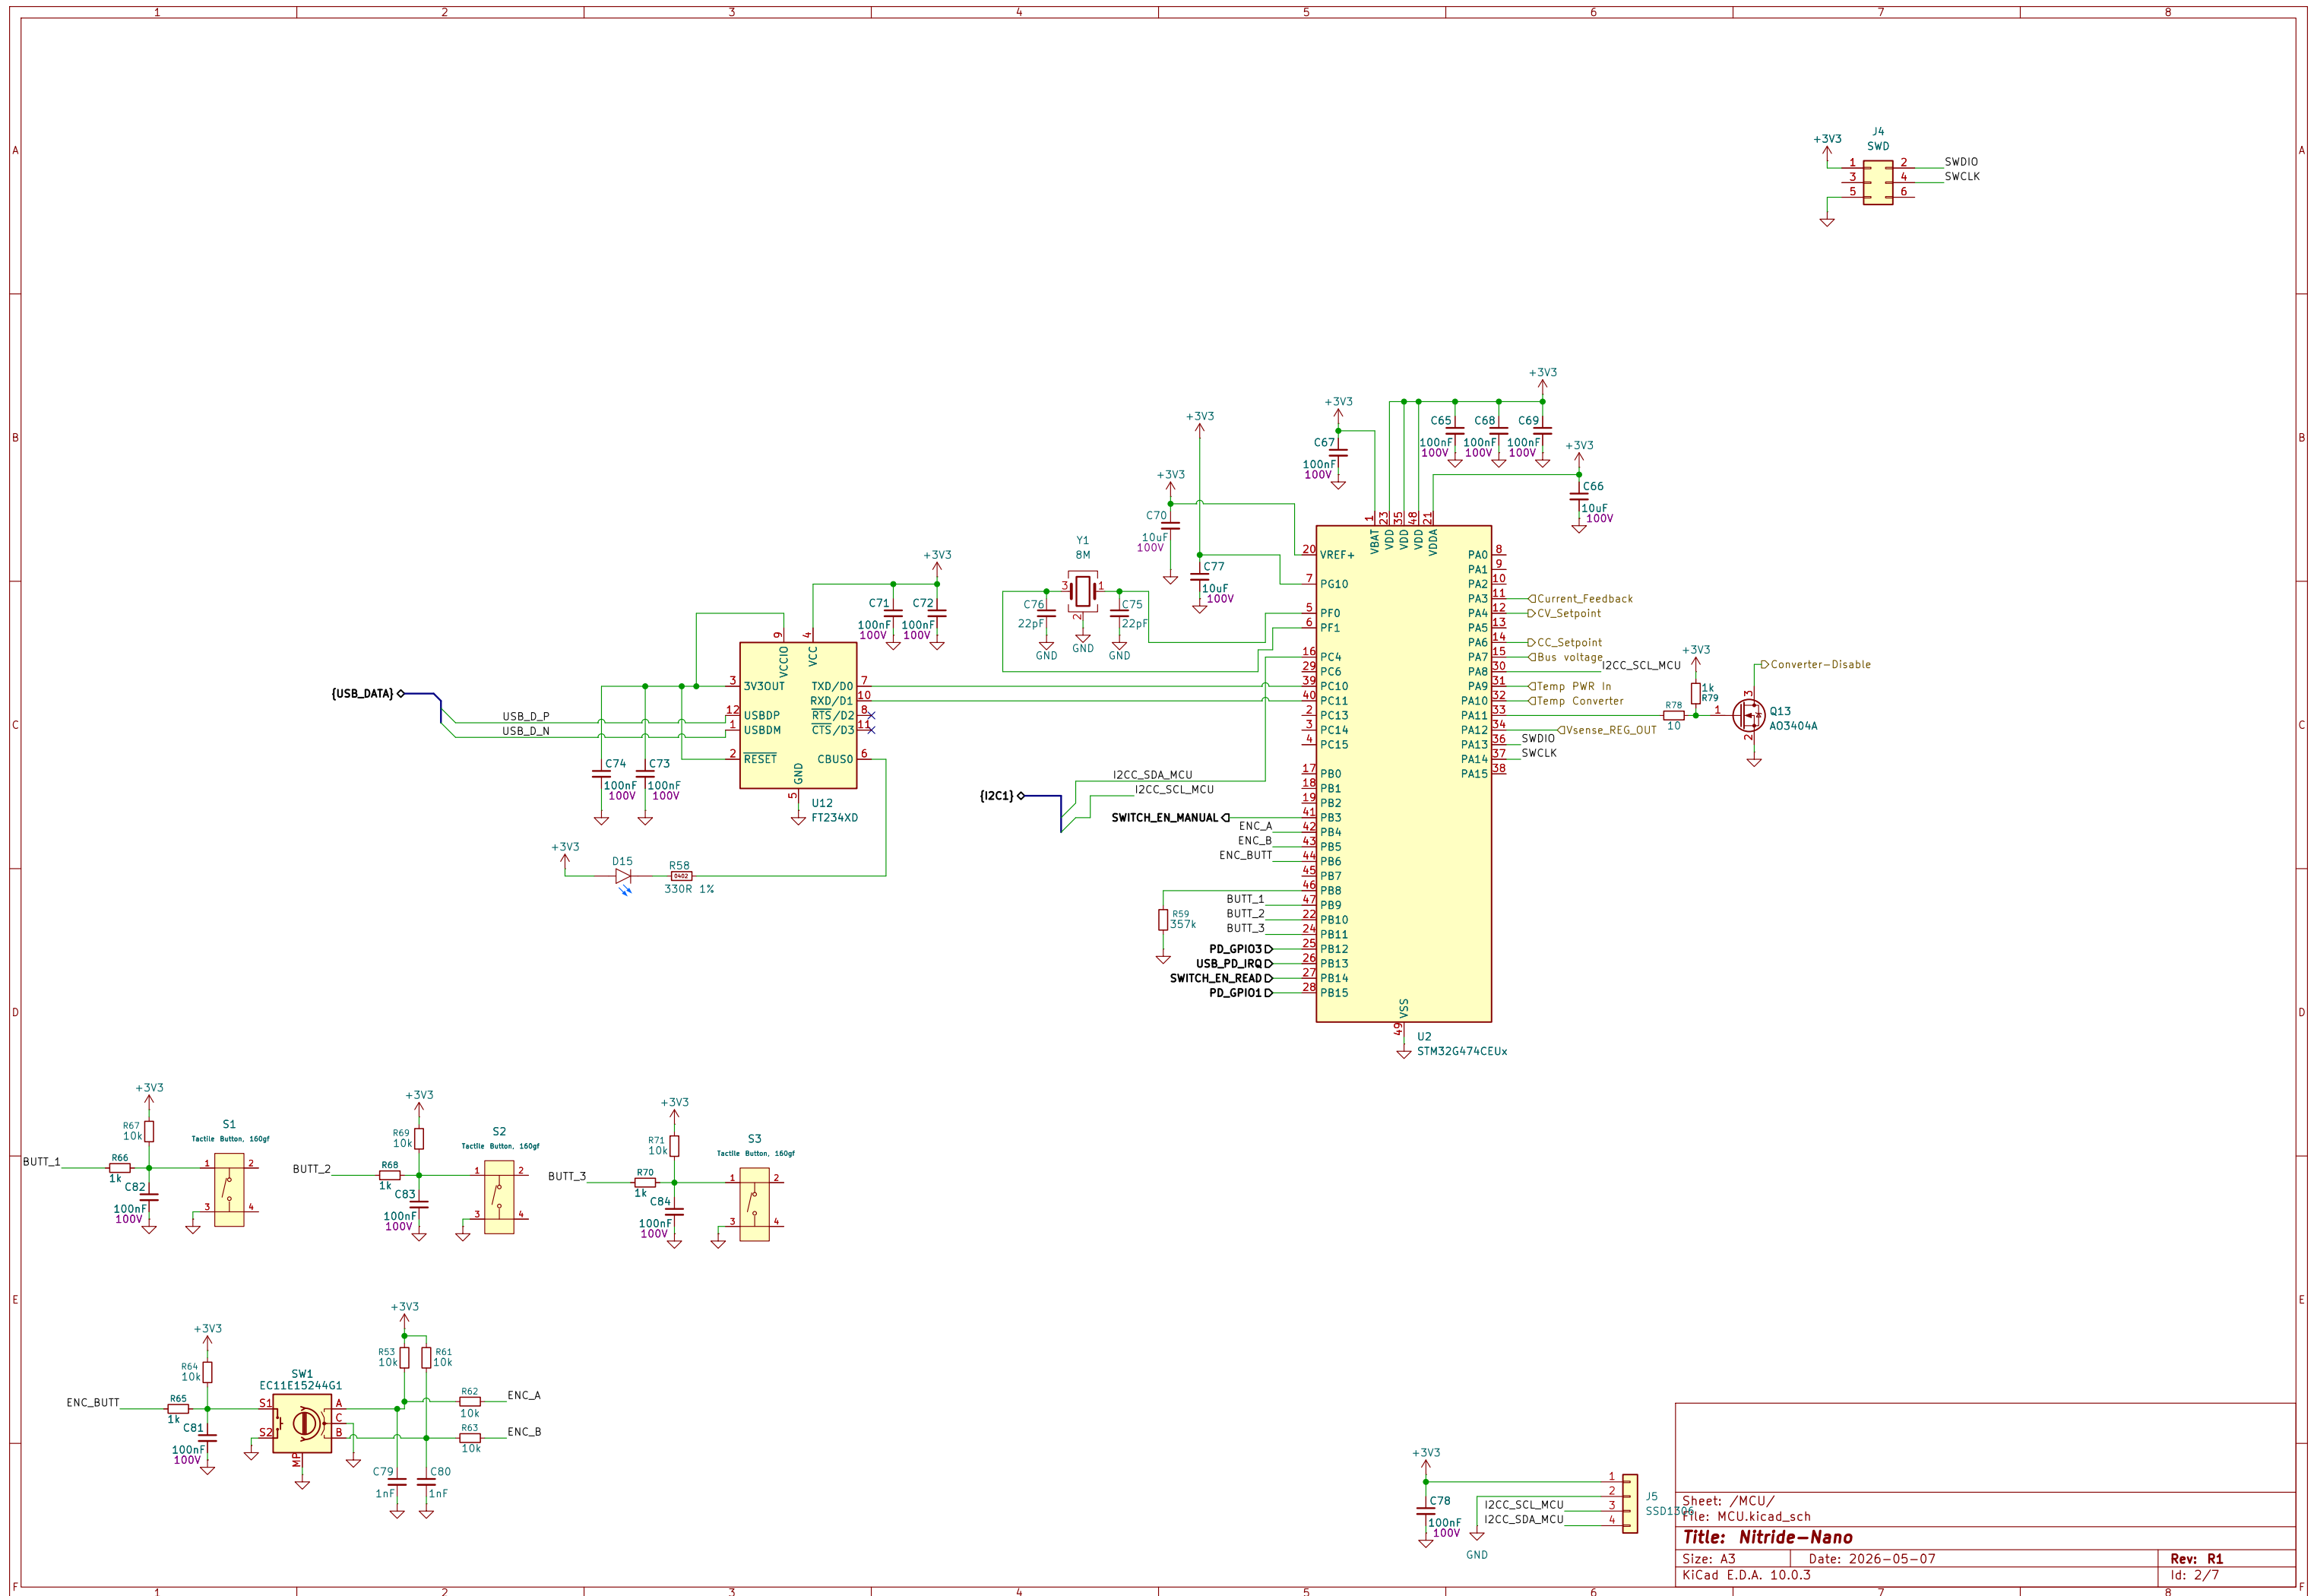

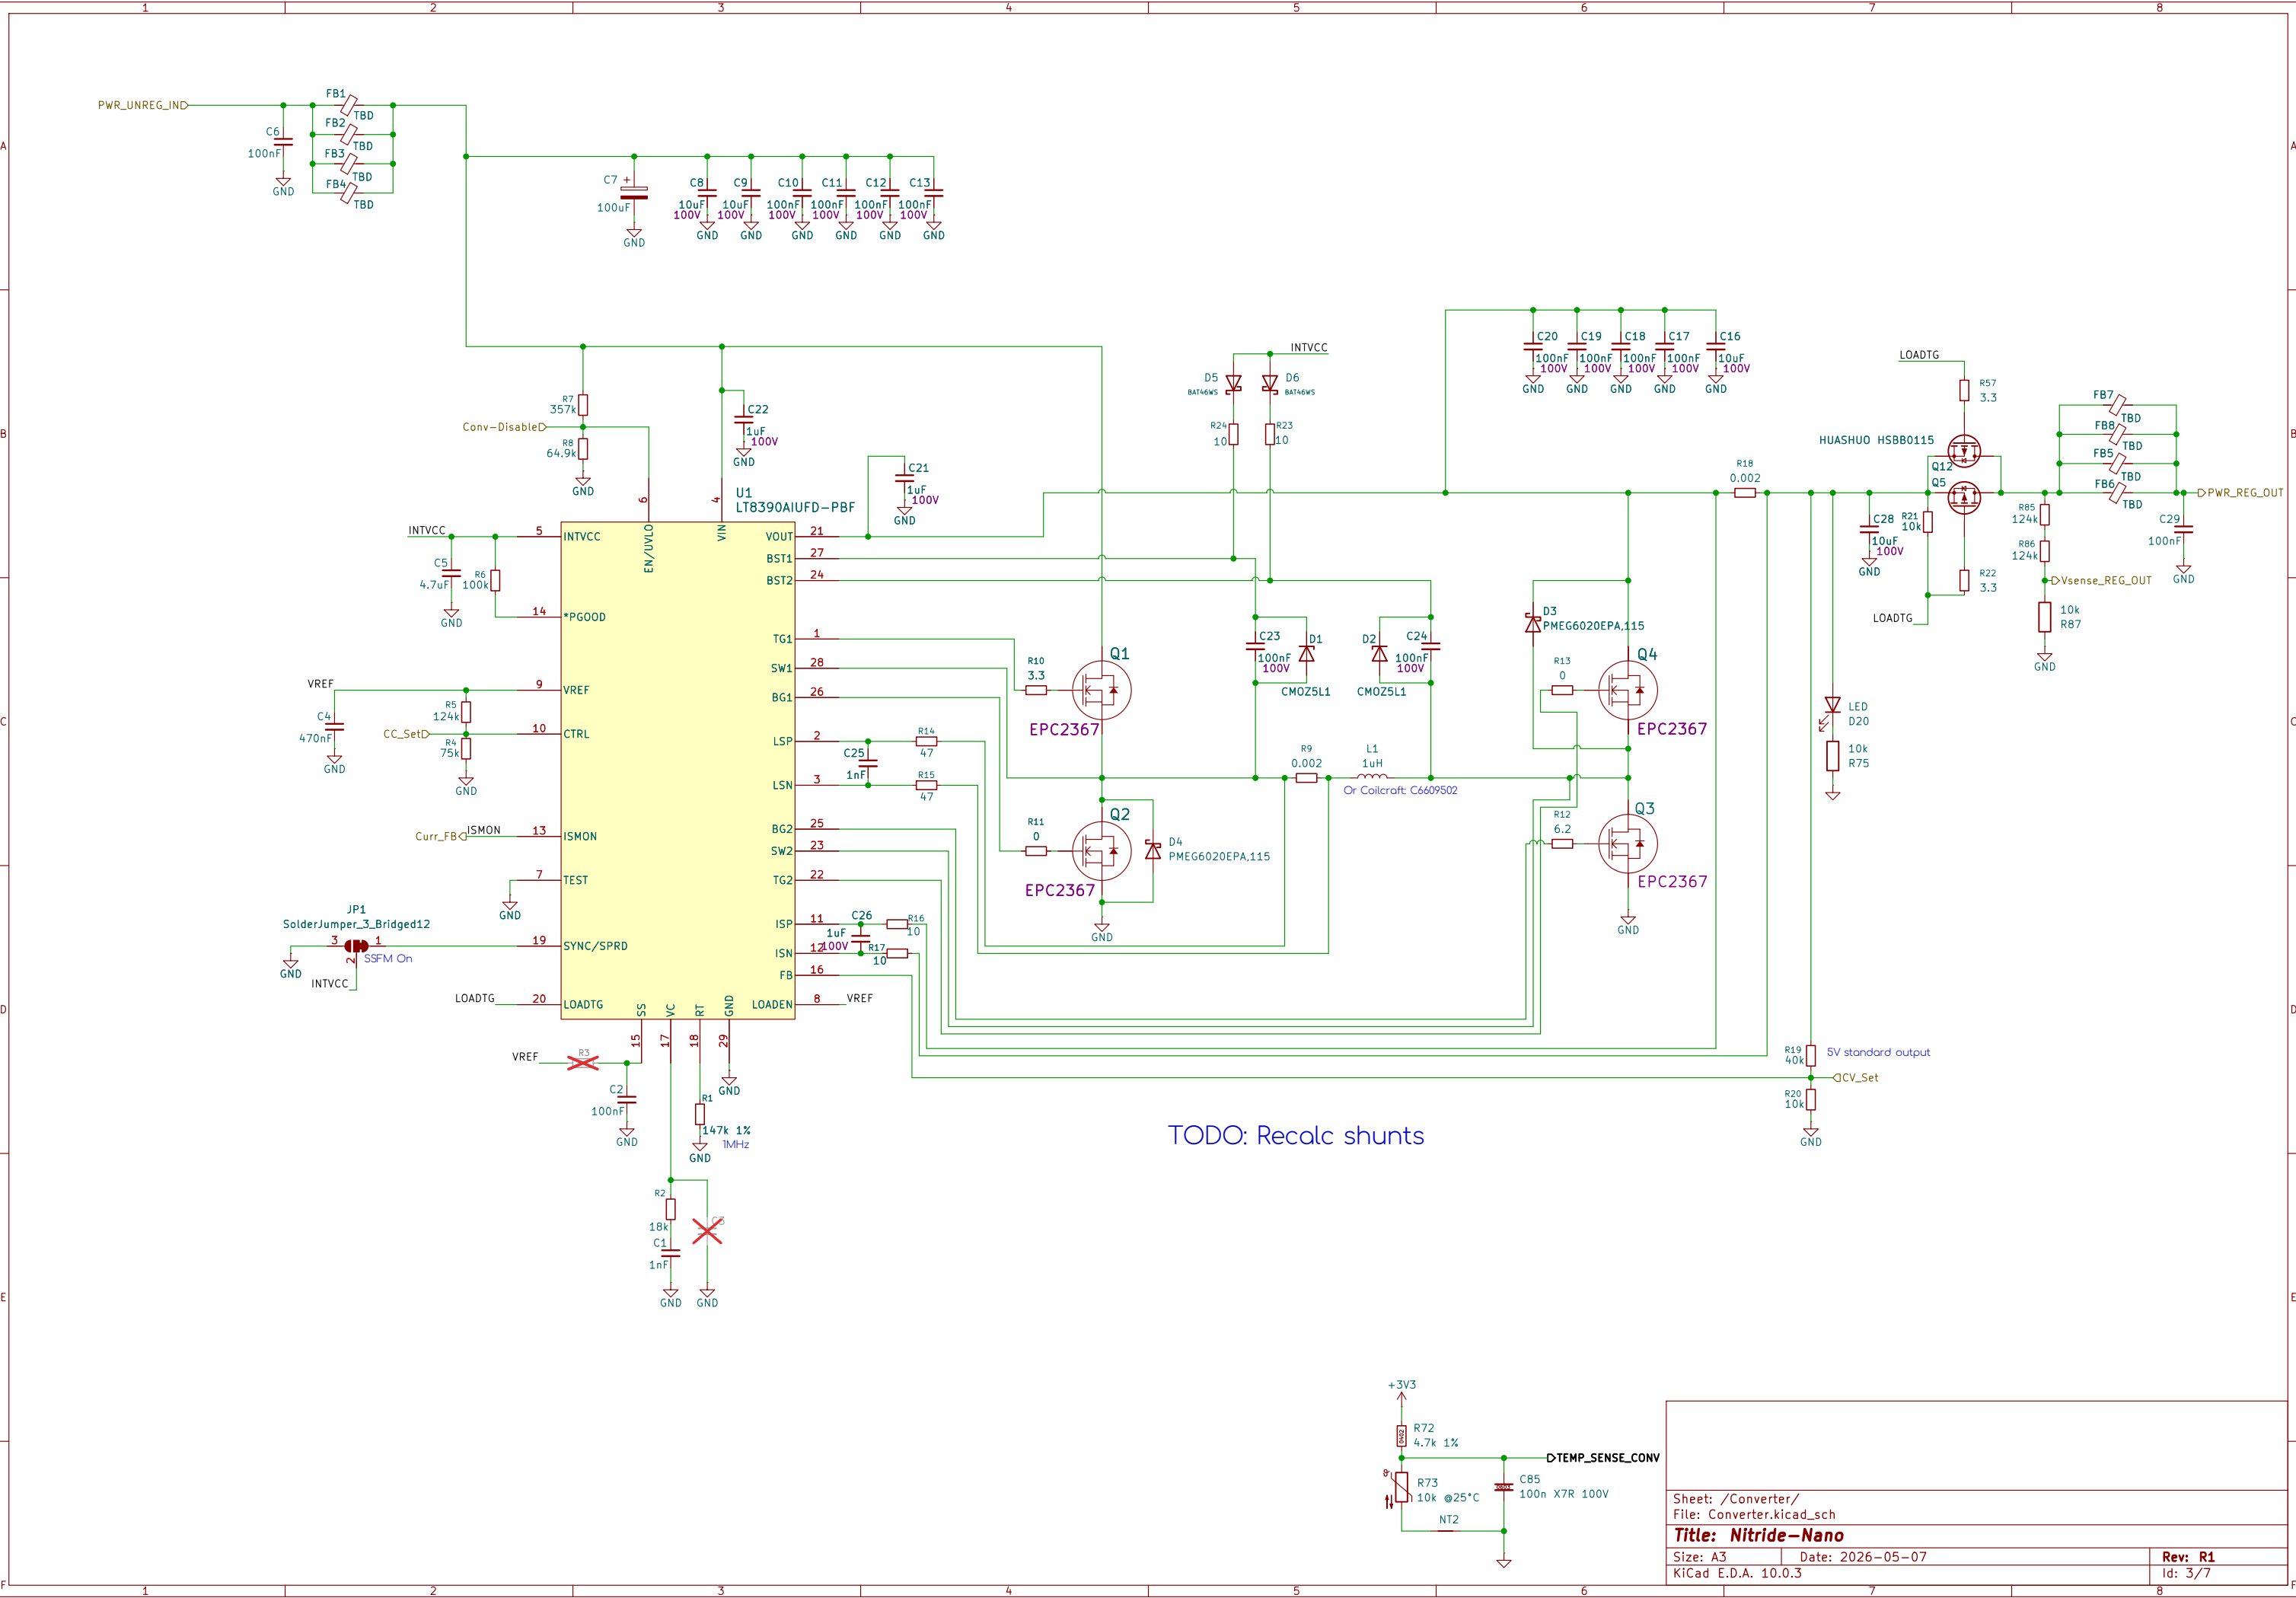

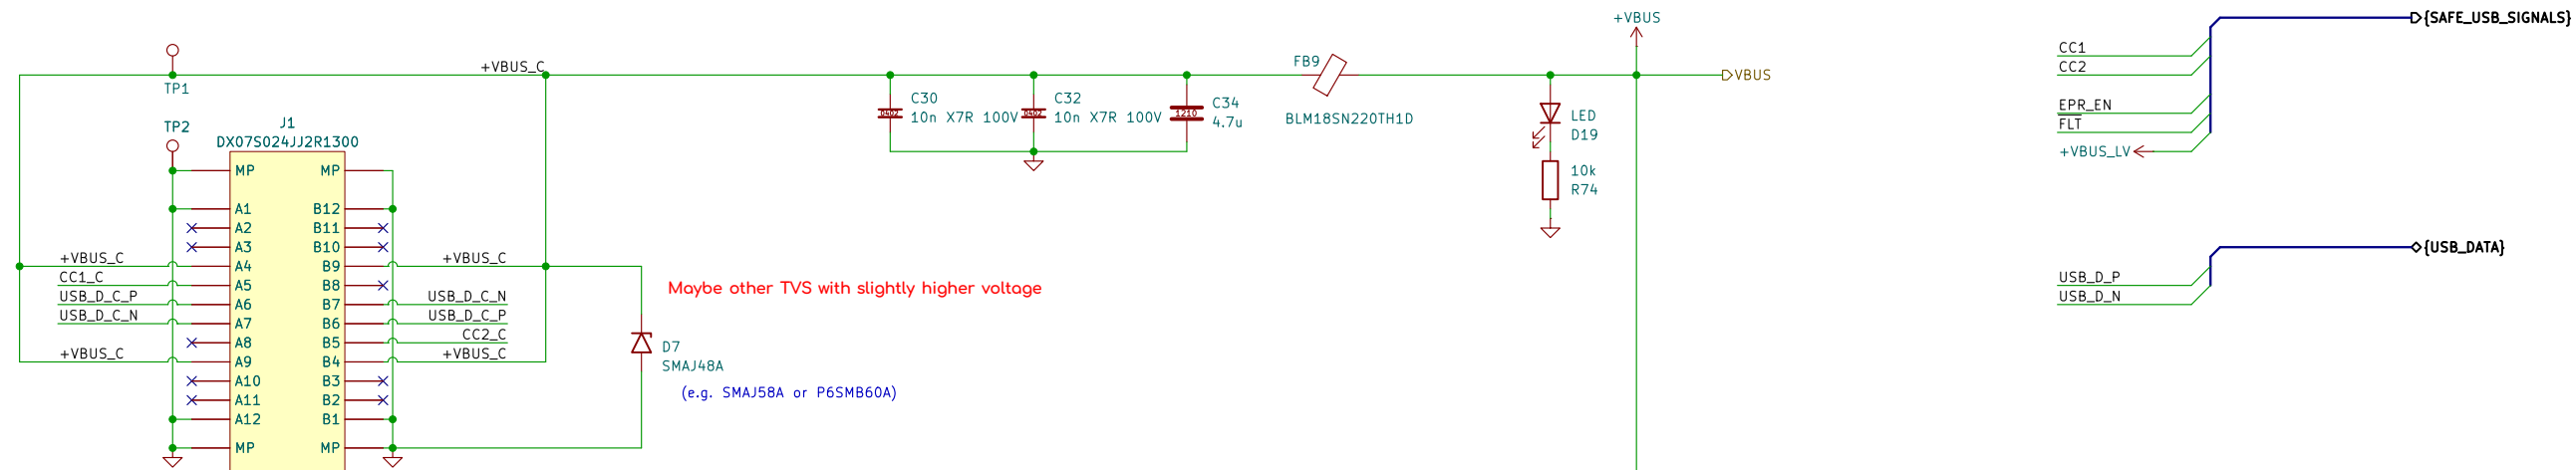


USB-C 3.2 Gen2 48V 5A SMD receptacle

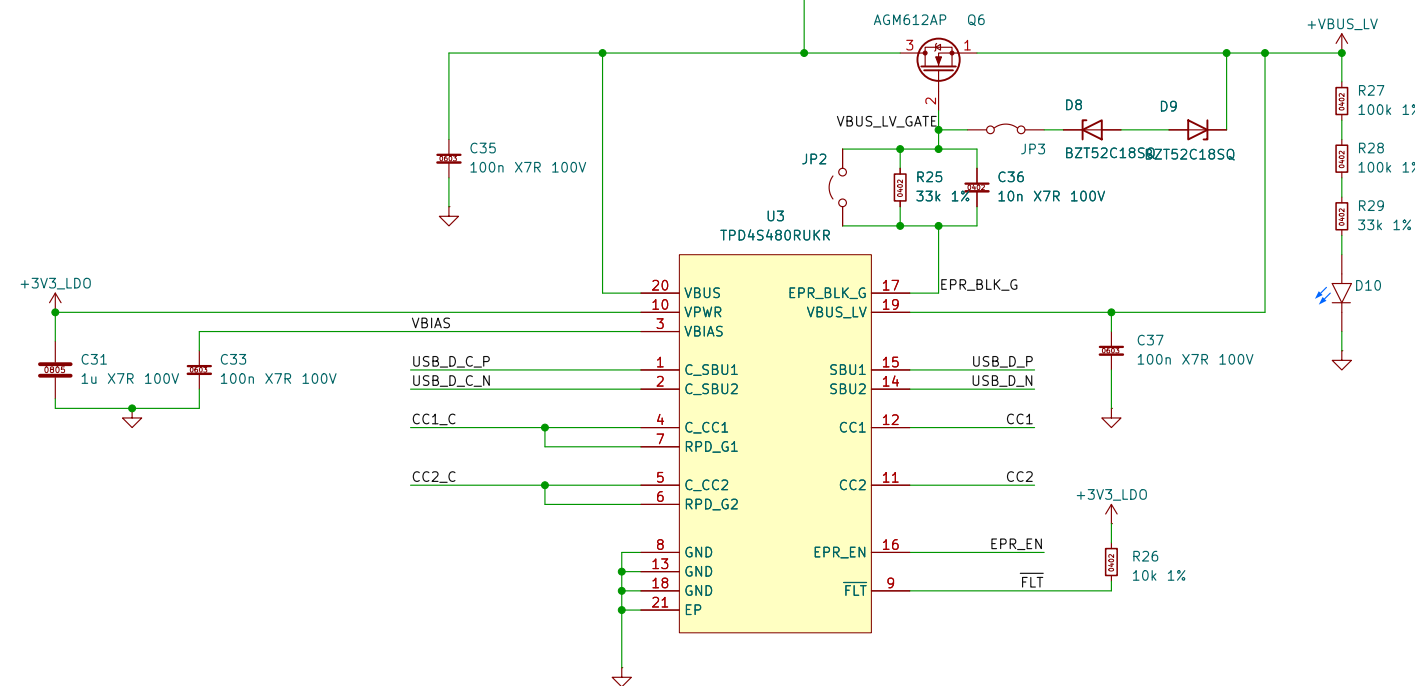

USB Type-C™ 48V EPR port protector with short-to-VBUS overvoltage and IEC ESD protection

Sheet: /USB/ File: USB.kicad_sch		
Title: Nitride-Nano		
Size: A3	Date: 2026-05-07	Rev: R1
KiCad E.D.A. 10.0.3		Id: 4/7


DESIGN NOTE:
3V3 LDO total current needs to be lower than 5mA at startup:
EEPROM read: 1mA
POWER OK LED: 0.65mA
TPD4S480: 0.16mA
LM2765: 0.13mA
LTC7004: 0.05mA
I²C pull-ups: ~0.5mA
ADC resistors: 0.02mA
AND gate: <0.01mA
Total ~2.5mA < 5mA

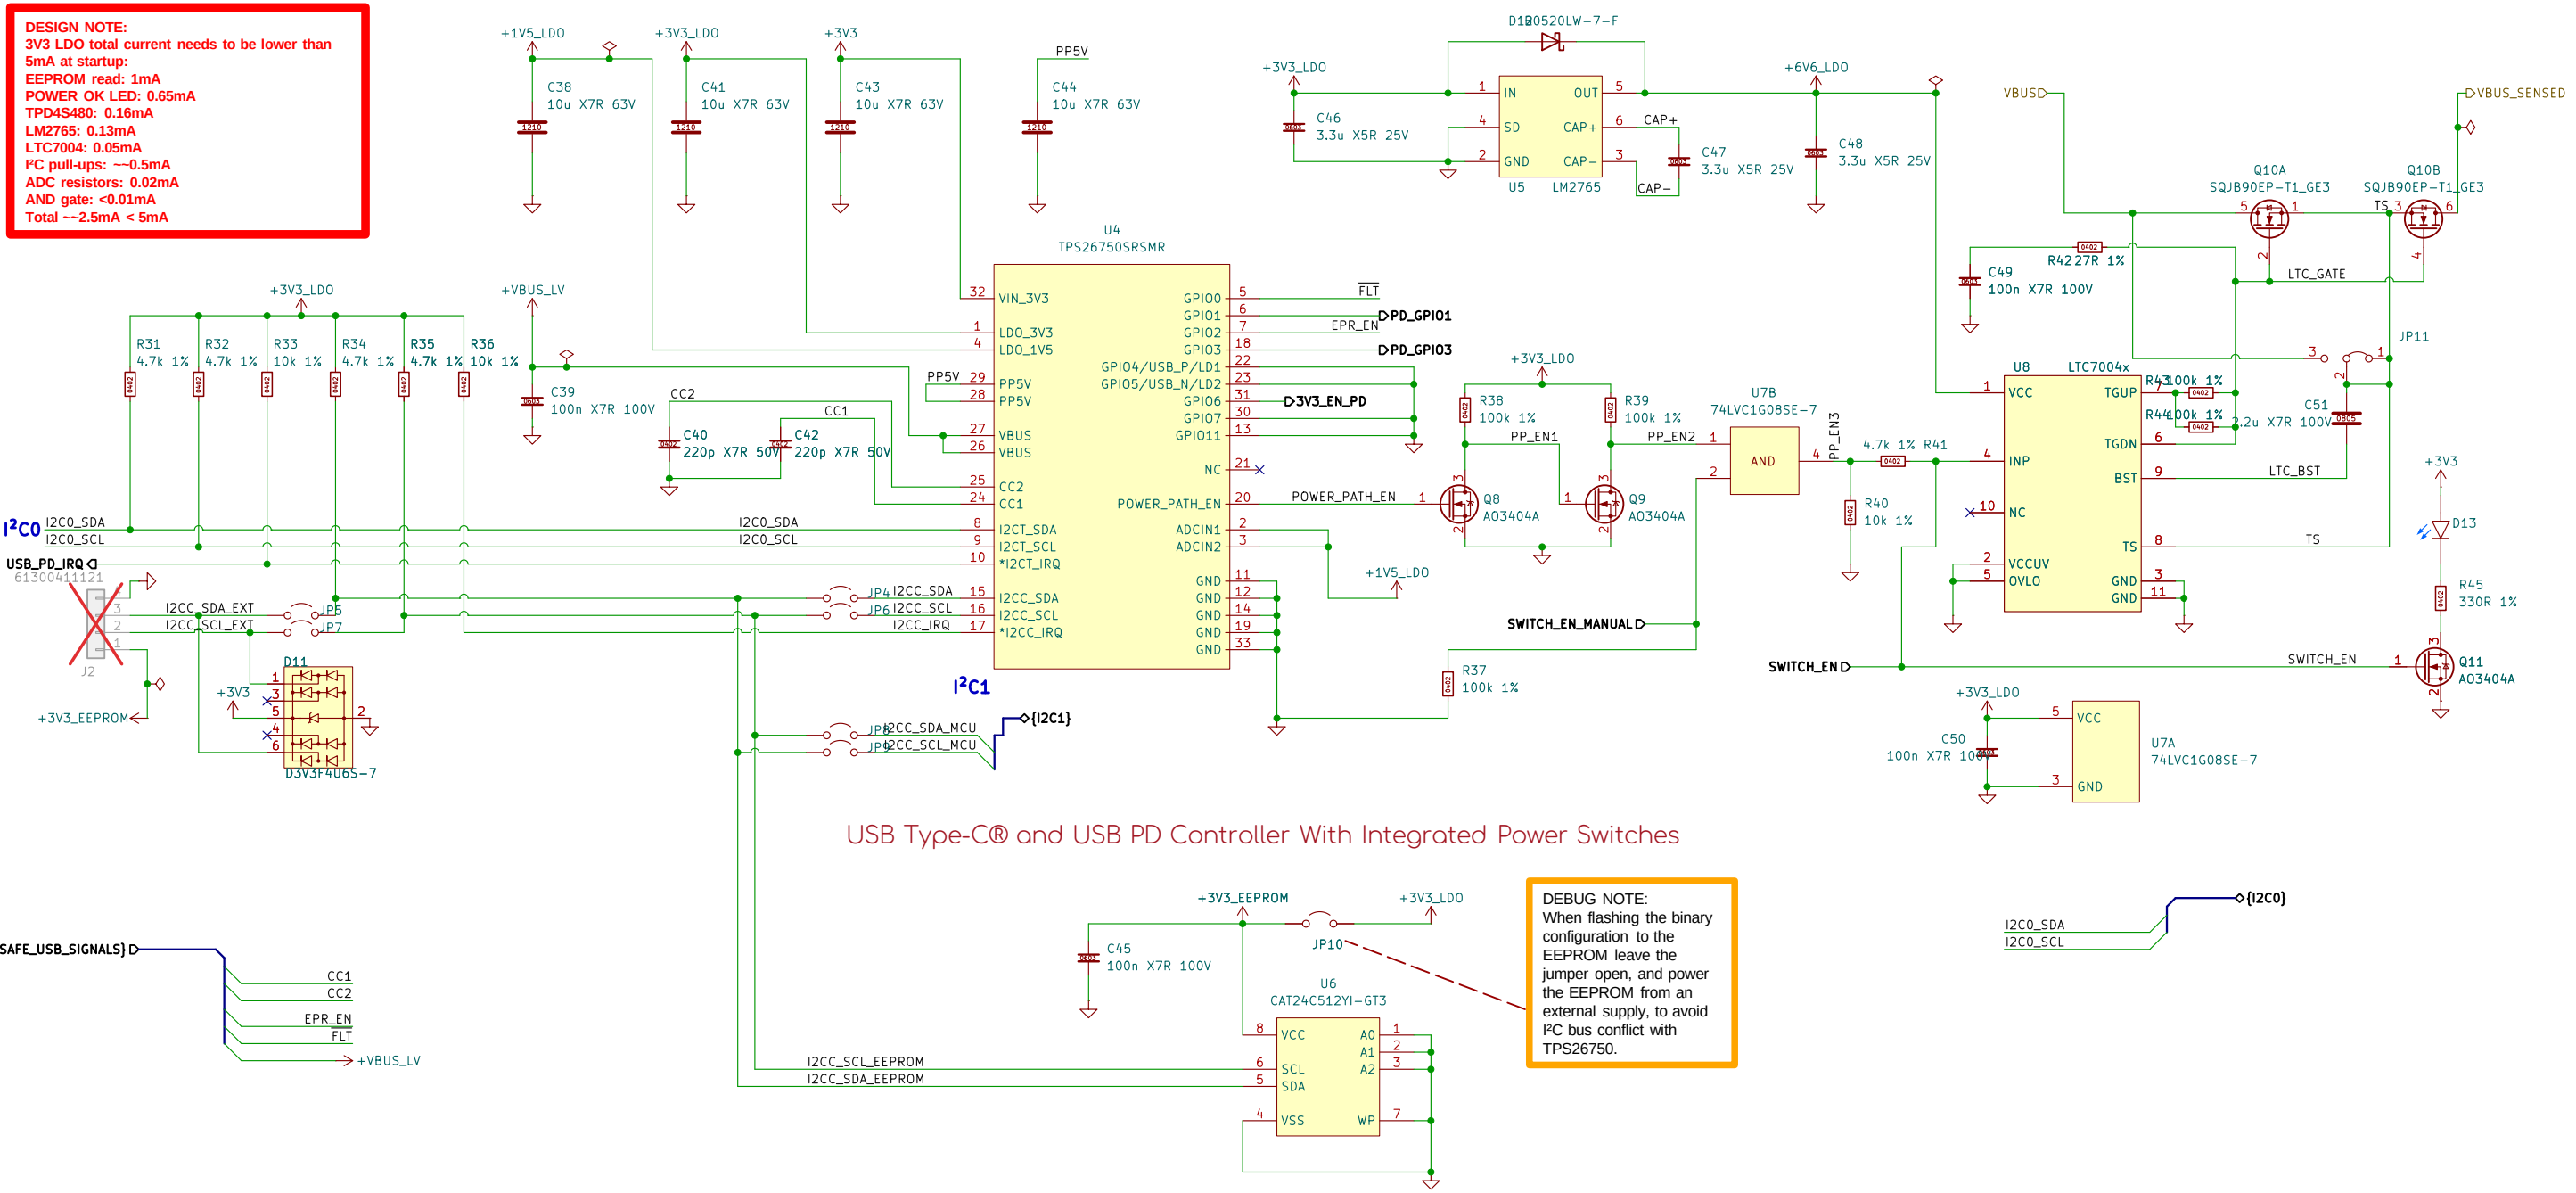

USB Type-C® and USB PD Controller With Integrated Power Switches

DEBUG NOTE:
When flashing the binary configuration to the EEPROM leave the jumper open, and power the EEPROM from an external supply, to avoid I²C bus conflict with TPS26750.

- | | | | | | |
|---------------|------|----------|------|------------|------|
| POWER_PATH_EN | TP14 | PD_GPI01 | TP15 | USB_PD_IRQ | TP16 |
| PP_EN1 | TP17 | PD_GPI03 | TP18 | | |
| PP_EN2 | TP19 | | | | |
| PP_EN3 | TP21 | +1V5_LDO | TP22 | | |
| | | +3V3_LDO | TP24 | | |
| LTC_GATE | TP25 | +6V6_LDO | TP26 | | |

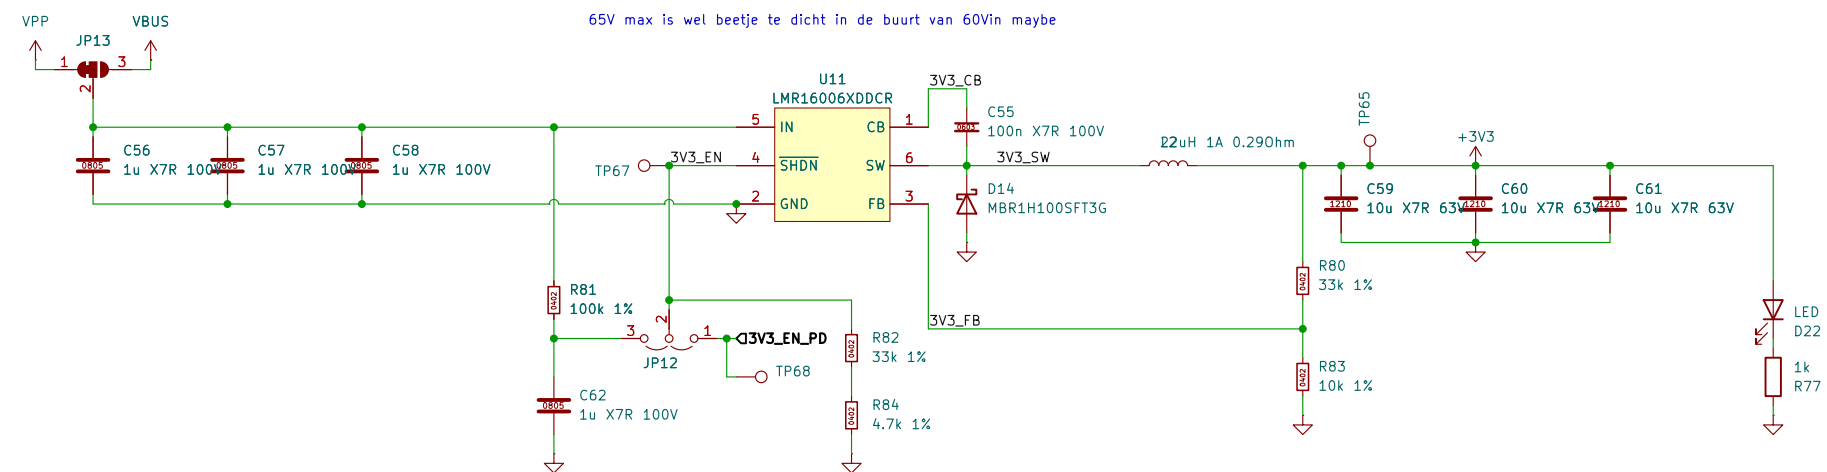

3.3V 600mA 700kHz Buck Regulator

85-V, 20-Bit, Ultra-Precise Power/Energy/Charge Monitor With I²C Interface