





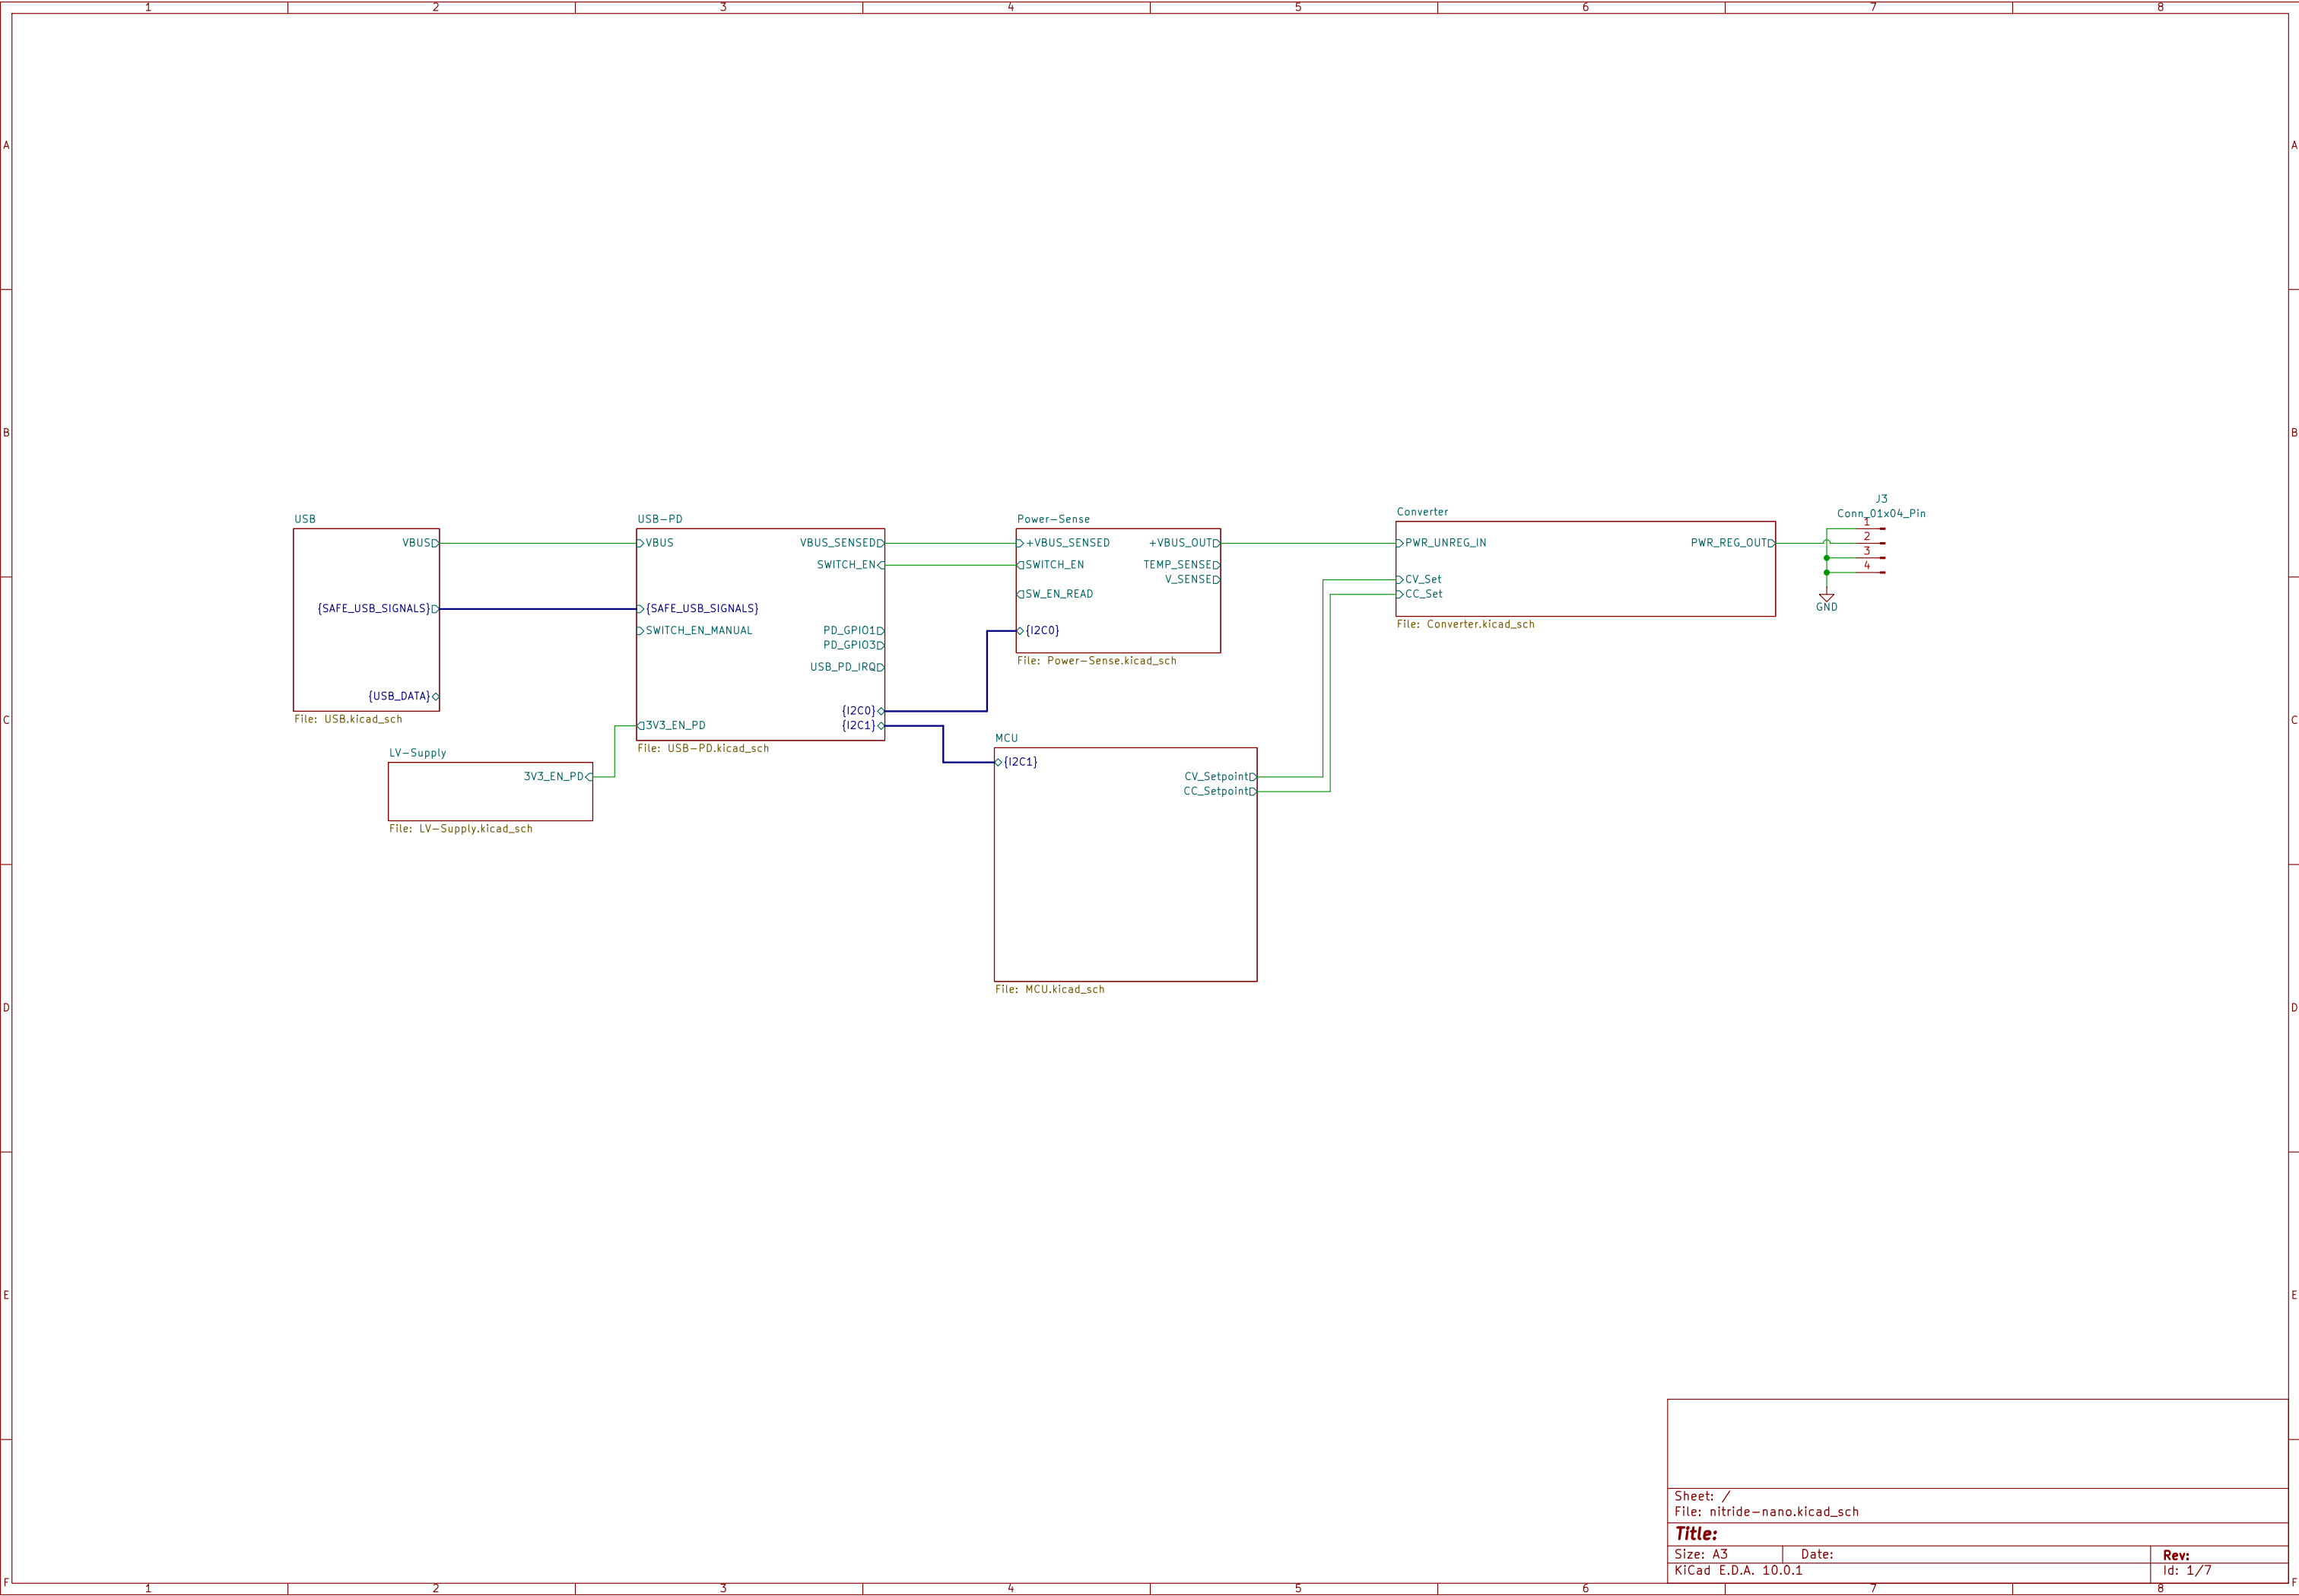

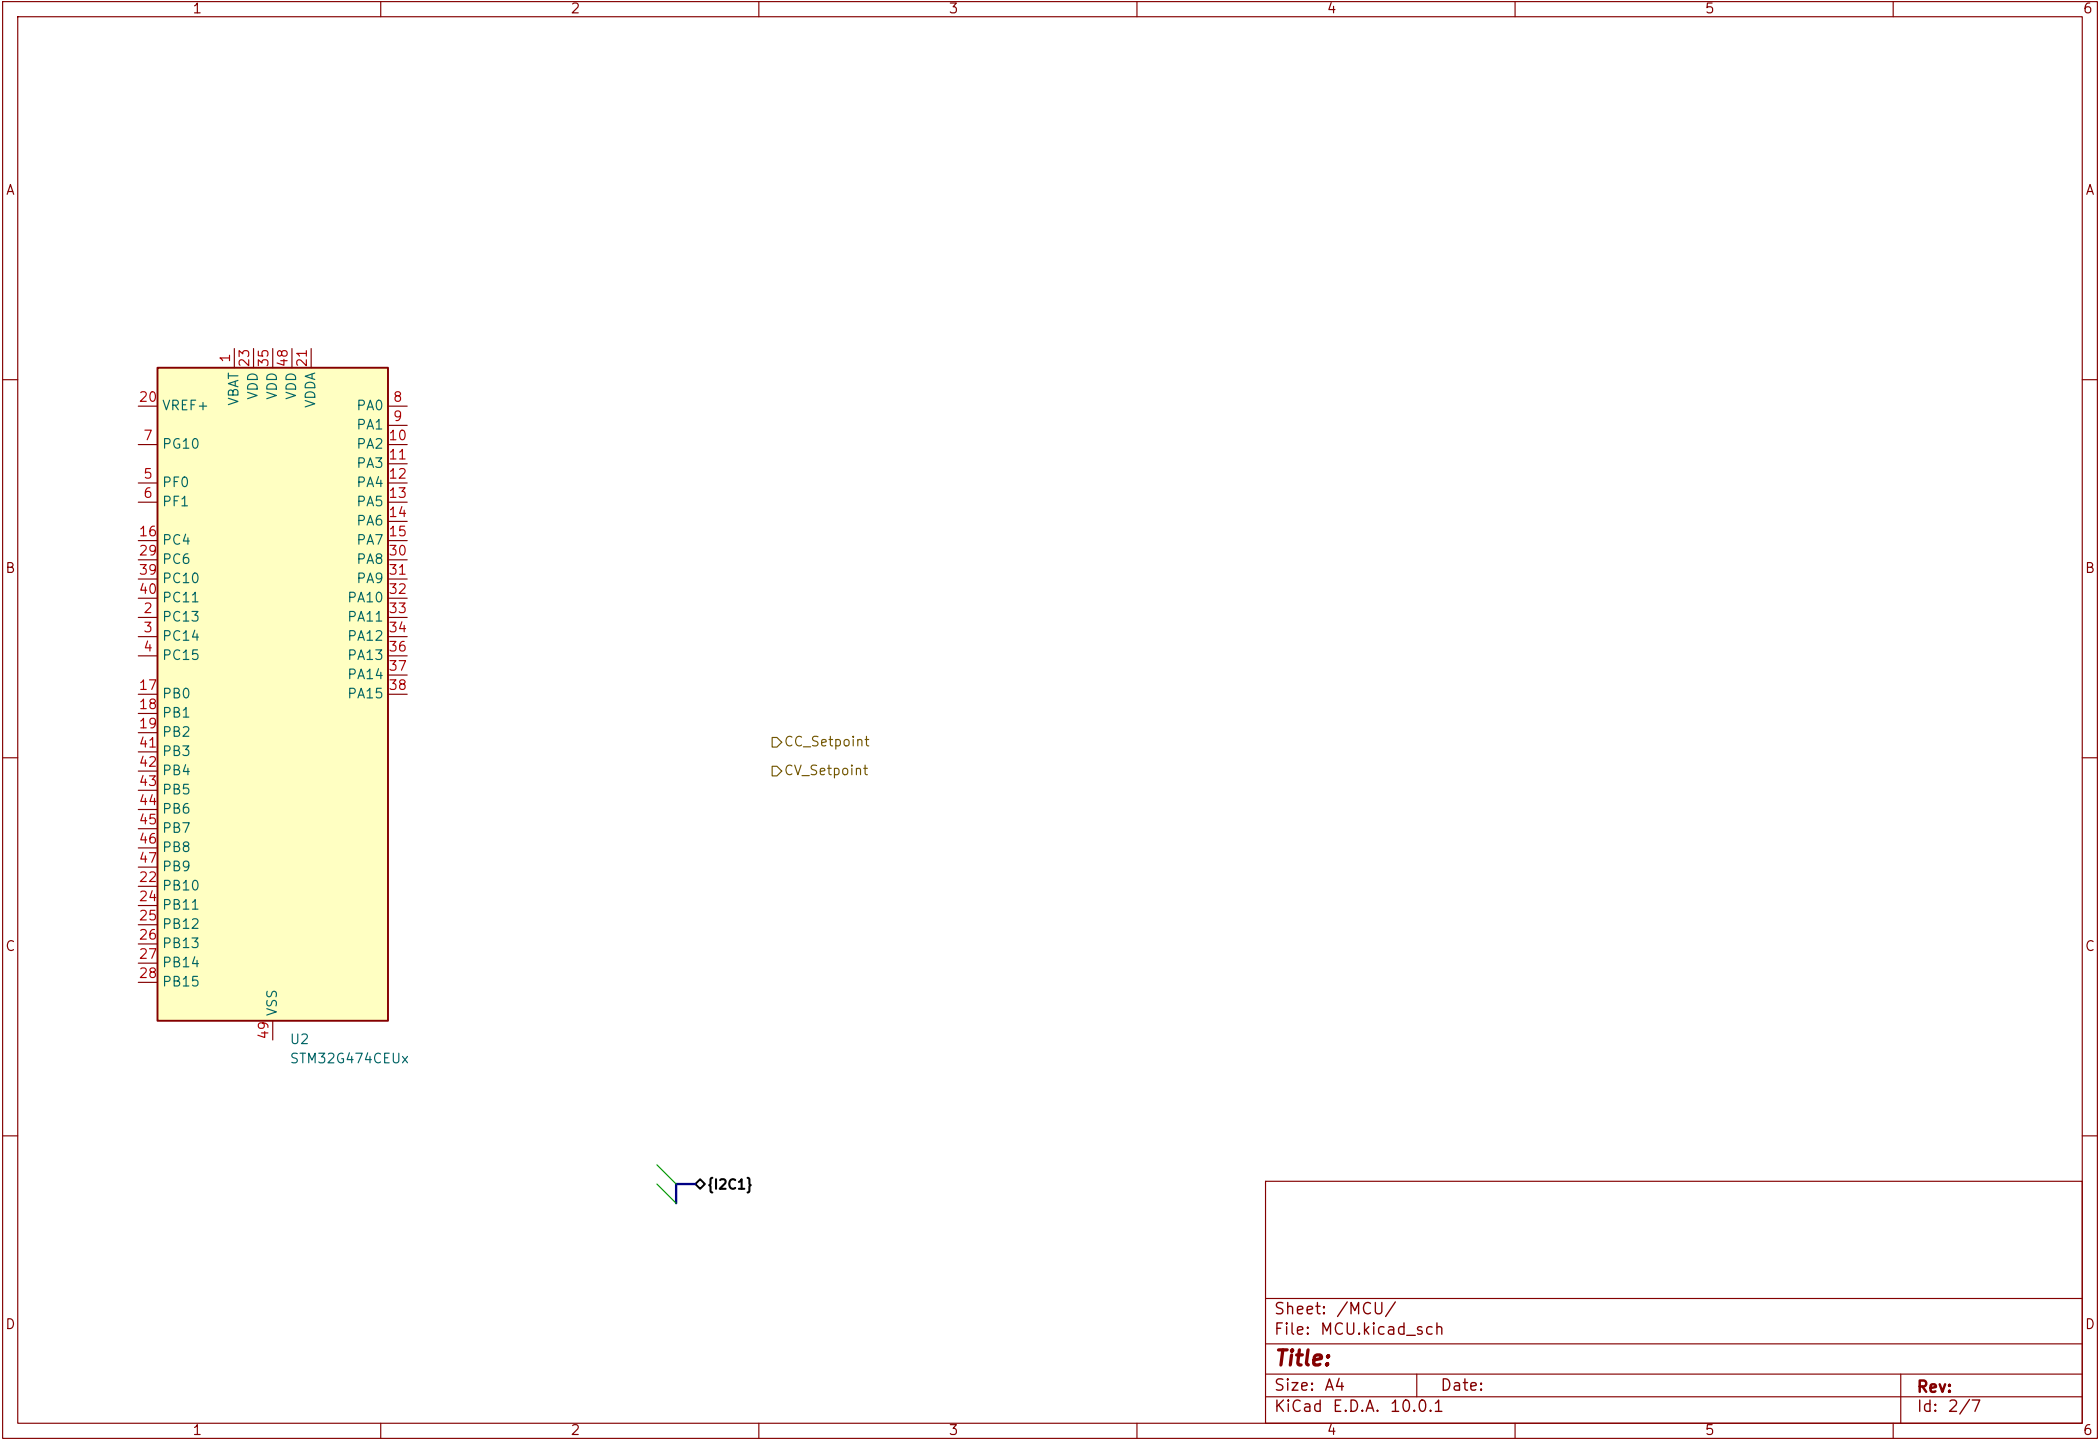


Sheet: /MCU/		
File: MCU.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 10.0.1		Id: 2/7

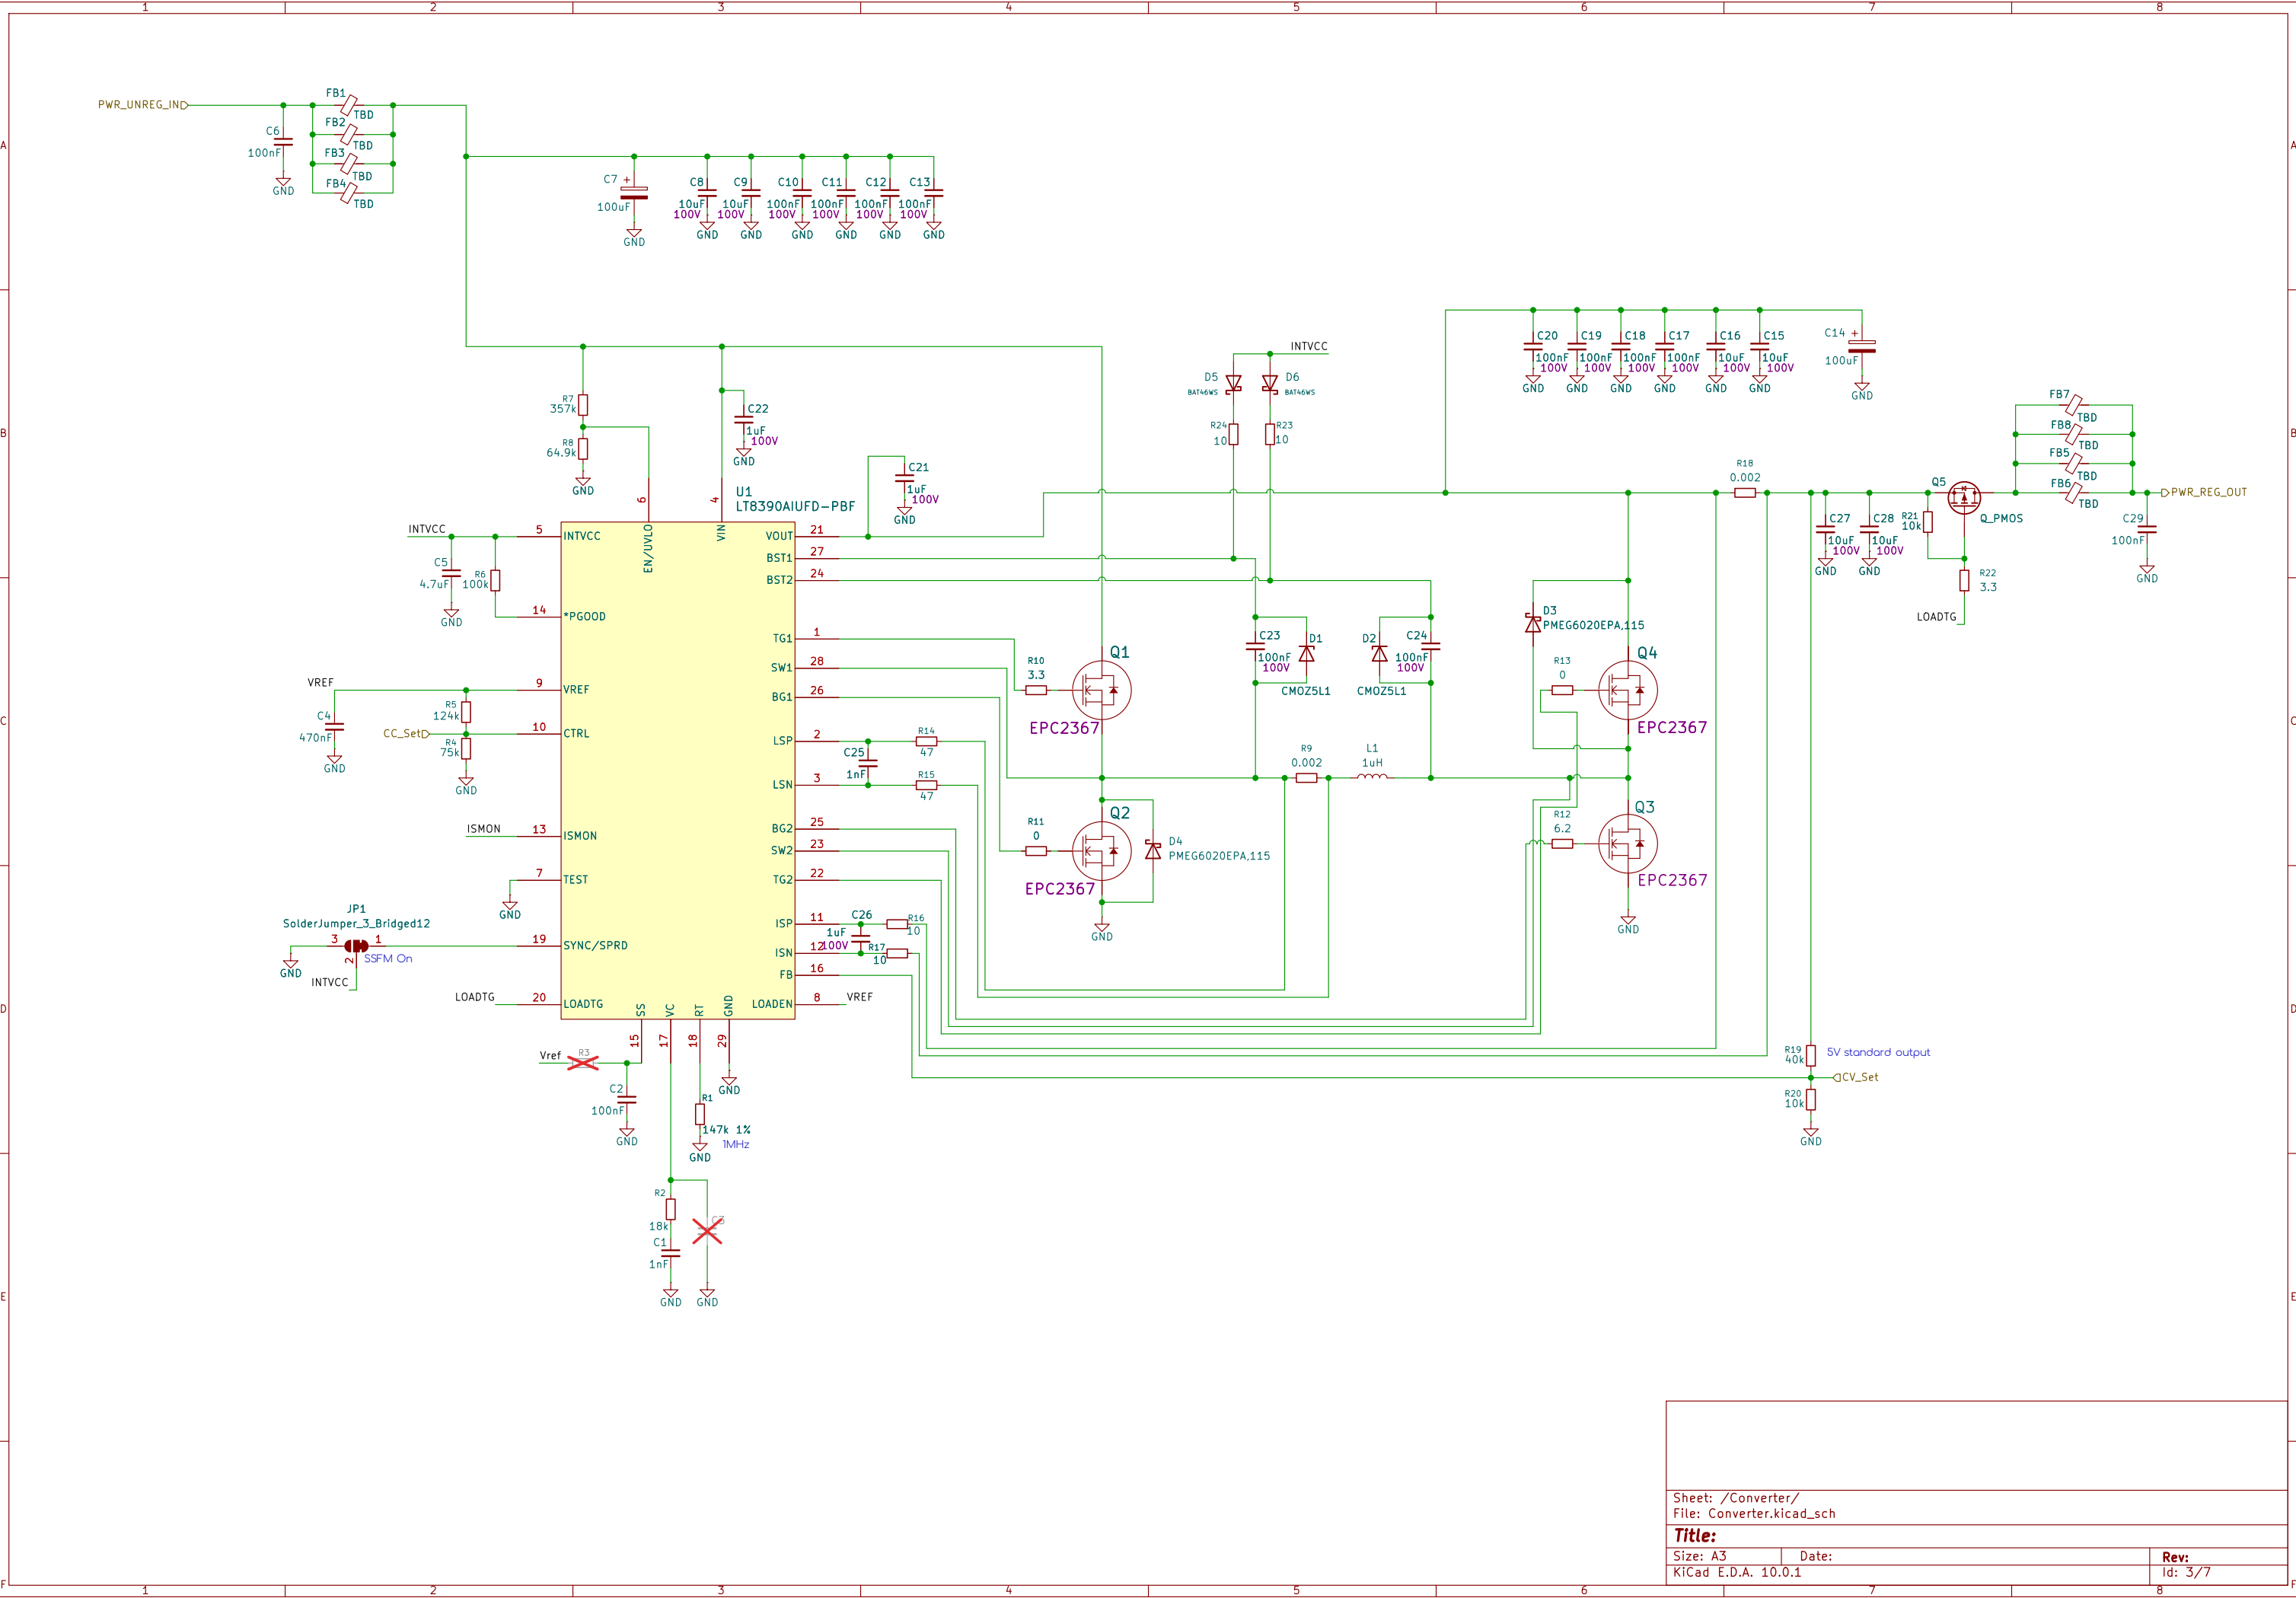



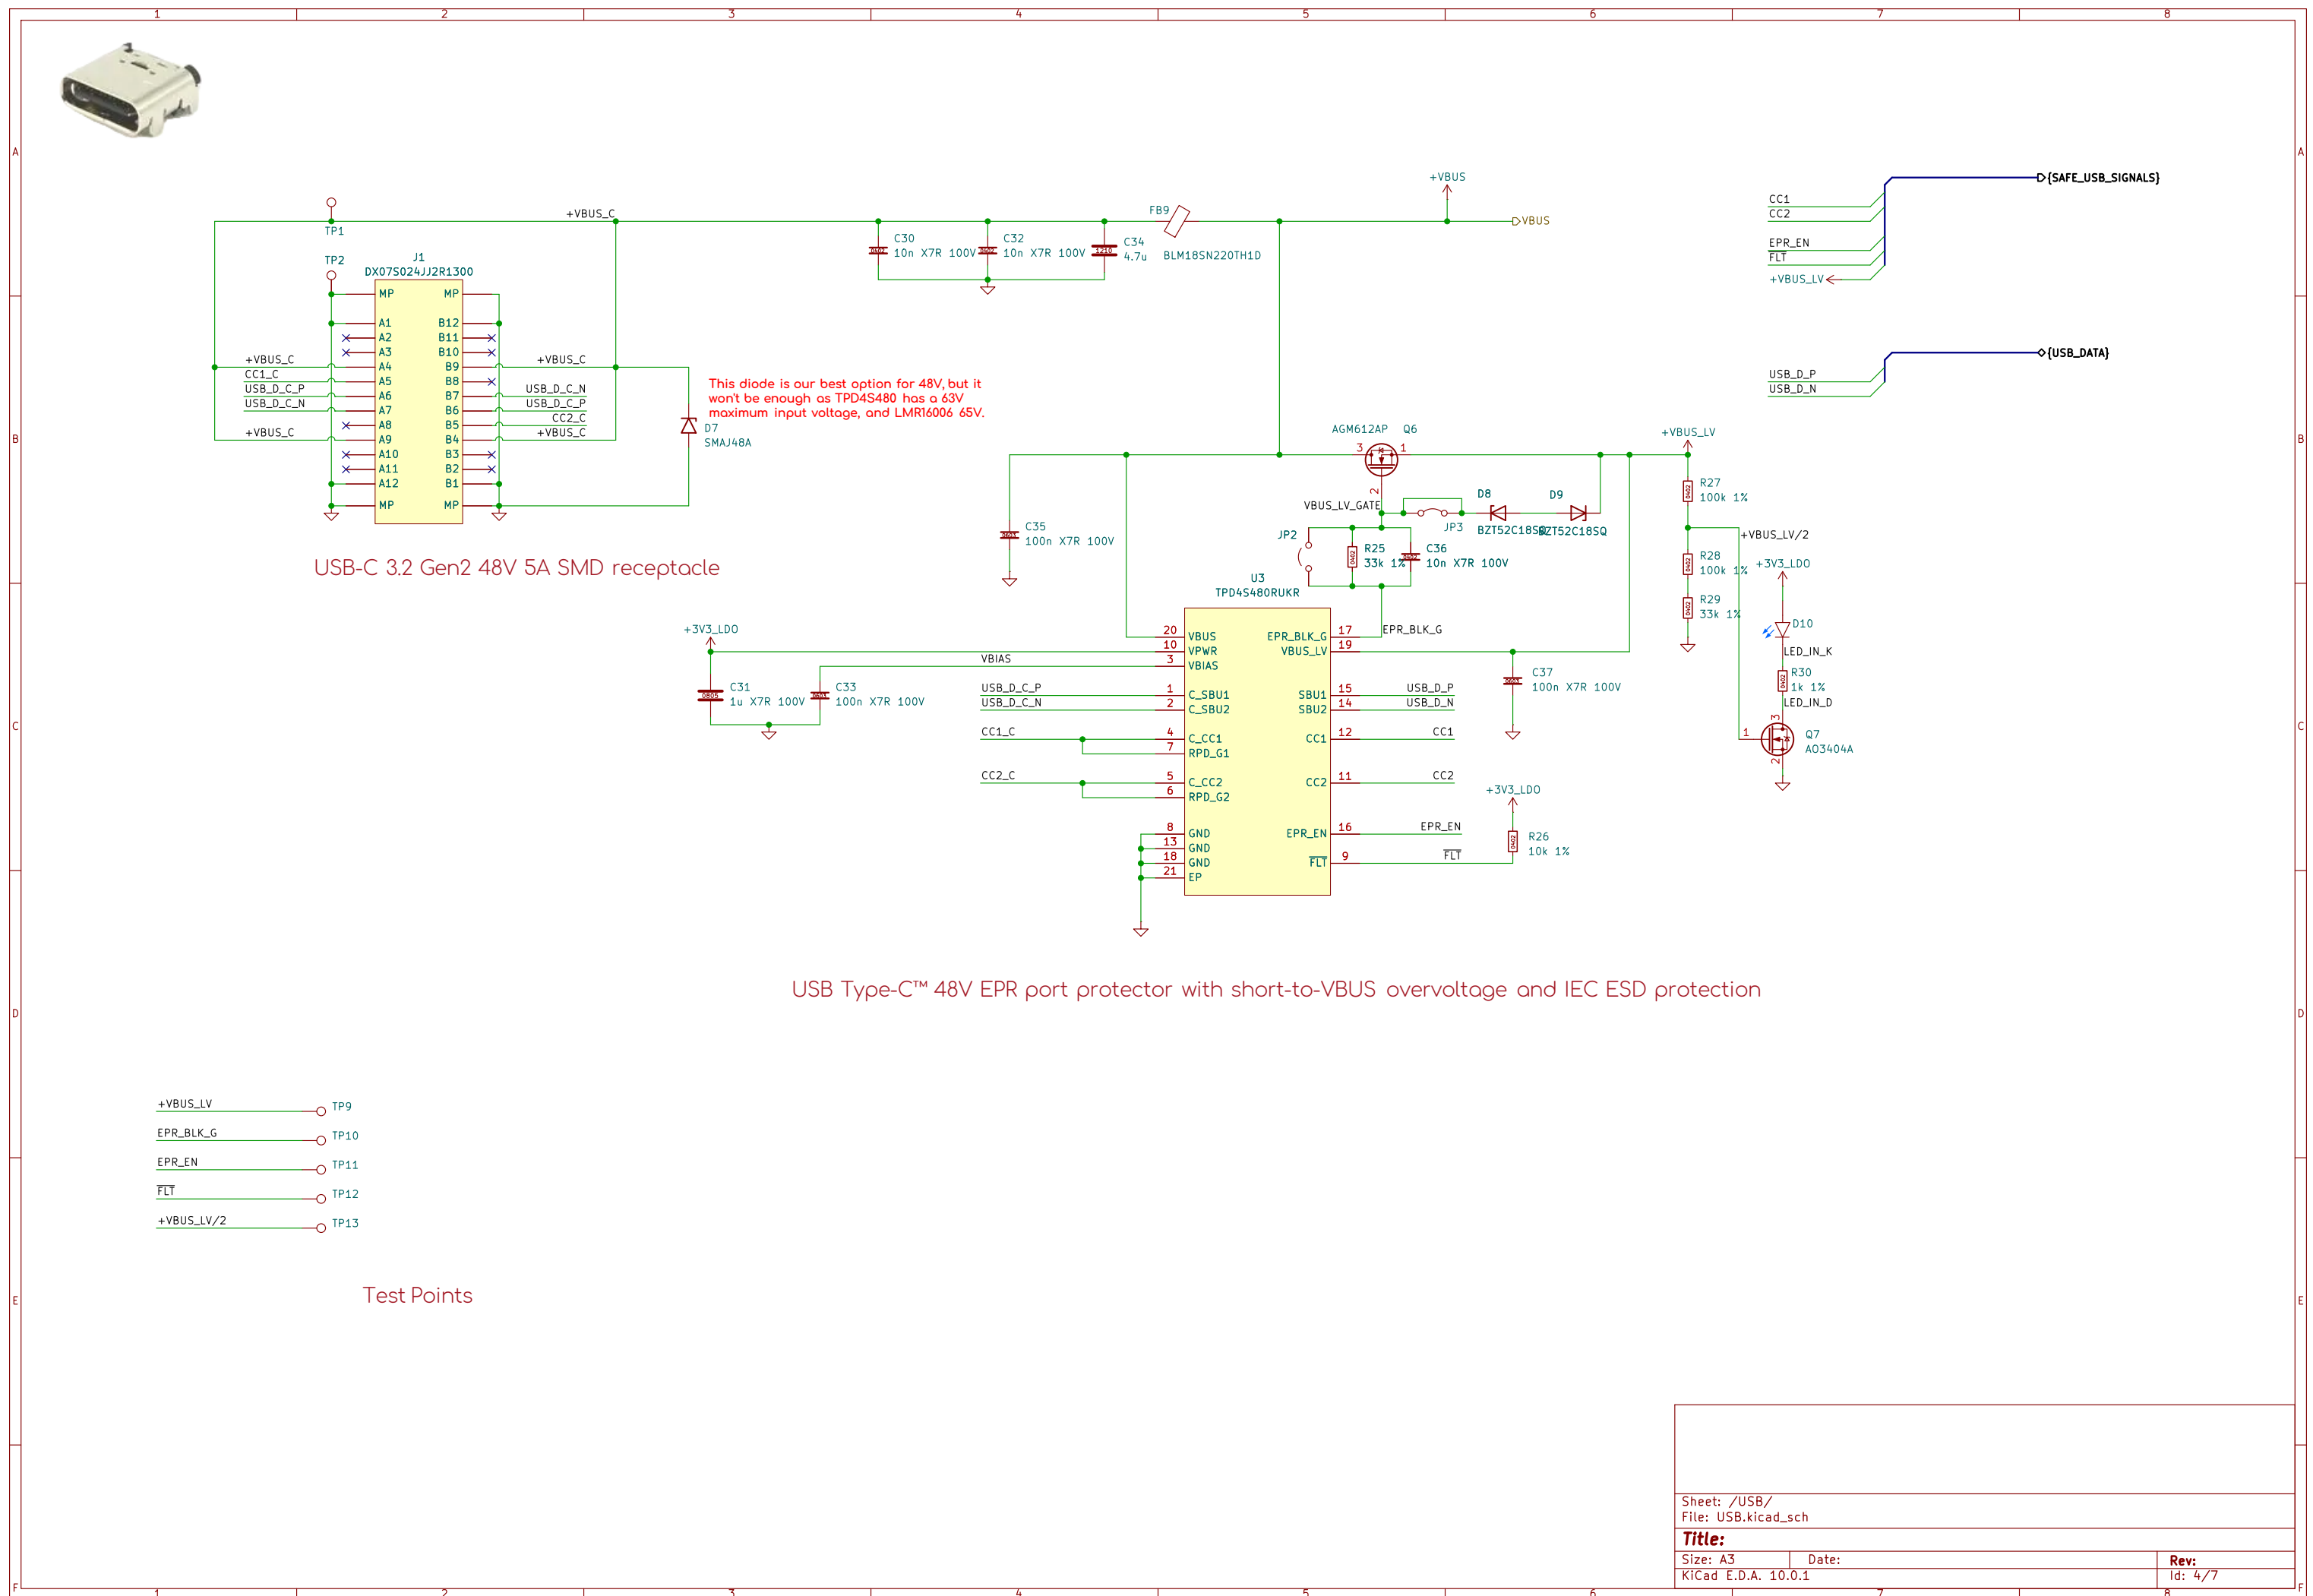



DESIGN NOTE:
3V3 LDO total current needs to be lower than 5mA at startup:
EEPROM read: 1mA
POWER OK LED: 0.65mA
TPD4S480: 0.16mA
LM2765: 0.13mA
LTC7004: 0.05mA
I²C pull-ups: ~0.5mA
ADC resistors: 0.02mA
AND gate: <0.01mA
Total ~2.5mA < 5mA

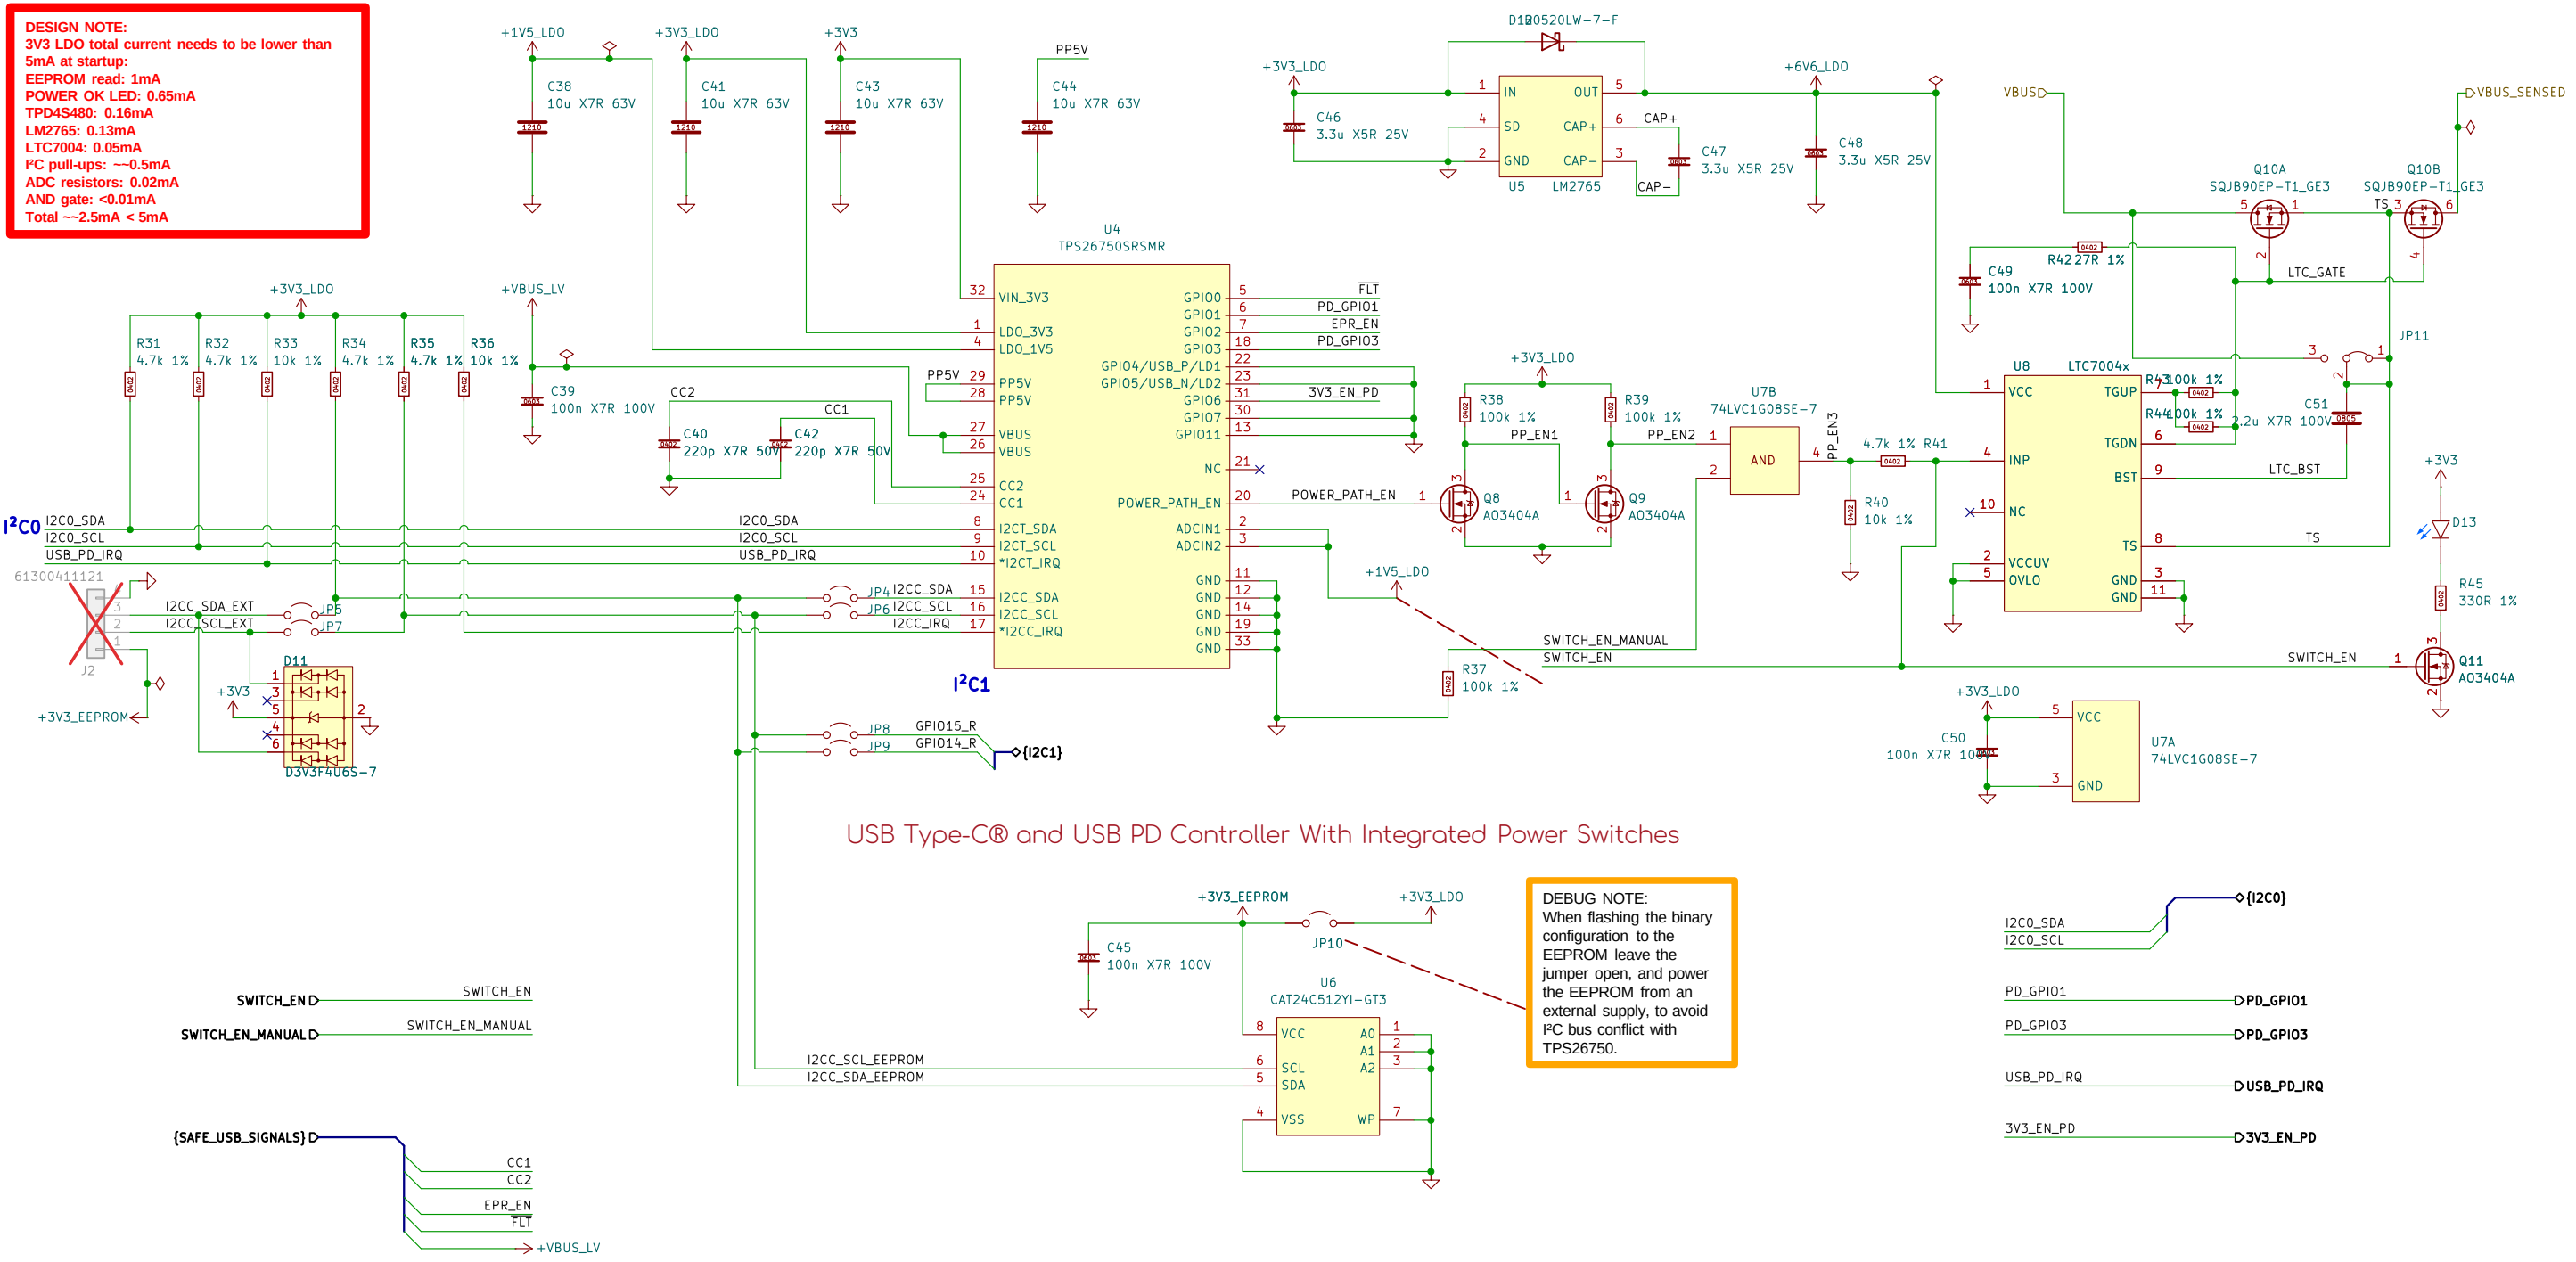

USB Type-C® and USB PD Controller With Integrated Power Switches

DEBUG NOTE:
When flashing the binary configuration to the EEPROM leave the jumper open, and power the EEPROM from an external supply, to avoid I²C bus conflict with TPS26750.

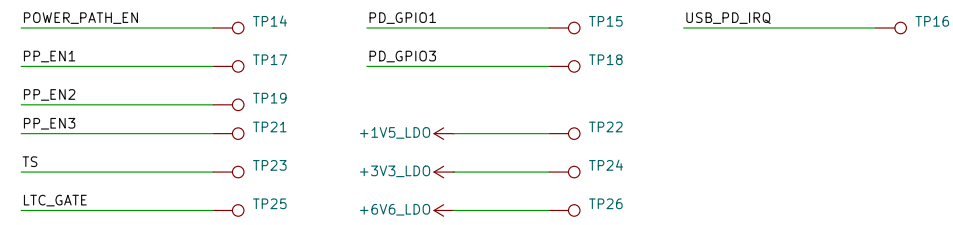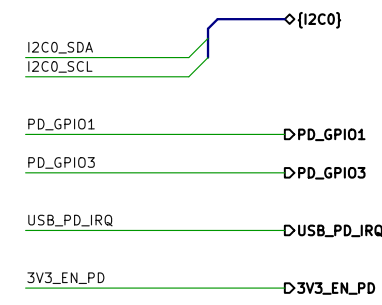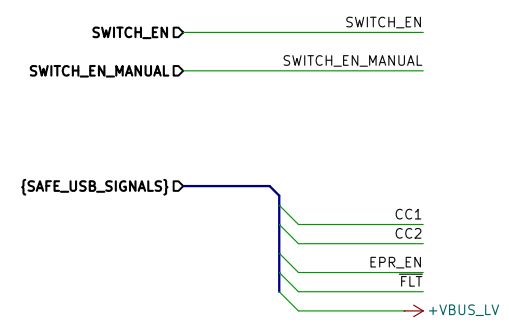

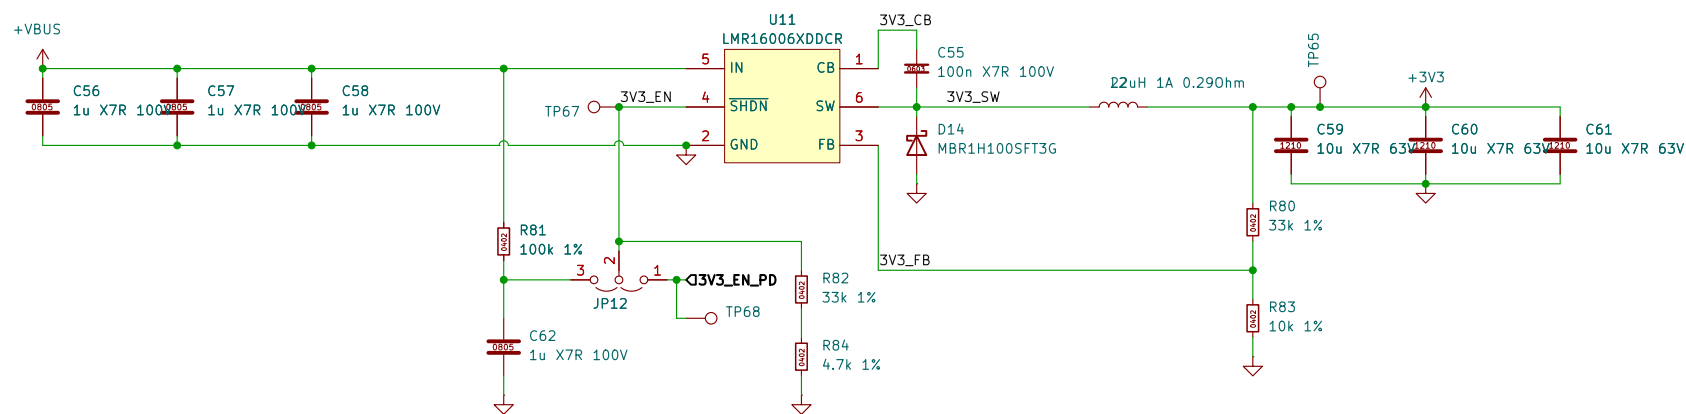

3.3V 600mA 700kHz Buck Regulator


Sheet: /LV-Supply/
File: LV-Supply.kicad_sch

Title:


Size: A4 Date:

KiCad E.D.A. 10.0.1

Rev:
Id: 6/7

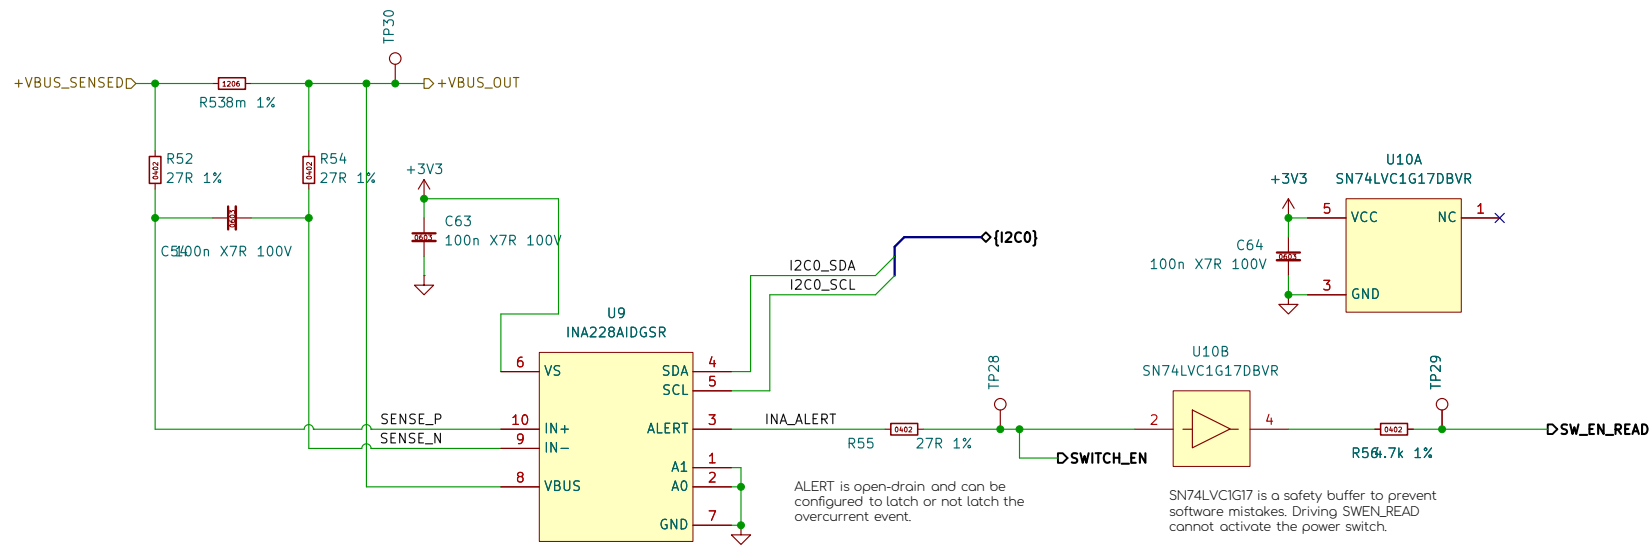

85-V, 20-Bit, Ultra-Precise Power/Energy/Charge Monitor With I²C Interface

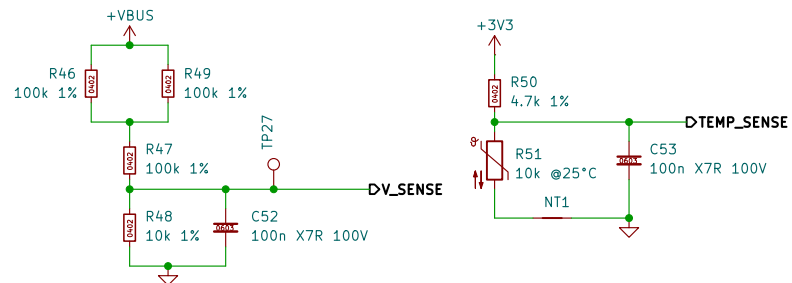

Sheet: /Power-Sense/
File: Power-Sense.kicad_sch

Title:

Size: A4
KiCad E.D.A. 10.0.1

Date:

Rev:
Id: 7/7