




TODO: Fix LV supply

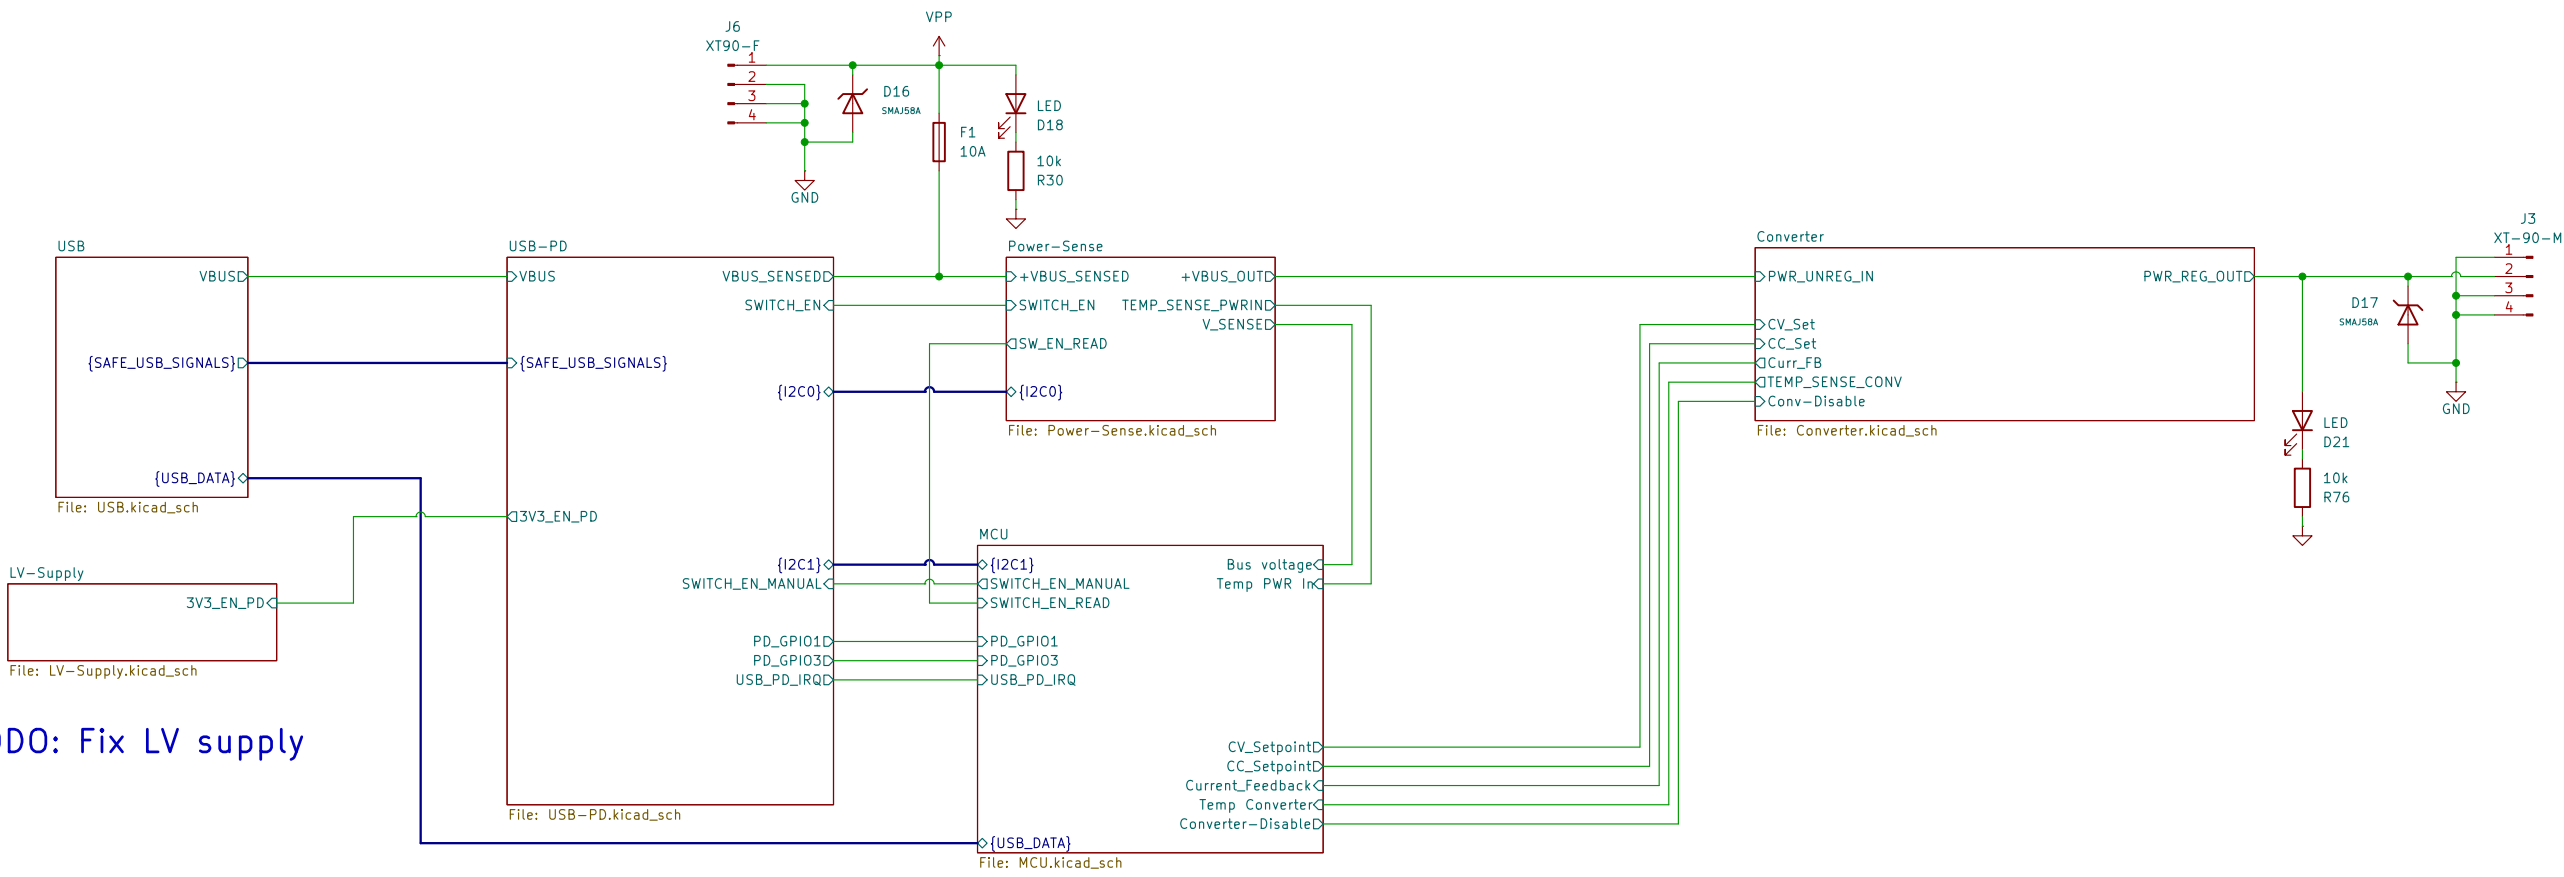

|                              |       |         |
|------------------------------|-------|---------|
| Sheet: /                     |       |         |
| File: nitride-nano.kicad_sch |       |         |
| Title:                       |       |         |
| Size: A3                     | Date: | Rev:    |
| KiCad E.D.A. 10.0.2          |       | Id: 1/7 |

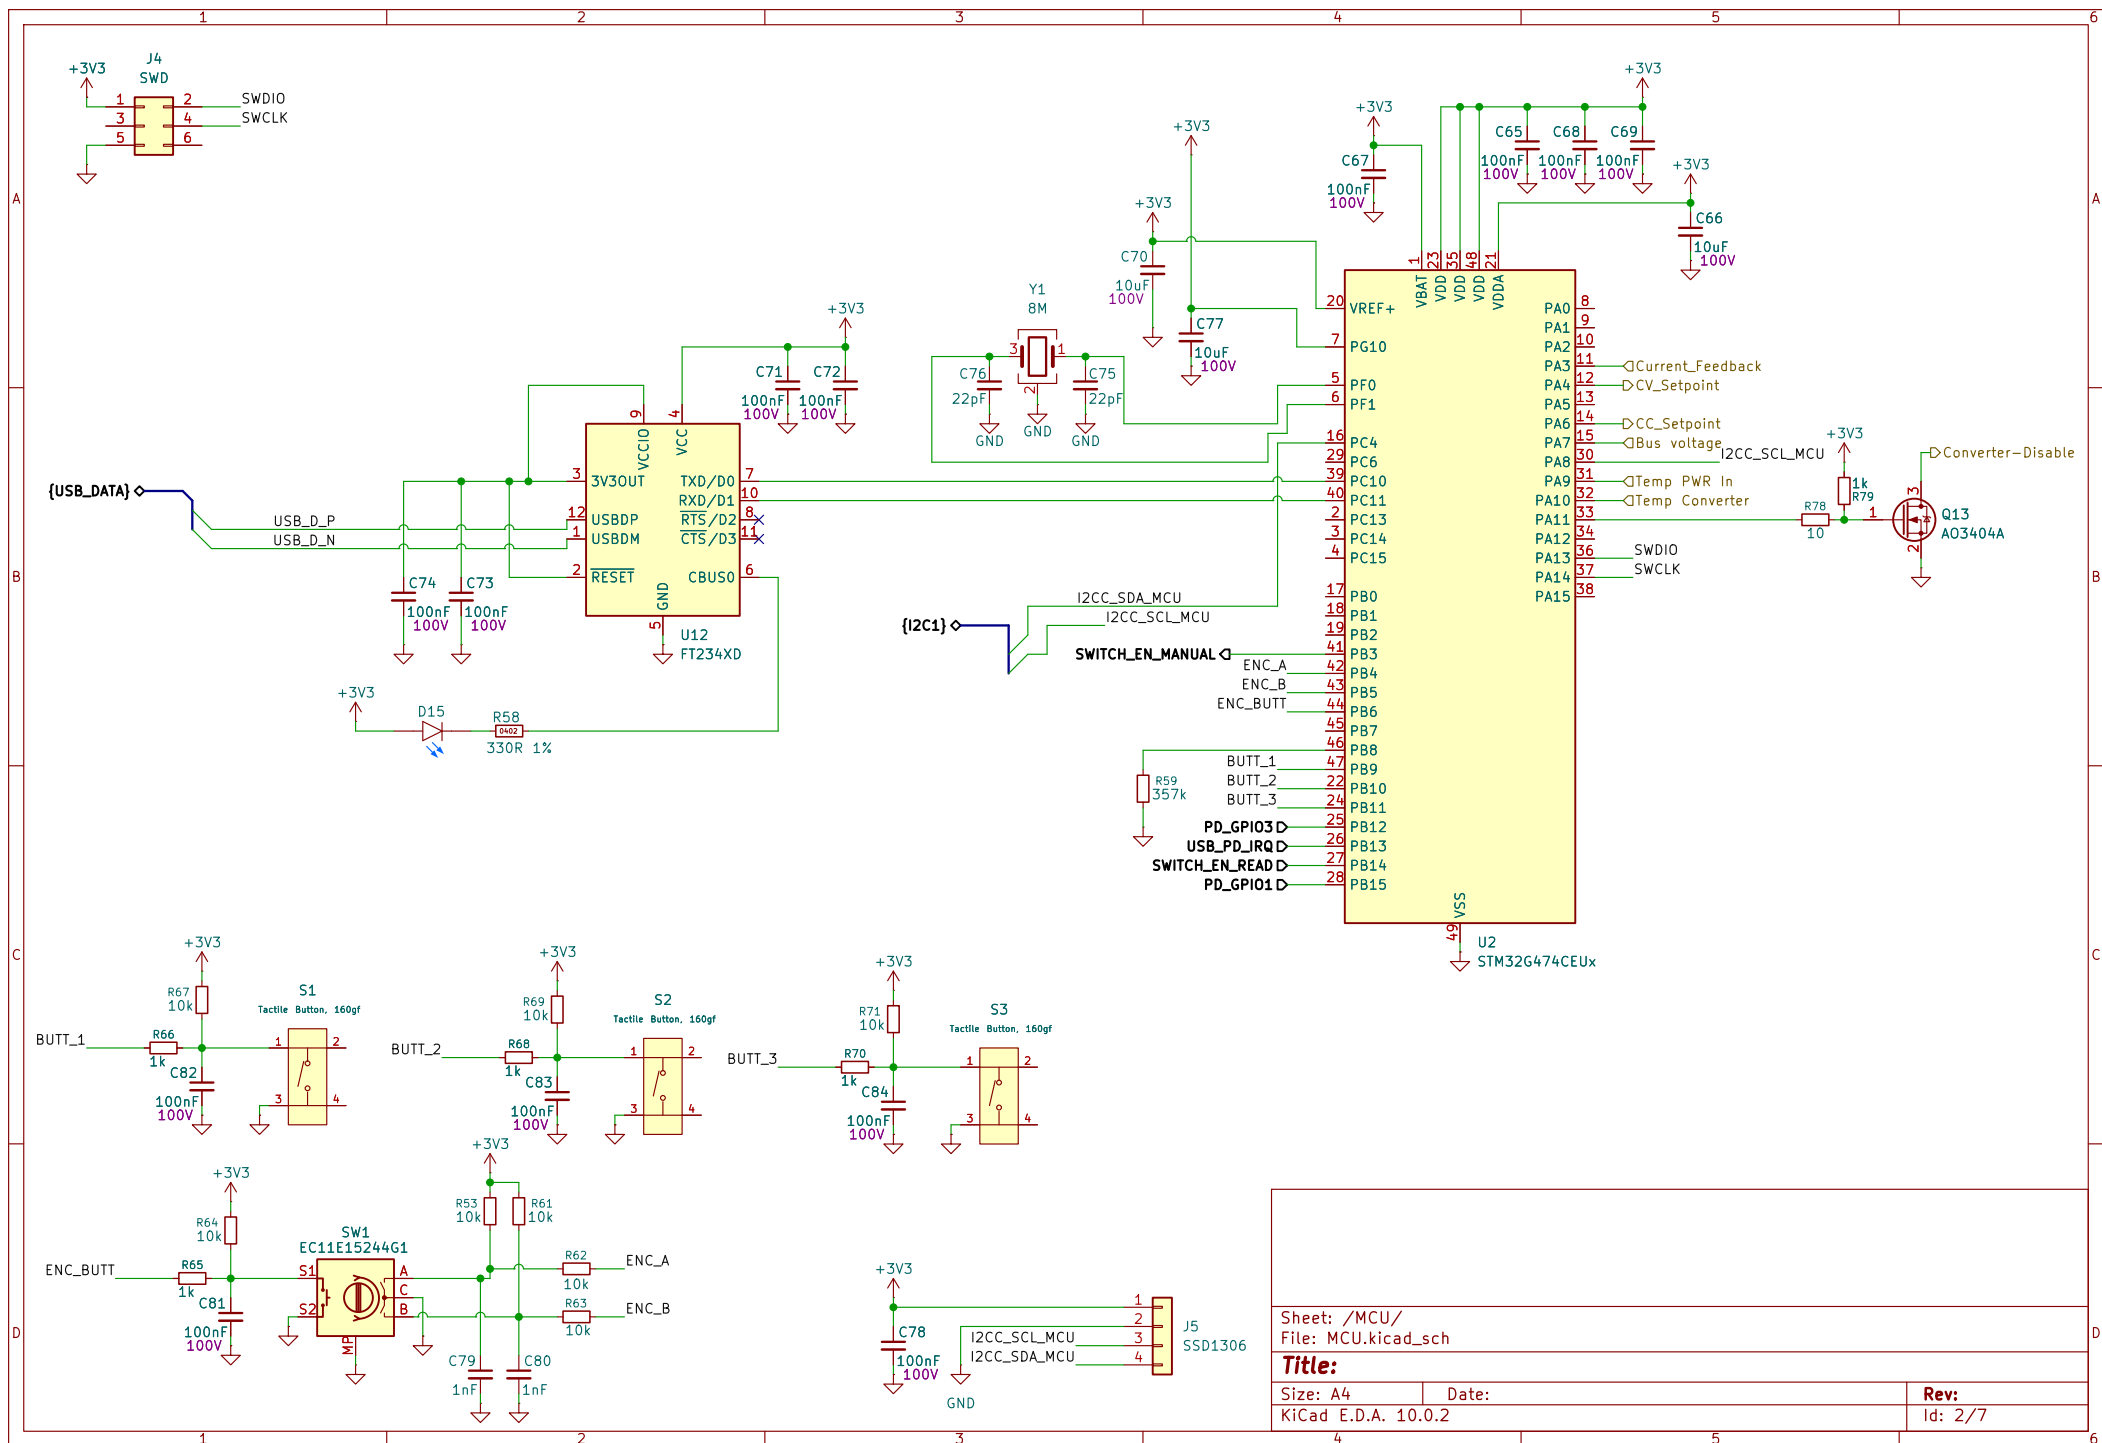


Sheet: /MCU/  
File: MCU.kicad\_sch

**Title:**


Size: A4  
KiCad E.D.A. 10.0.2

Date:


**Rev:**  
Id: 2/7

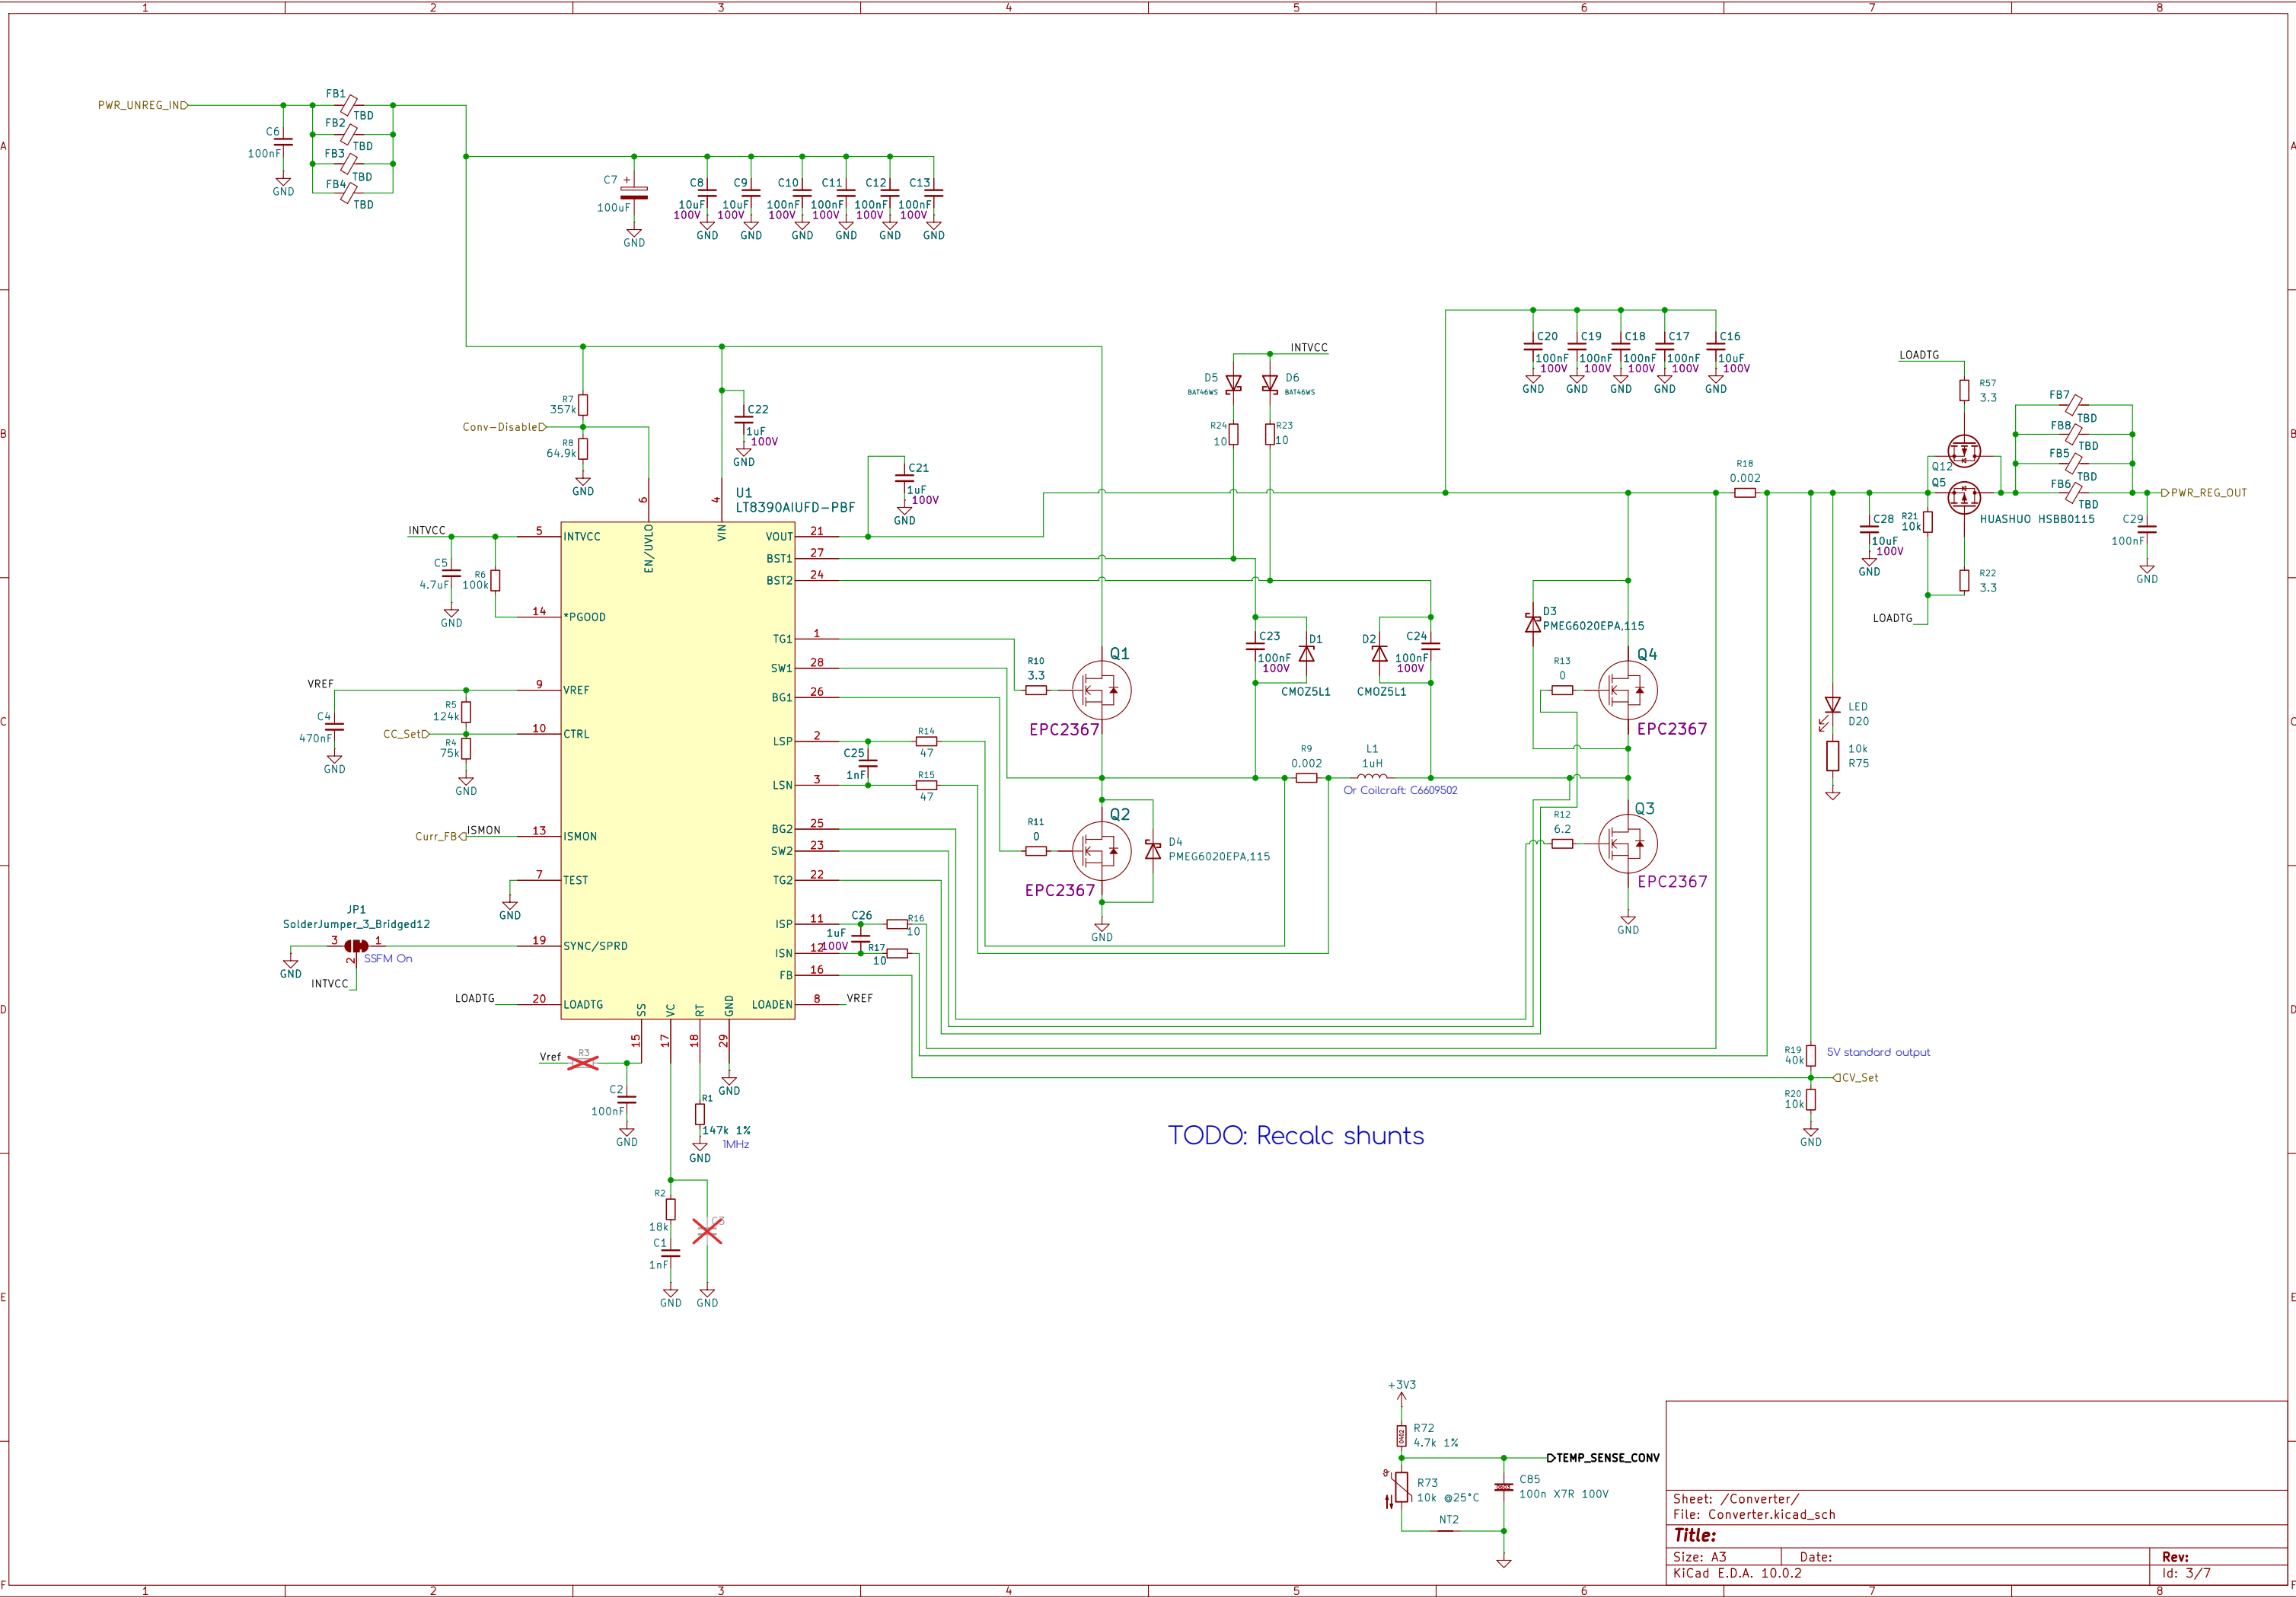


|                                                 |       |         |
|-------------------------------------------------|-------|---------|
| Sheet: /Converter/<br>File: Converter.kicad_sch |       |         |
| <b>Title:</b>                                   |       |         |
| Size: A3                                        | Date: | Rev:    |
| KiCad E.D.A. 10.0.2                             |       | Id: 3/7 |

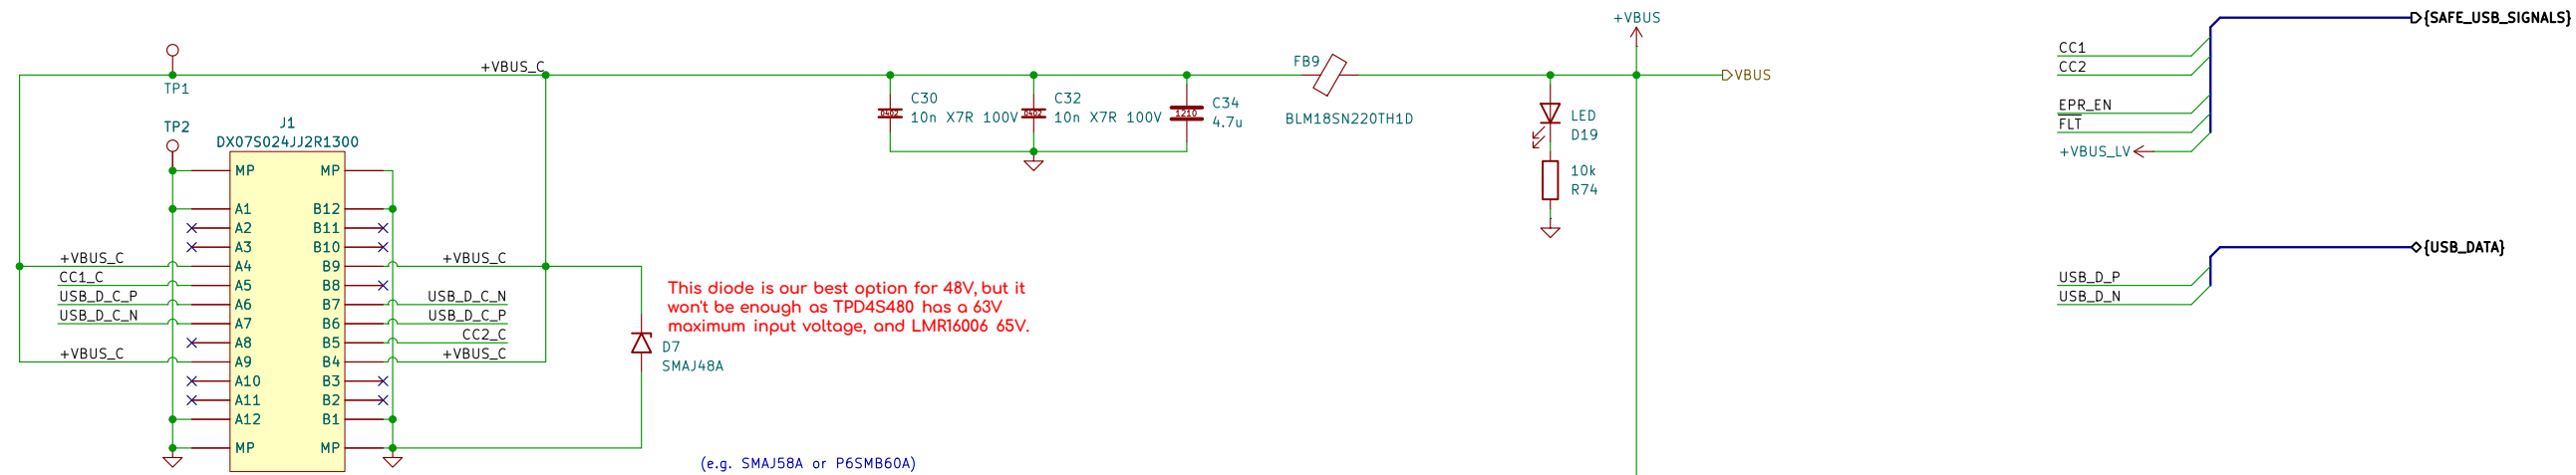

USB-C 3.2 Gen2 48V 5A SMD receptacle

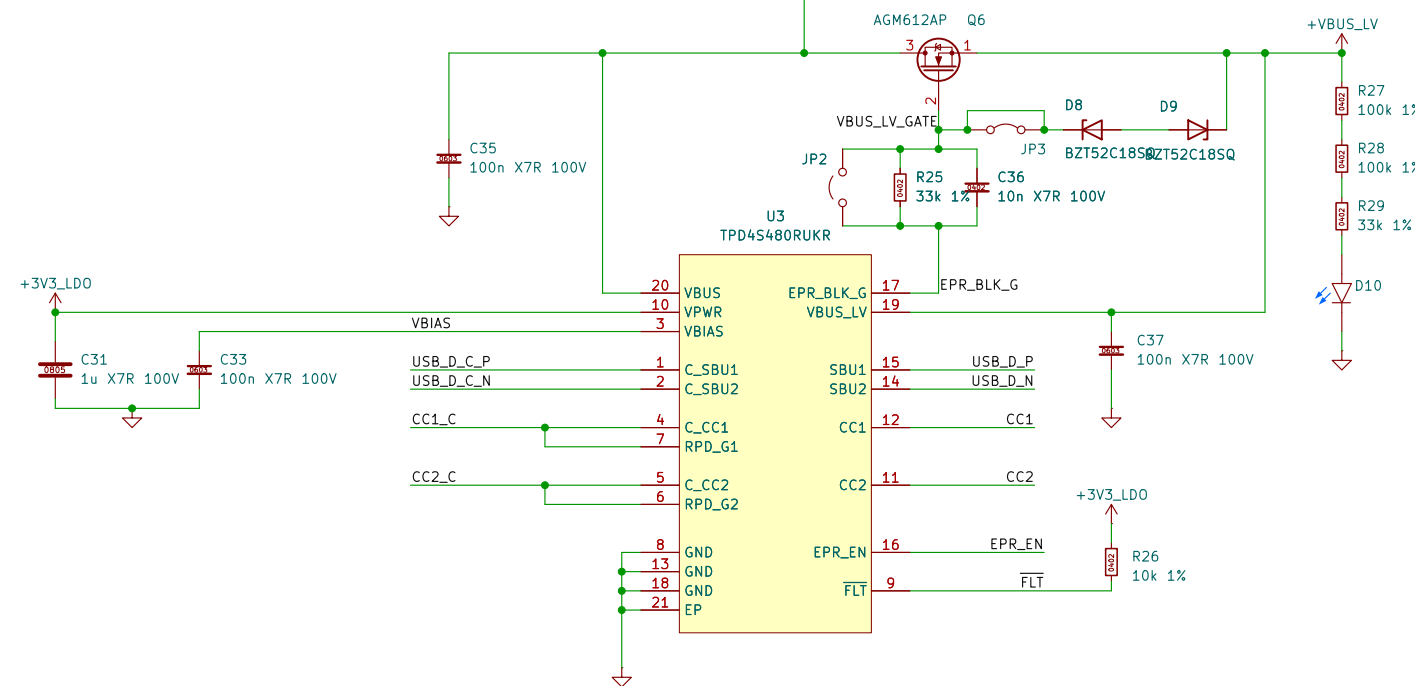


USB Type-C™ 48V EPR port protector with short-to-VBUS overvoltage and IEC ESD protection



Test Points


DESIGN NOTE:  
3V3 LDO total current needs to be lower than 5mA at startup:  
EEPROM read: 1mA  
POWER OK LED: 0.65mA  
TPD4S480: 0.16mA  
LM2765: 0.13mA  
LTC7004: 0.05mA  
I<sup>2</sup>C pull-ups: ~0.5mA  
ADC resistors: 0.02mA  
AND gate: <0.01mA  
Total ~2.5mA < 5mA

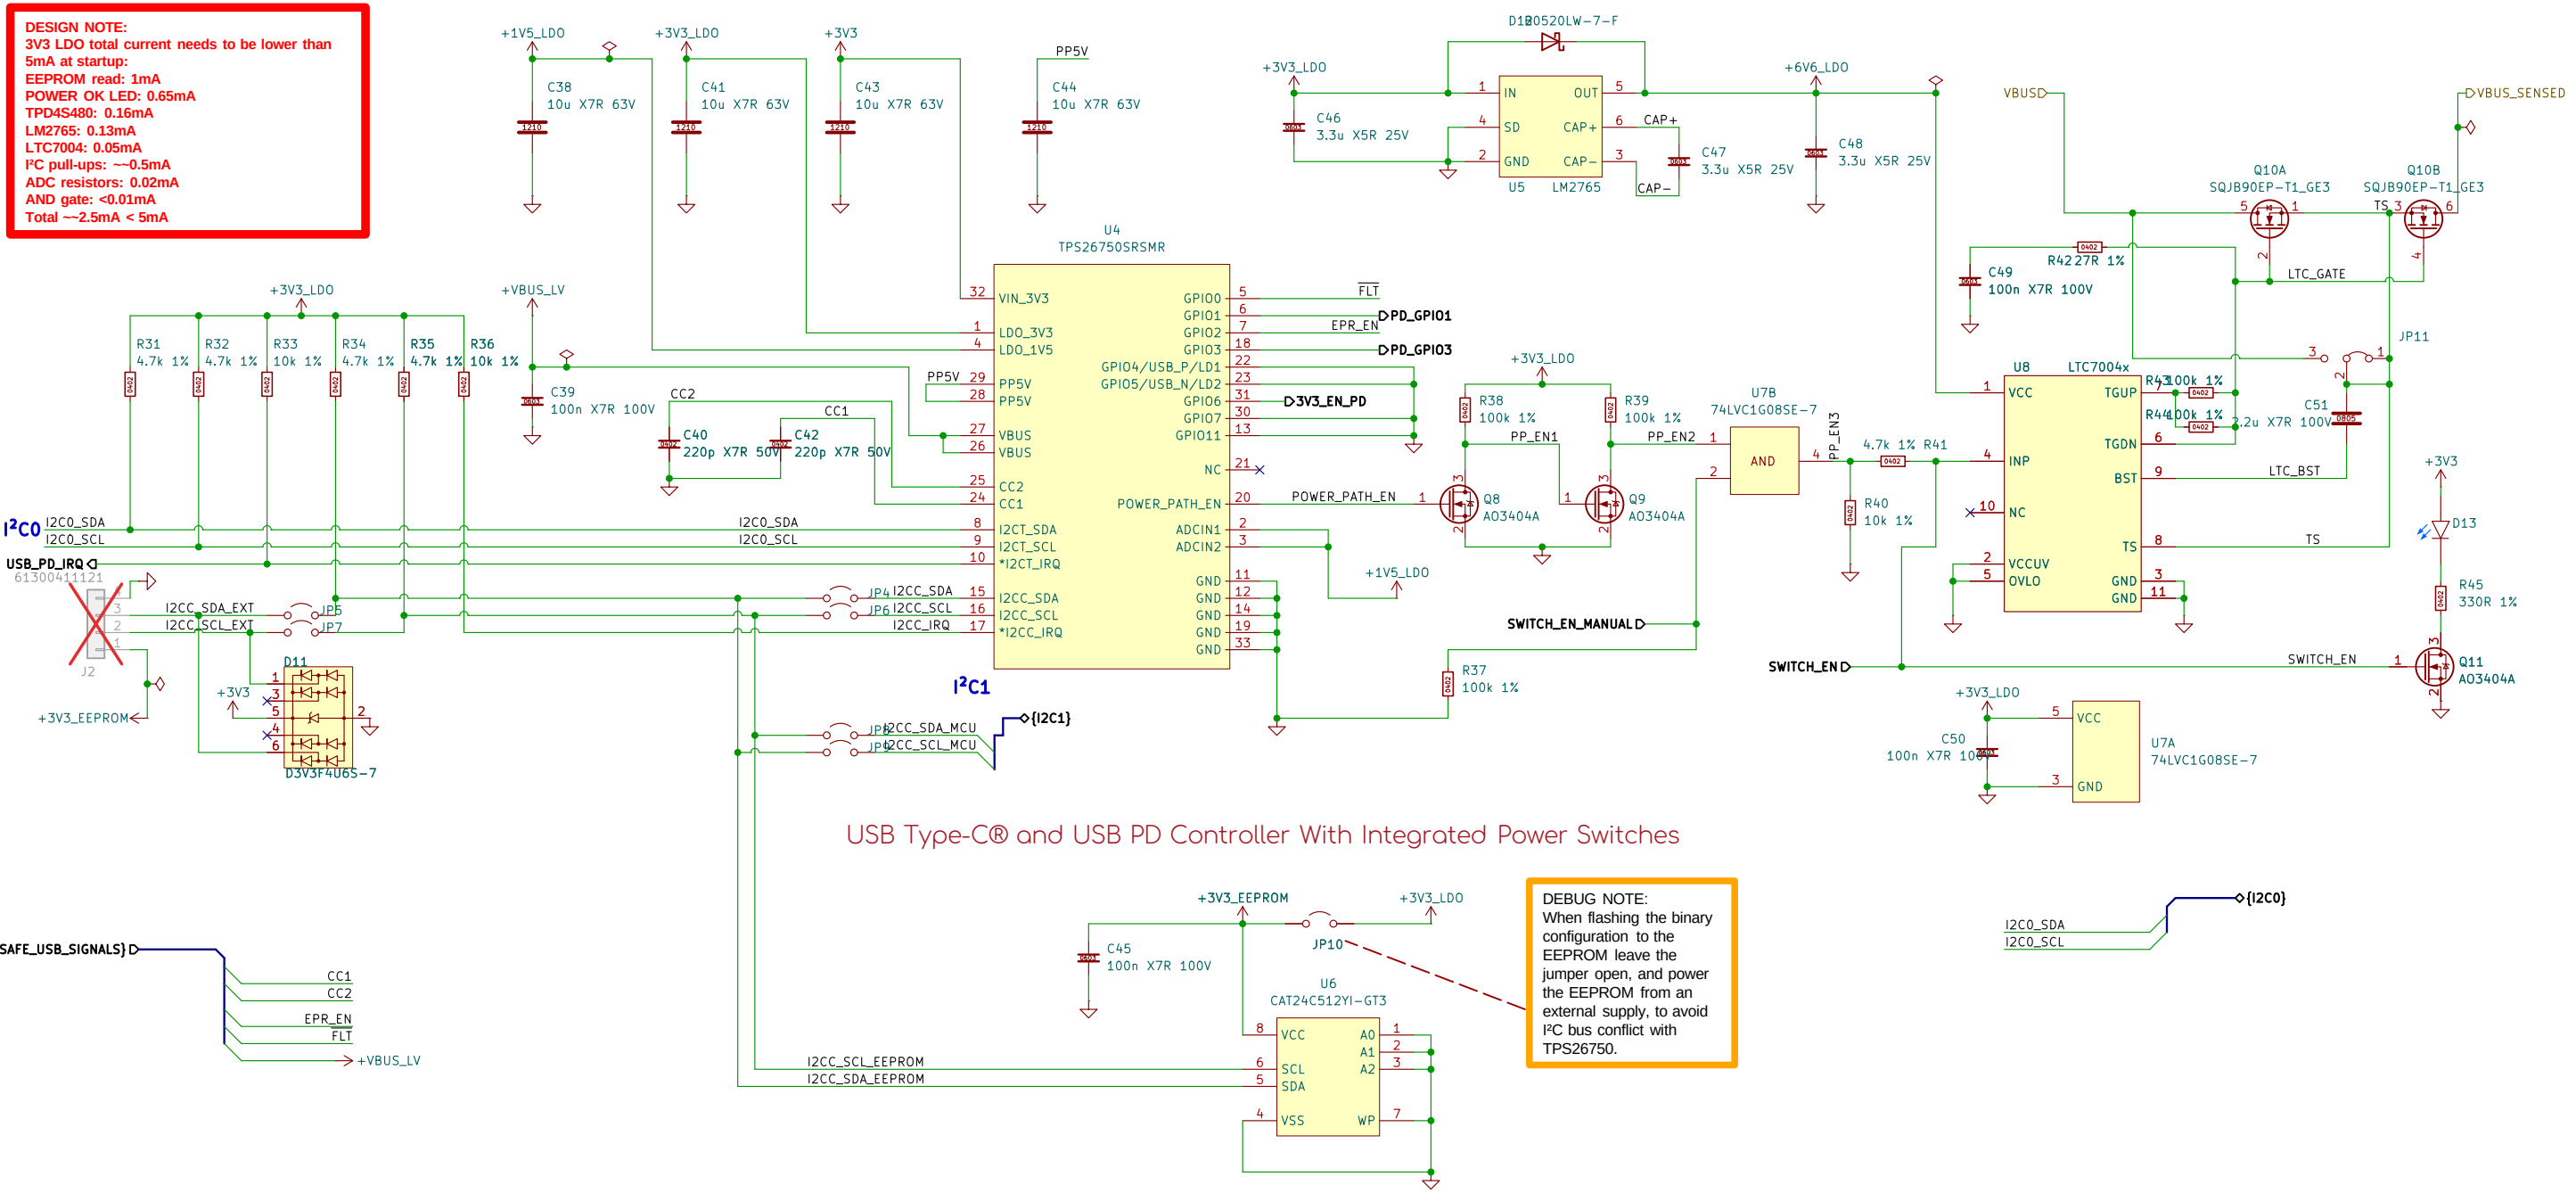

USB Type-C® and USB PD Controller With Integrated Power Switches

DEBUG NOTE:  
When flashing the binary configuration to the EEPROM leave the jumper open, and power the EEPROM from an external supply, to avoid I<sup>2</sup>C bus conflict with TPS26750.

- |               |      |          |      |            |      |
|---------------|------|----------|------|------------|------|
| POWER_PATH_EN | TP14 | PD_GPI01 | TP15 | USB_PD_IRQ | TP16 |
| PP_EN1        | TP17 | PD_GPI03 | TP18 |            |      |
| PP_EN2        | TP19 |          |      |            |      |
| PP_EN3        | TP21 | +1V5_LDO | TP22 |            |      |
| TS            | TP23 | +3V3_LDO | TP24 |            |      |
| LTC_GATE      | TP25 | +6V6_LDO | TP26 |            |      |

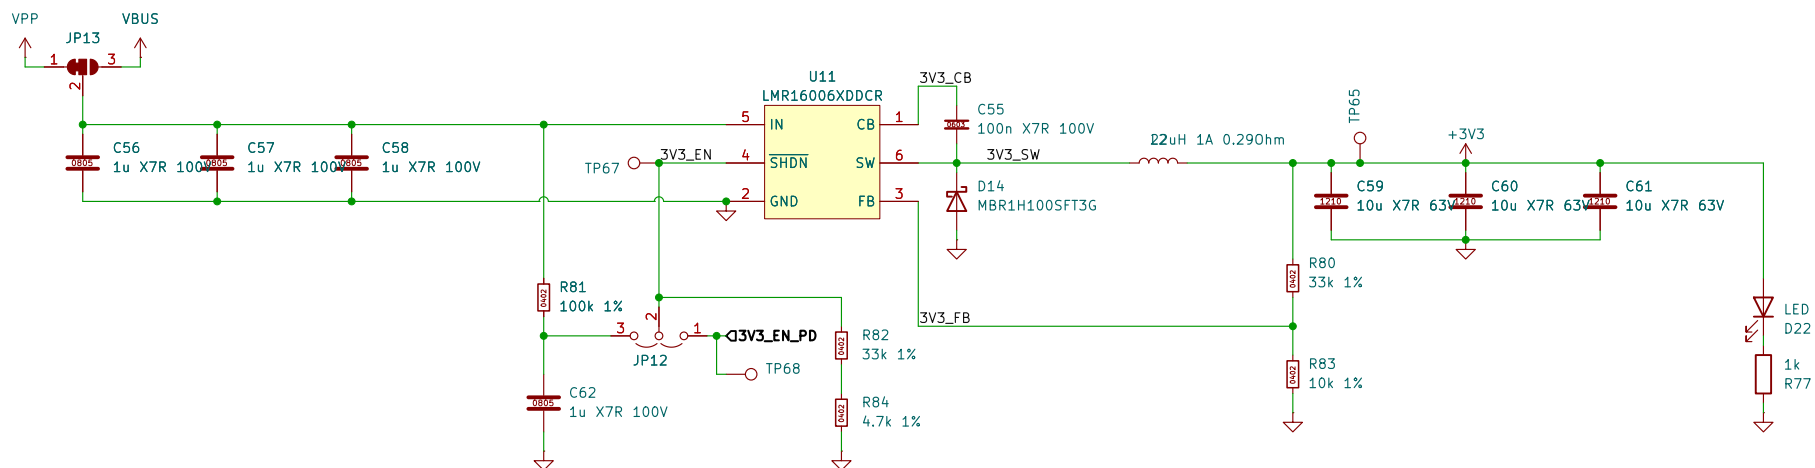

3.3V 600mA 700kHz Buck Regulator


Sheet: /LV-Supply/  
File: LV-Supply.kicad\_sch

**Title:**

Size: A4  
KiCad E.D.A. 10.0.2

Date:

**Rev:**  
Id: 6/7

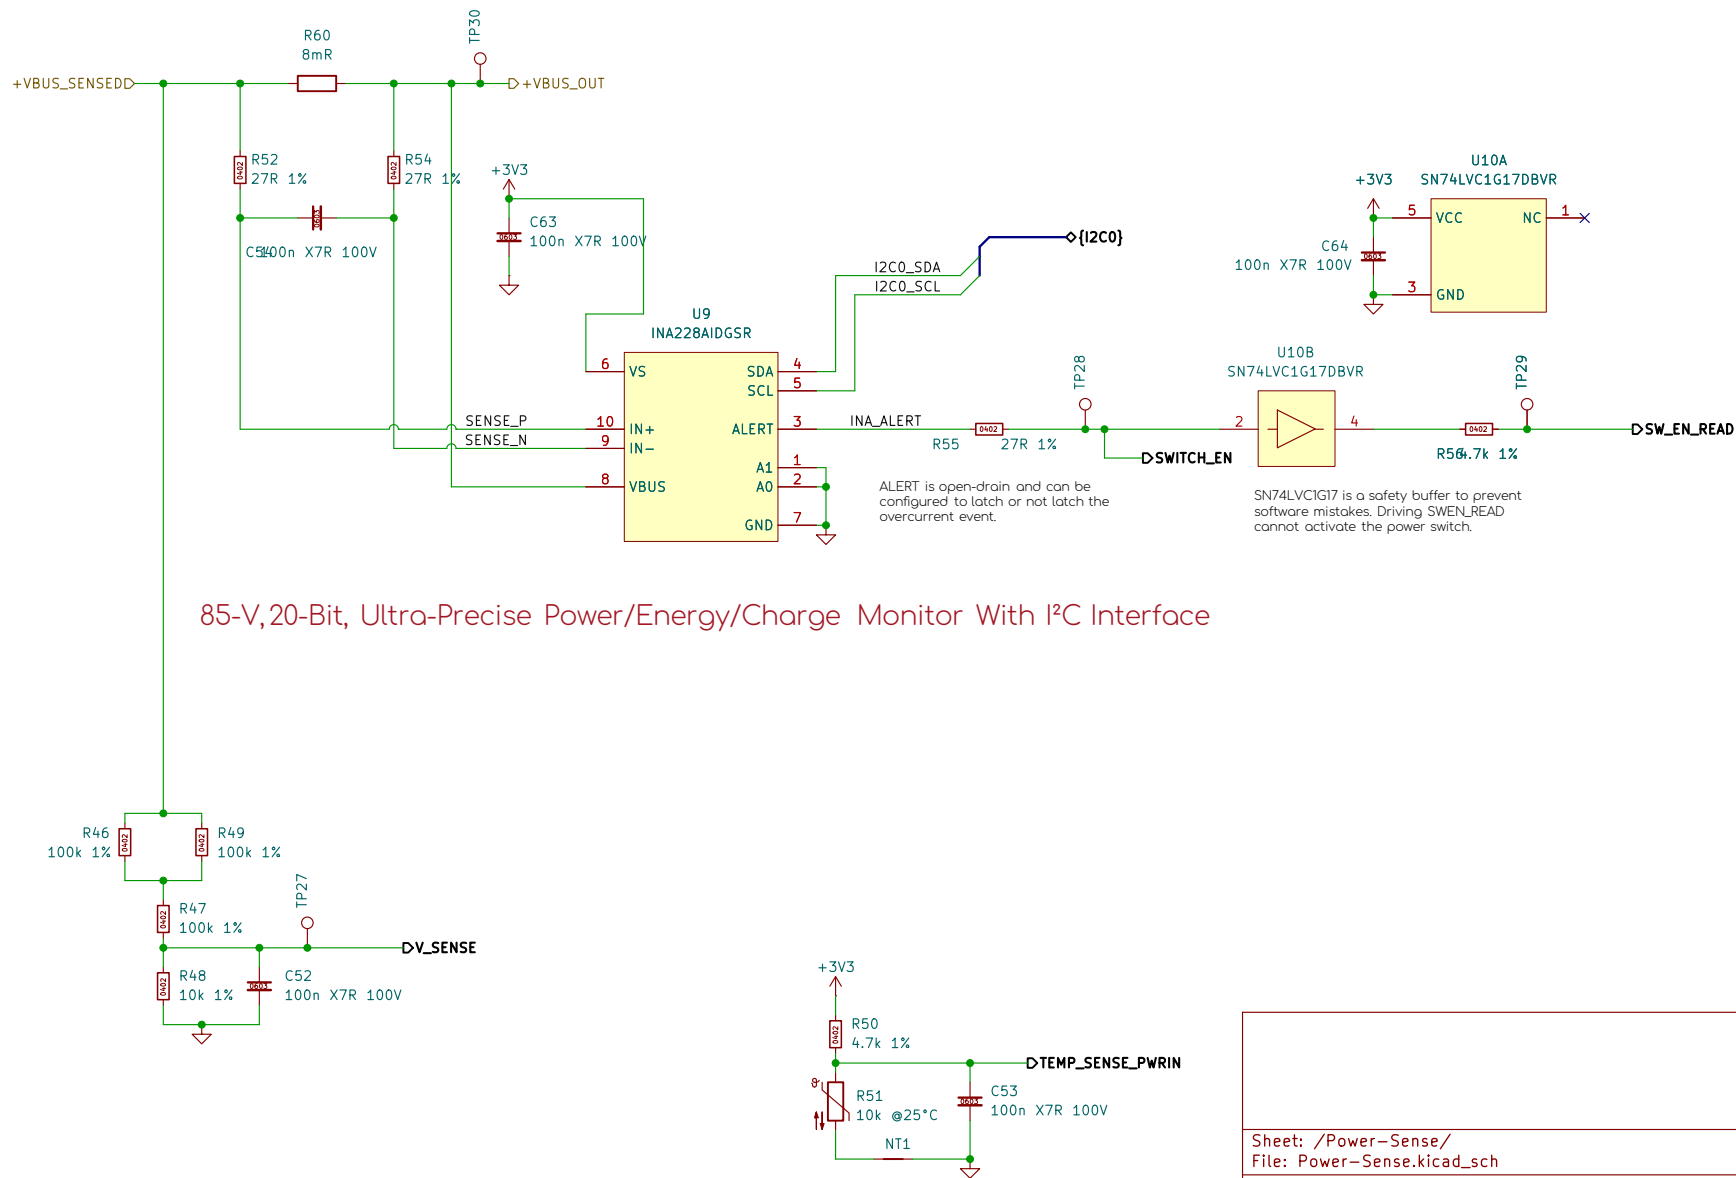

Sheet: /Power-Sense/  
File: Power-Sense.kicad\_sch

**Title:**

Size: A4

Date:

KiCad E.D.A. 10.0.2

Rev:

Id: 7/7