

123456

A

Power input (USB-C) and regulators

File: lcd_board_power.kicad_sch

HDMI receiver LT8619C

File: lcd_board_hdmi.kicad_sch

B

AT070TN92 panel, bias supplies, VCOM, backlight

File: lcd_board_panel.kicad_sch

STM32F072 controller and GT915 touch

File: lcd_board_mcu.kicad_sch

C

AT070TN92 7" 800x480 TTL panel driver: HDMI (LT8619C) + GT915 touch -> USB HID (STM32F072).

Power: USB-C 5 V (from Raspberry Pi USB port, ~0.7 A max with backlight at 100 %).

Panel power-up order (MCU controlled): DVDD -> RESET -> VGL/AVDD -> VGH -> data -> backlight.

J3 pad numbers equal AT070TN92 FPC pin numbers; use a TOP-contact 0.5 mm 50-pin FPC connector.

VCOM (pins 6/46) is adjustable with RV1 (2.55..4.5 V): trim for minimum flicker.

D

LT8619C HDMI->RGB888, TPS61040 bias, TPS61165 backlight, STM32F072 USB touch

Sheet: /
File: lcd_board.kicad_sch


Title: AT070TN92 HDMI + USB-touch driver board

Size: A4Date: 2026-10-02

KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4

Rev: 1.0Id: 1/5

123456

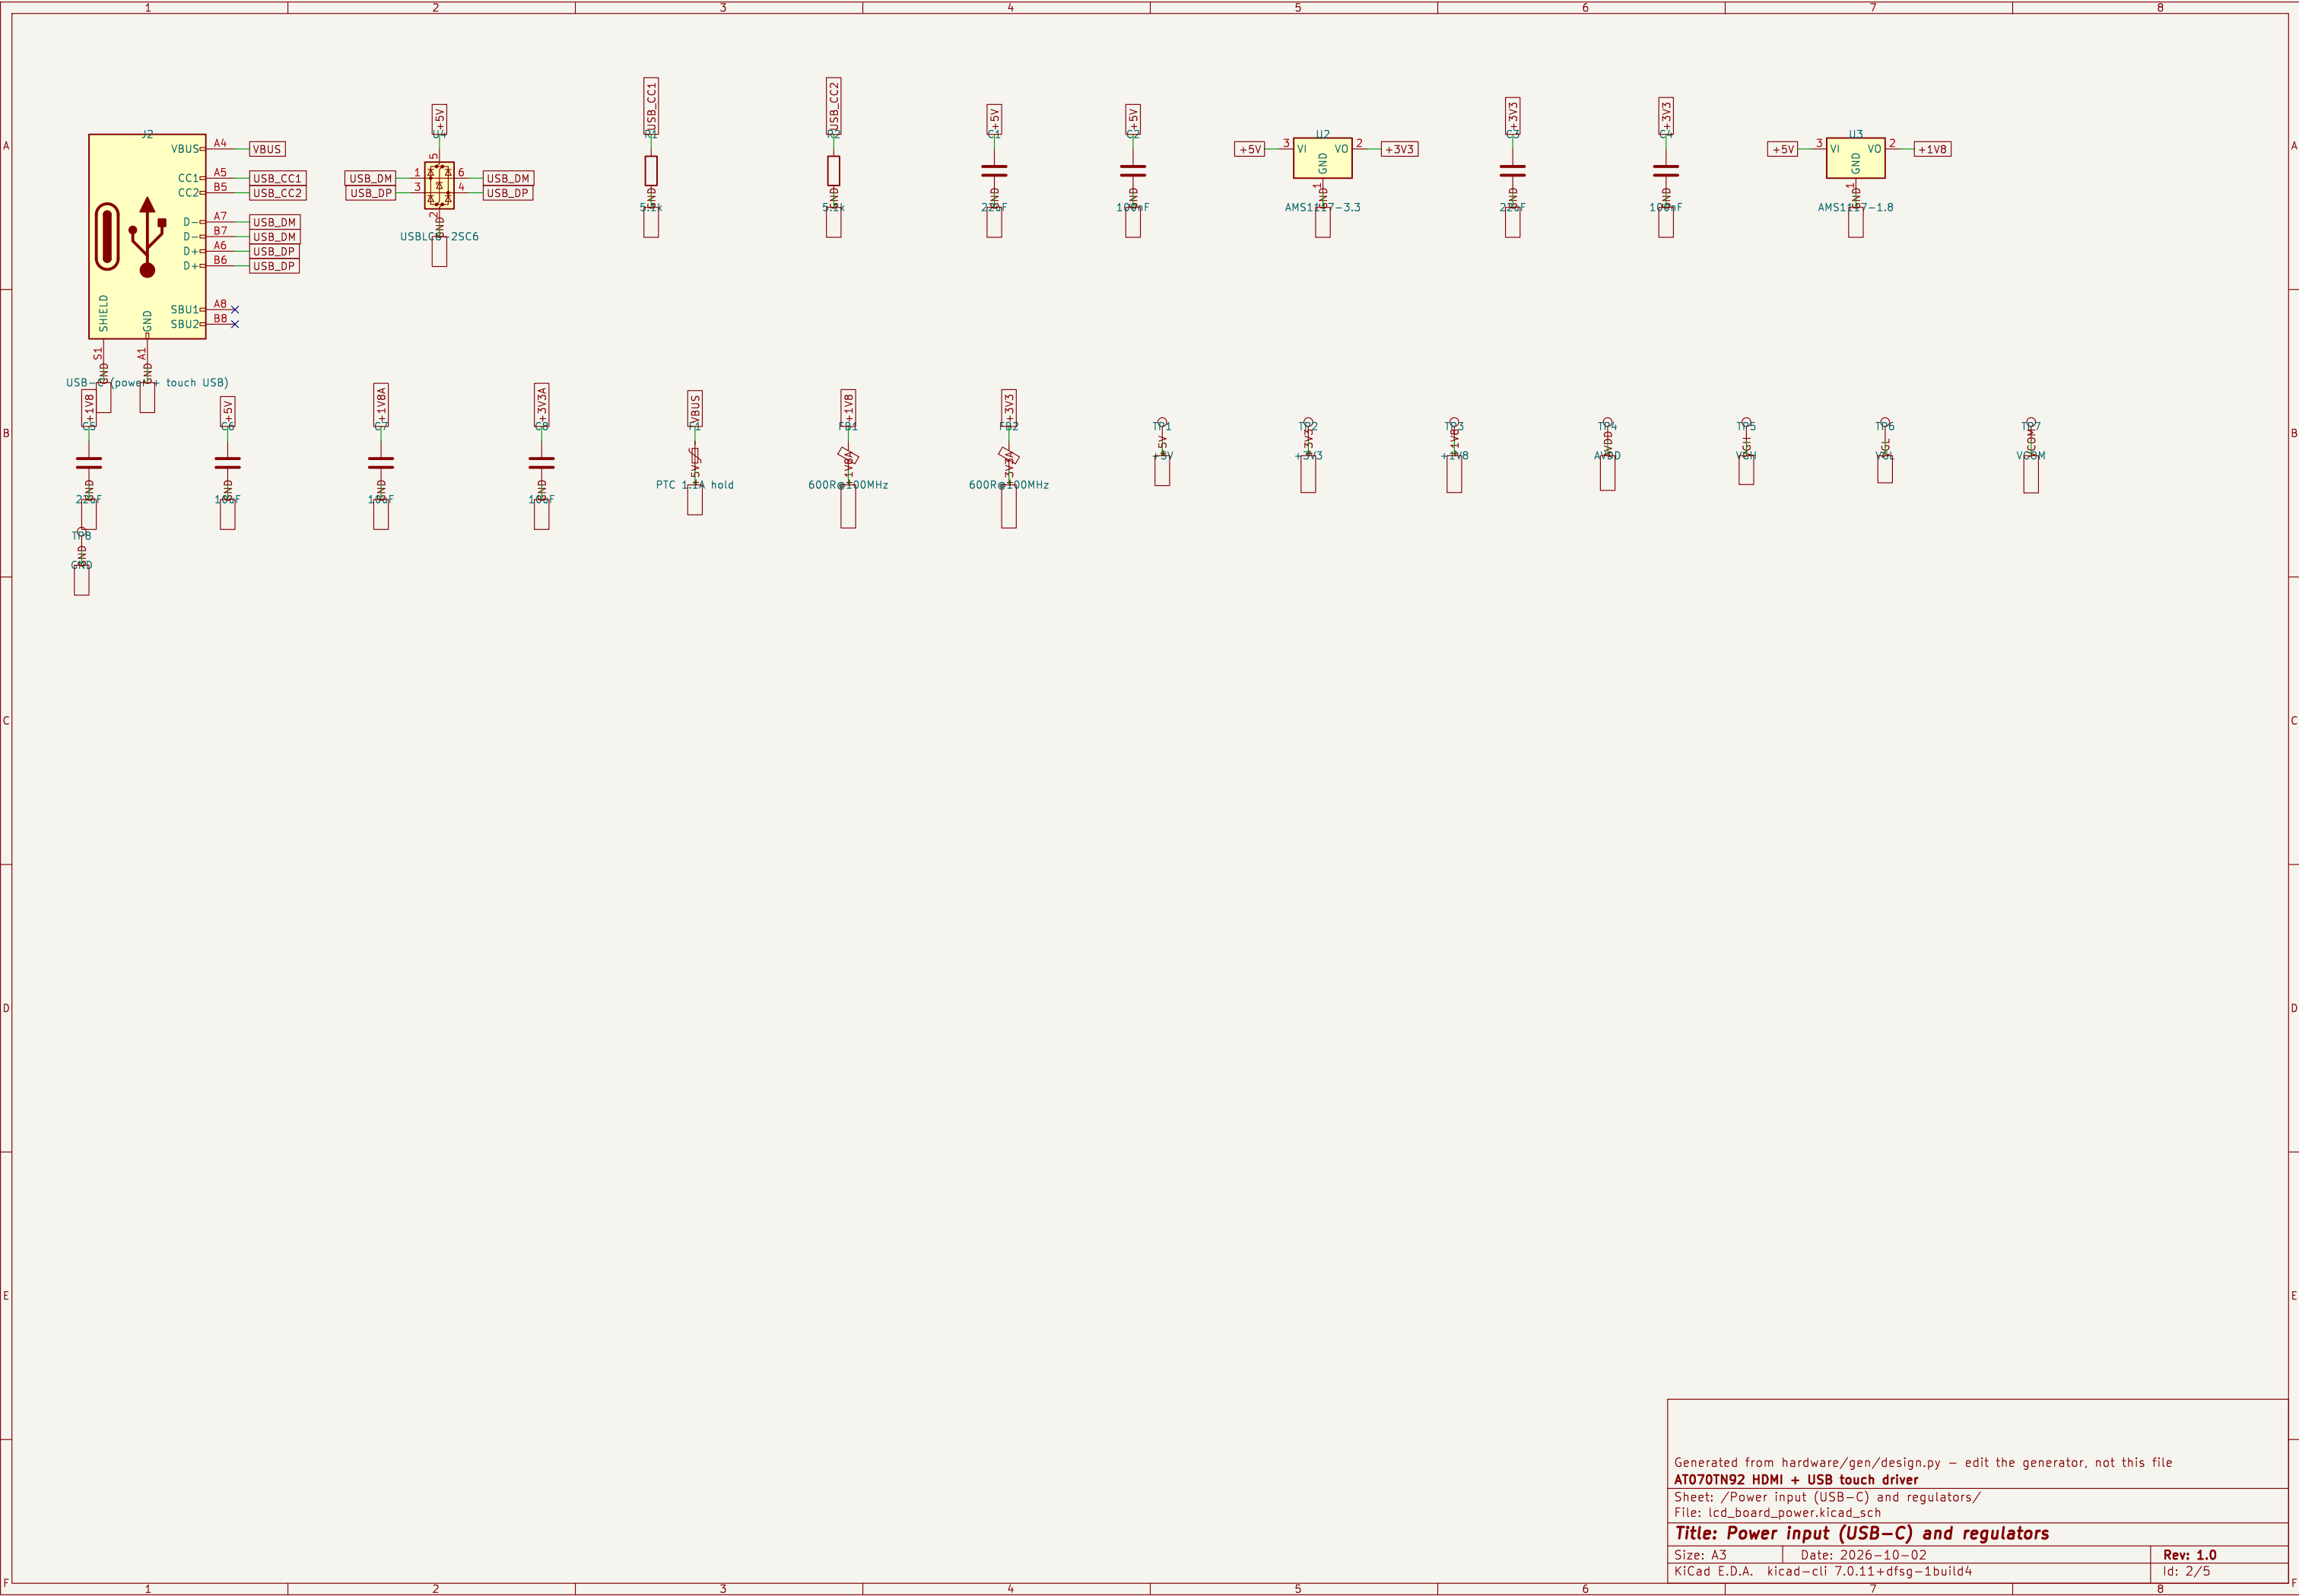

Generated from hardware/gen/design.py – edit the generator, not this file

AT070TN92 HDMI + USB touch driver

Sheet: /Power input (USB-C) and regulators/

File: lcd_board_power.kicad_sch


Title: Power input (USB-C) and regulators


Size: A3 Date: 2026-10-02

Rev: 1.0

KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4

Id: 2/5

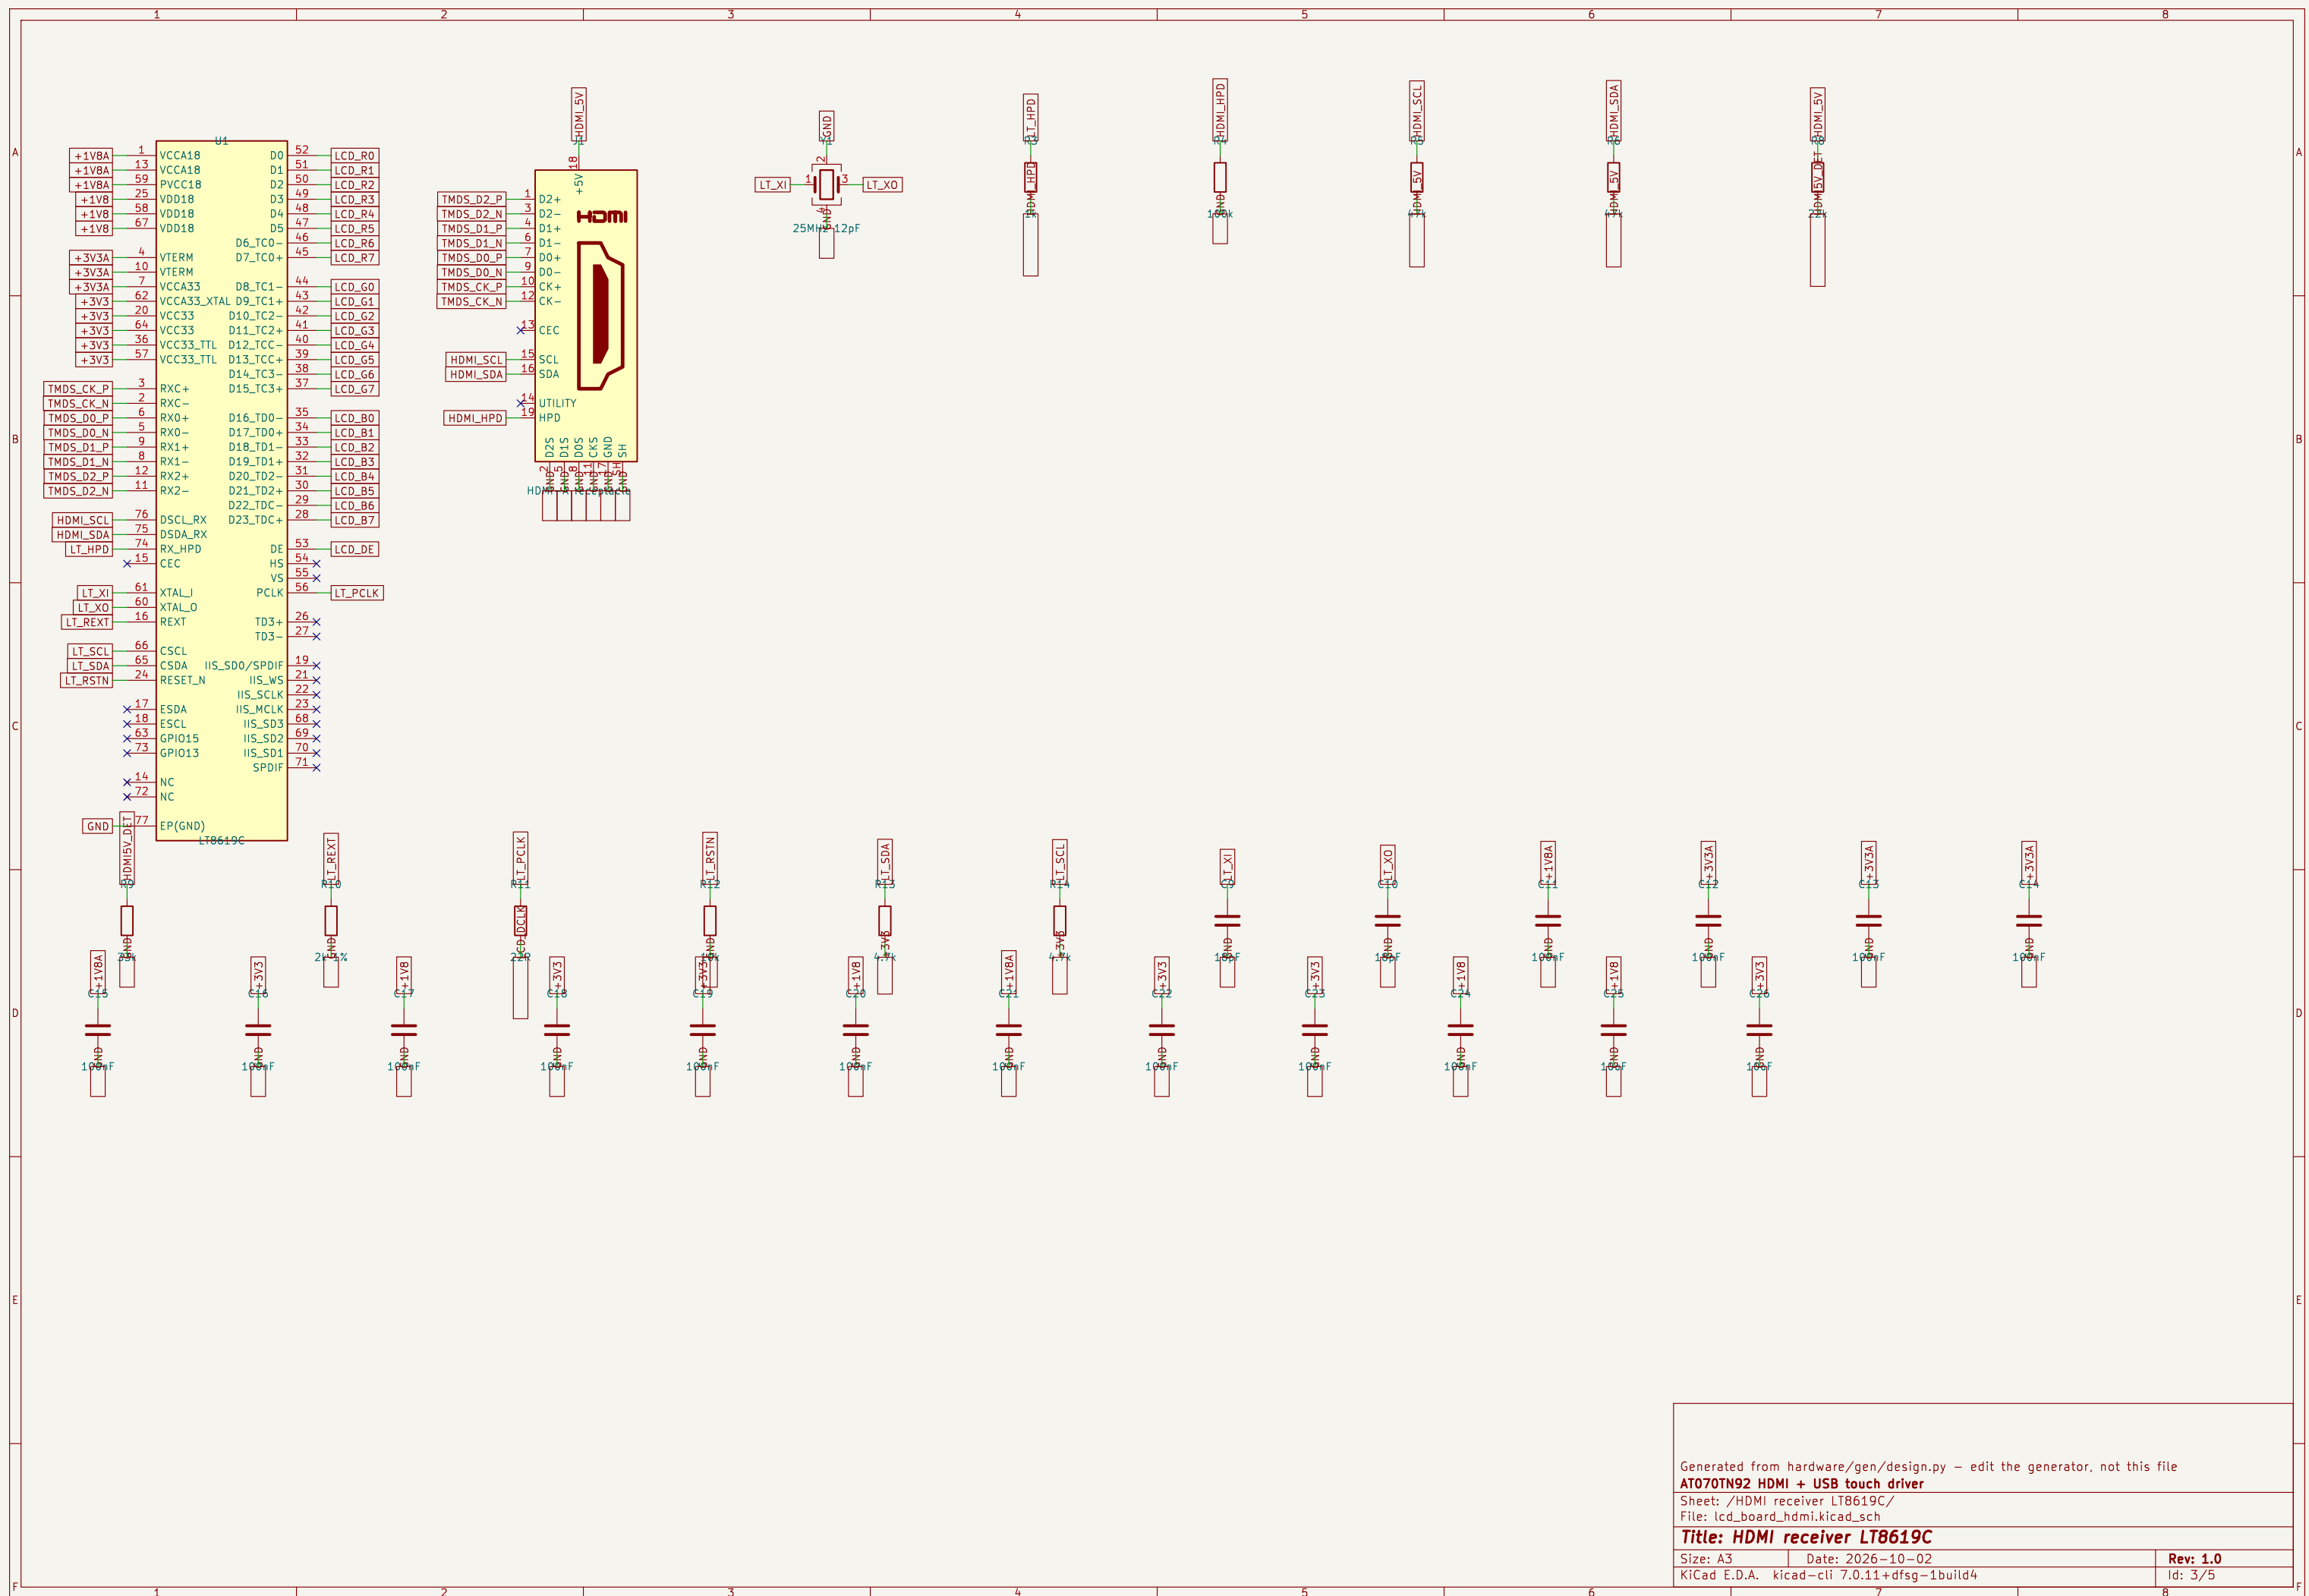

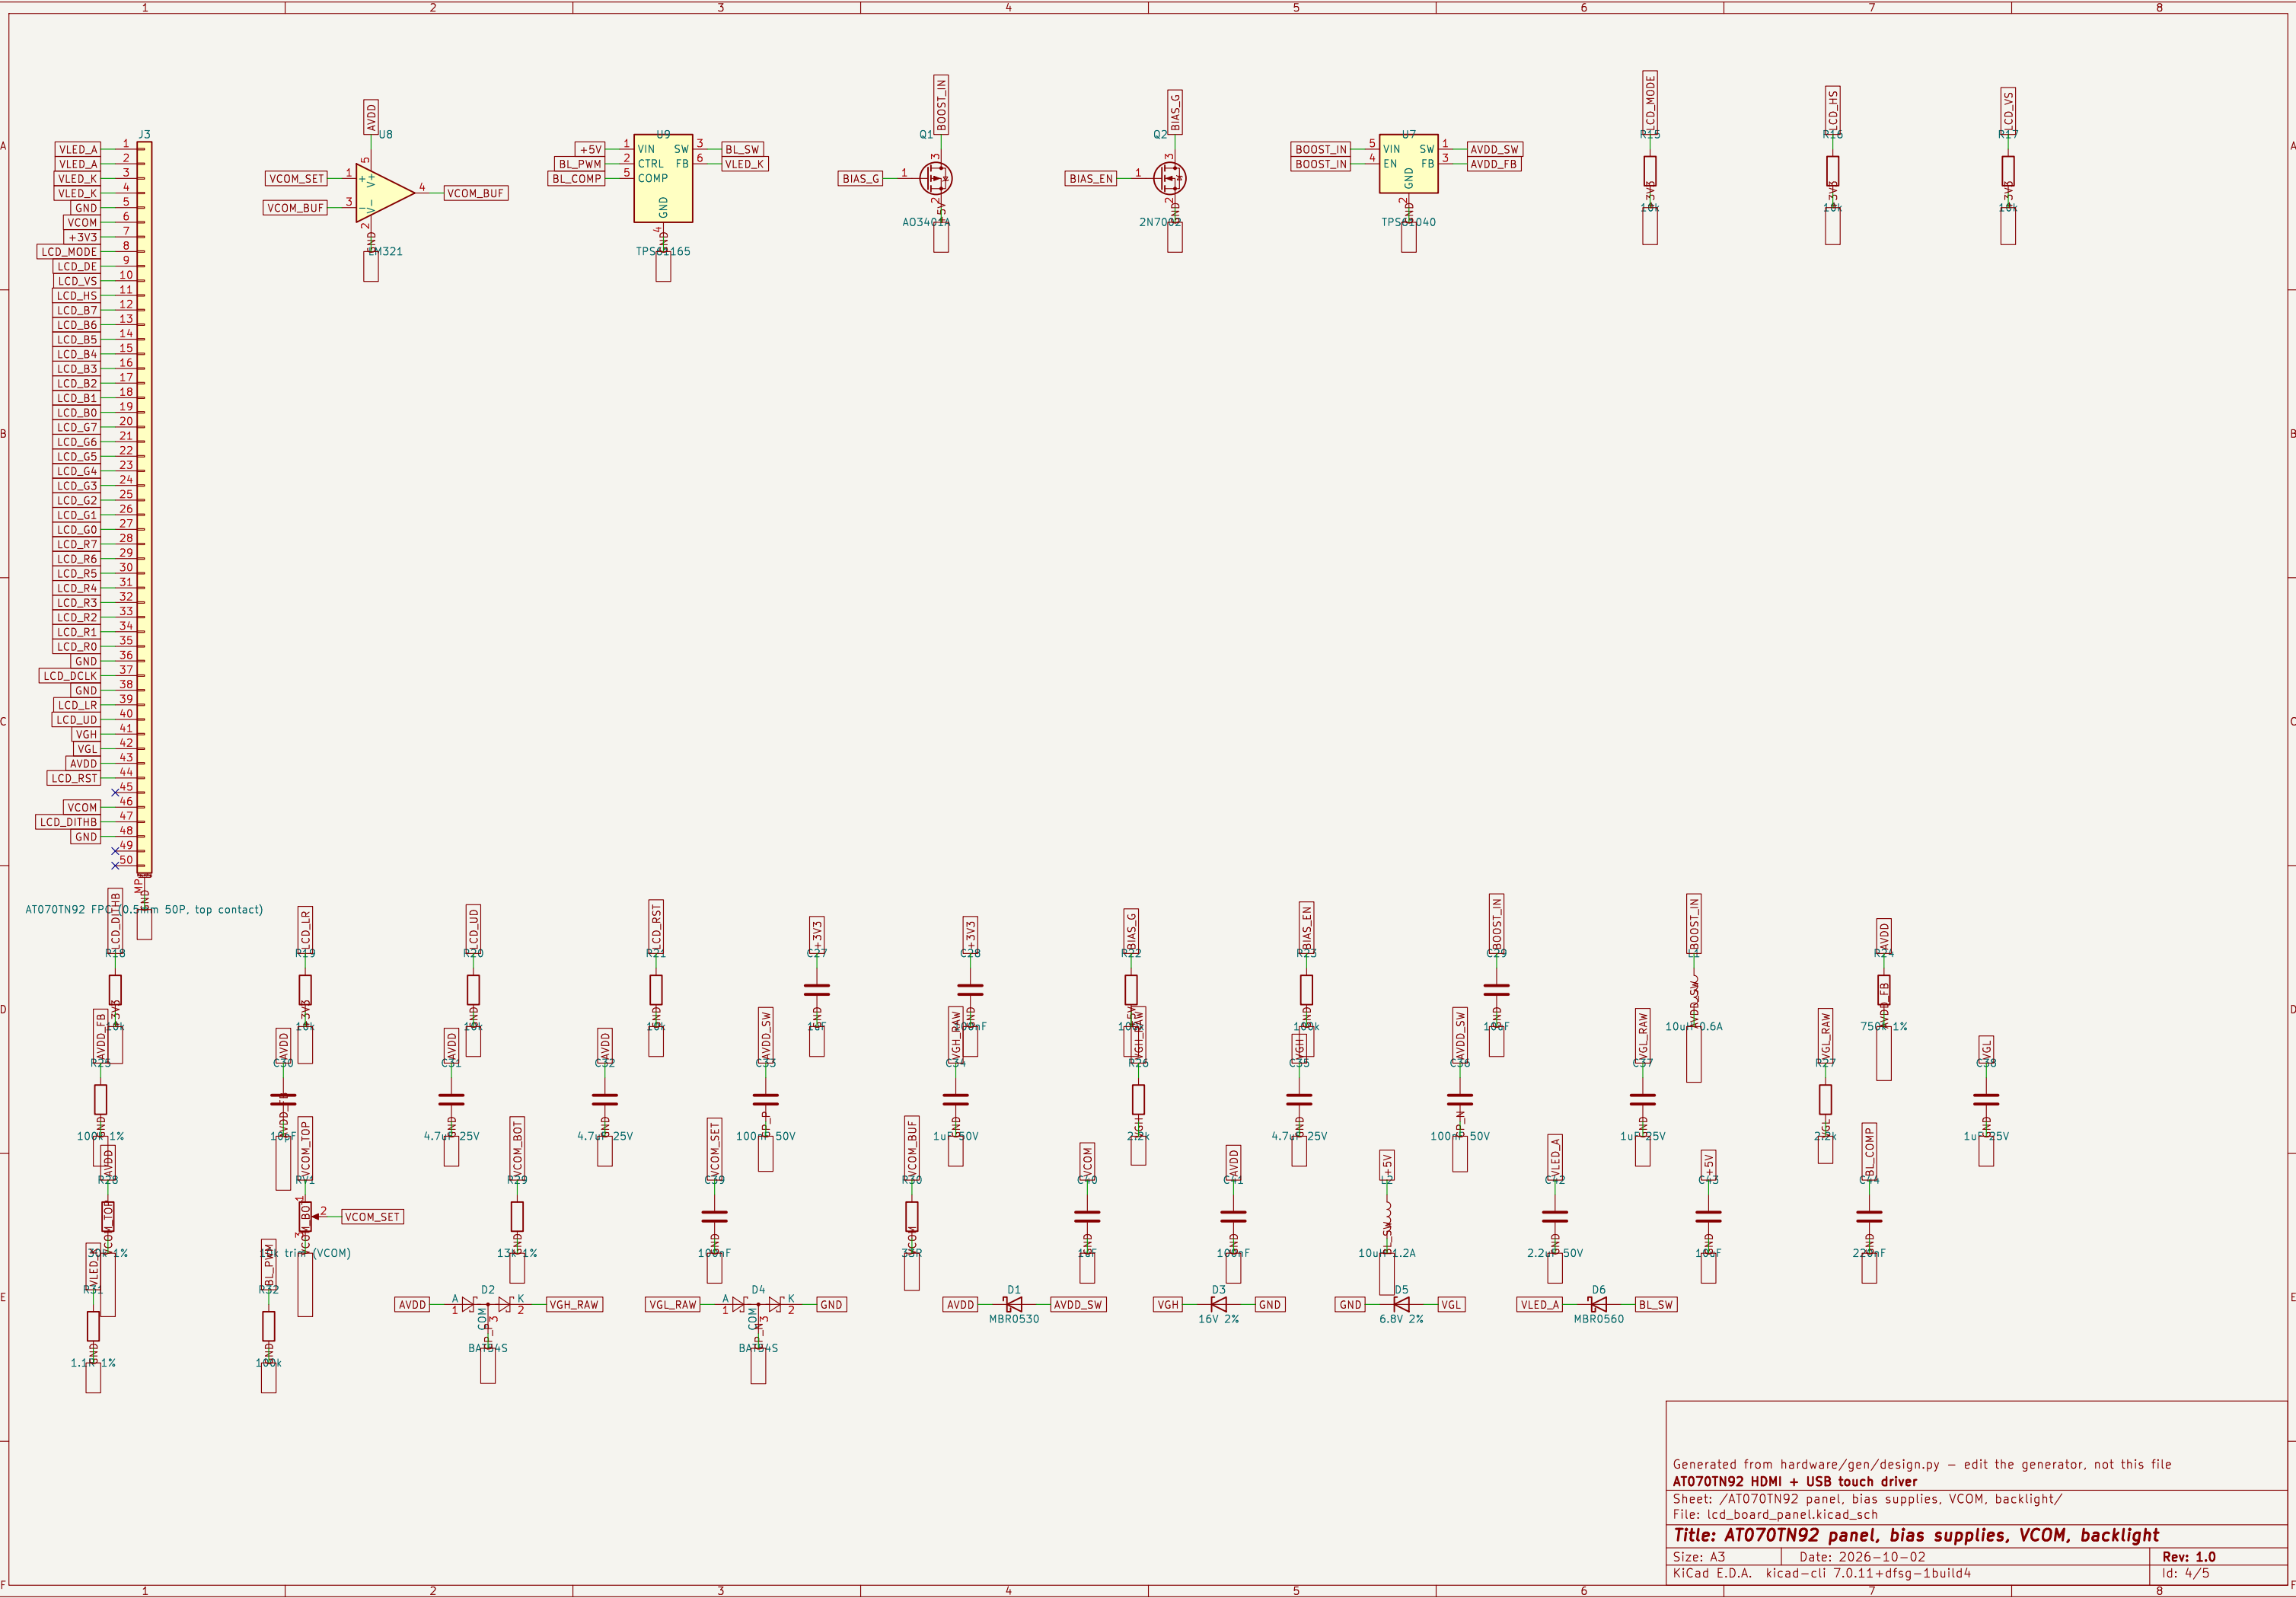



Generated from hardware/gen/design.py – edit the generator, not this file

AT070TN92 HDMI + USB touch driver

Sheet: /STM32F072 controller and GT915 touch/

File: lcd_board_mcu.kicad_sch

Title: STM32F072 controller and GT915 touch

Size: A3	Date: 2026-10-02	Rev: 1.0
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4	Id: 5/5	