

CALYPSO — OUTER HULL GENERAL ARRANGEMENT Angular bullet fore · soft-chamfer midbody · HILS-C40 aft door · pepakura stock 2×6 m Units: meters · Datum: stem tip z=0, centerline, mid-height · Tolerances: ±25 mm envelope unless noted	Drawing	
	CAL-HULL-GA-001	Sheet 1 of 1 Manufacturer GA
	Rev A	

Generated from canvas geometry (identical math to calypso-hull-manufacturer.canvas.tsx). Do not hand-edit dimensions.

LOA 65 m

Beam 20 m

OAH 12 m

Door 14×8.5

Stem 3.5×4

≈316 sheets @ 2×6

Manufacturer design lock. Outer envelope 65 m × 20 m × 12 m. Fore: angular bullet stations ST0–ST3 over 17 m. Midbody: four flats + 45° chamfer 2.5 m (diag 3.536 m). Aft door clear 14 m × 8.5 m for 5×3 HILS-C40 (12.192×2.438×2.591) with ≥0.5 m side and above. Roll-out apron depth ≥ 12.25 m.

65 m LOA	20 × 12 Beam × OAH	14 × 8.5 Door clear	12.25 m Min apron depth
--------------------	------------------------------	-------------------------------	-----------------------------------

Critical dimensions

Ref	Dimension	Value	Notes
E1	LOA	65 m	Stem tip → aft face
E2	Beam (max)	20 m	Midbody / aft outer
E3	OAH	12 m	Keel → crown, midbody
E4	L_fore	17 m	ST0 → ST3 shoulder
E5	L_mid	44 m	Parallel midbody
E6	L_aft	4 m	Aft coaming band
E7	Chamfer	2.5 m	Each axis · 45° corners
E8	Flat beam / OAH	15 m / 7 m	Between chamfers
E9	Stem face	3.5 m × 4 m	ST0 tip plate
D1	Door clear W×H	14 m × 8.5 m	Factory snap from C40 pack
D2	Sill height	0.25 m	Deck → clear opening
D3	Side clear (each)	0.505 m	≥ 0.5 m required
D4	Above-pack clear	0.727 m	≥ 0.5 m required
D5	Side shell (each)	3 m	Beam margin outside door
D6	Header above door	3.25 m	Lintel → crown
D7	Apron depth	≥ 12.25 m	One C40 deep (12.192 raw)
C1	C40 external	12.192 × 2.438 × 2.591	HILS-C40 / ISO class
C2	Pack W×H×D	12.990 × 7.773 × 12.192	5×3×1 · cell 0.2

Station schedule (fore)

Mark	z (m)	Beam (m)	Height (m)	Half-beam	Half-height
ST0 stem	0	3.5	4	1.75	2
ST1	3.25	10	7.5	5	3.75
ST2	10	17	10.5	8.5	5.25
ST3 shoulder	17	20	12	10	6


Fore bay unfold lengths

Bay	$z_0 \rightarrow z_1$	beam	height	cheek slant	deck slant	P+S courses
1	0 $\rightarrow$ 3.25	3.5 $\rightarrow$ 10	4 $\rightarrow$ 7.5	4.596	3.691	8
2	3.25 $\rightarrow$ 10	10 $\rightarrow$ 17	7.5 $\rightarrow$ 10.5	7.603	6.915	12
3	10 $\rightarrow$ 17	17 $\rightarrow$ 20	10.5 $\rightarrow$ 12	7.159	7.040	12


Plate bill (stock 2×6 m)

Id	Face	Sheets
P-PORT	Port flat 44×7	32
P-STBD	Starboard flat 44×7	32
P-DORSAL	Dorsal flat 44×15	64
P-VENTRAL	Ventral flat 44×15	64
P-CORNER×4	Corner 44×3.54 @45°	64
P-STEM	Stem 3.5×4	2
P-CHEEK	Fore cheeks (3 bays×2)	32
P-FORE-D/V	Fore dorsal/ventral (3×2)	6
P-AFT	Aft 20×12 · door cut 14×8.5	20
TOTAL	All exterior facets (approx)	316


General arrangement views

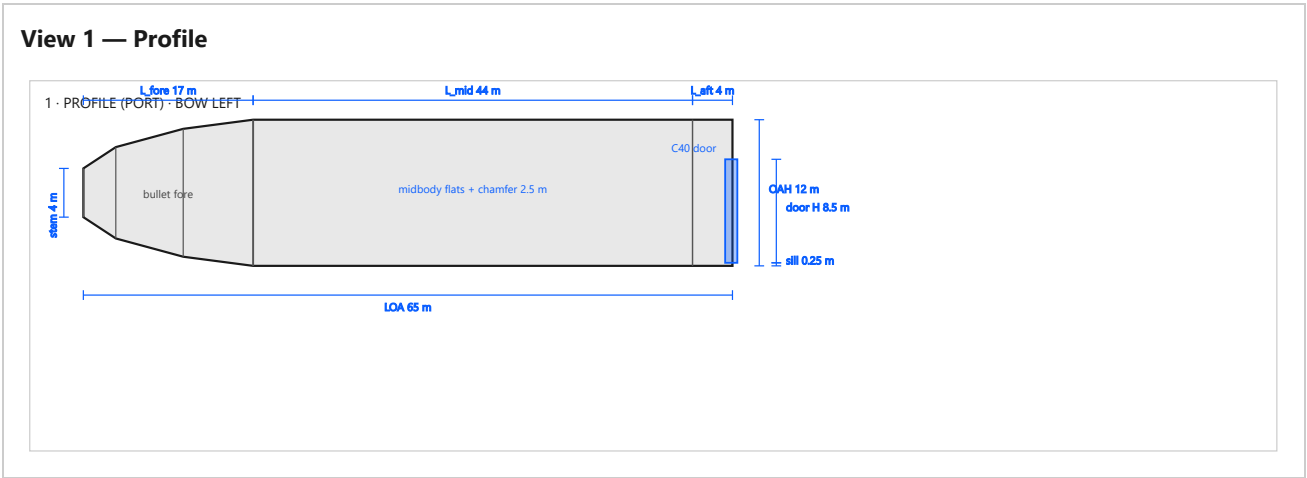


View 2 — Plan

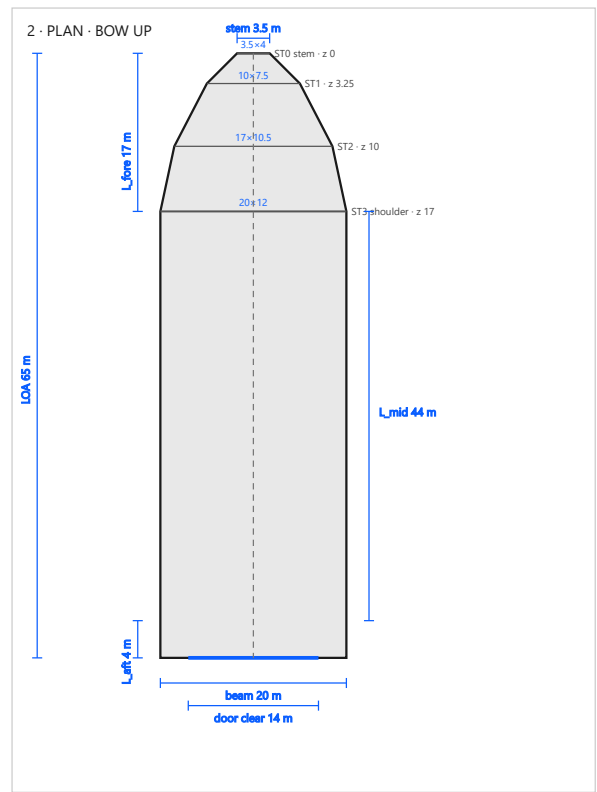

View 3 — Midbody section

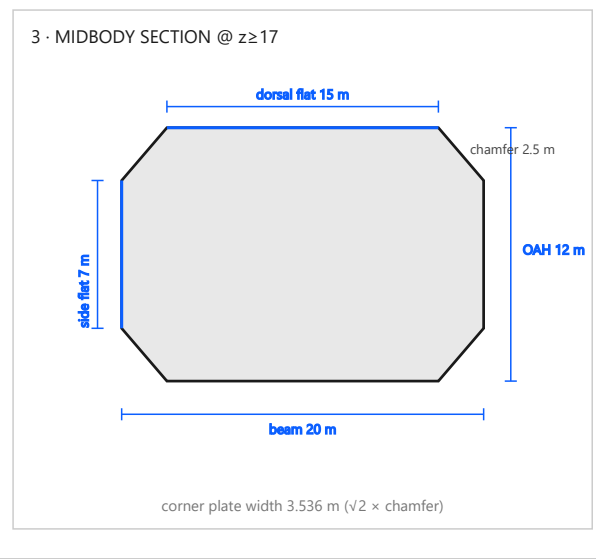


View 4 — Bow-on

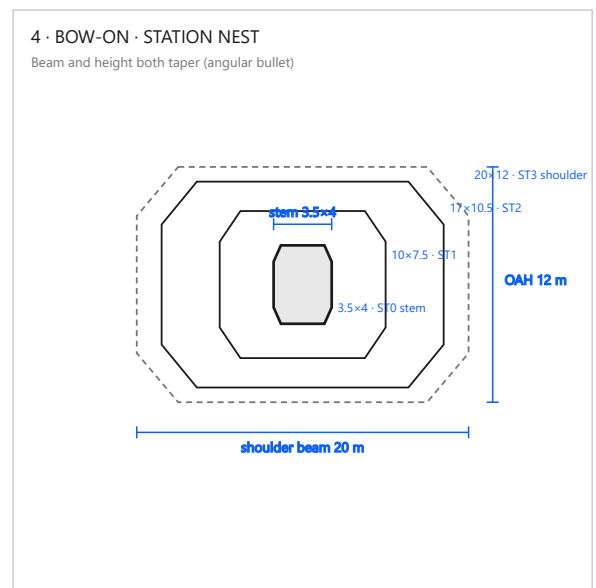

View 5 — Aft door + C40 pack

5 · AFT · C40 DOOR CLEARANCE

5 wide × 3 high roll-out · 0.5 m min side + above · factory clear 14 m×8.5 m

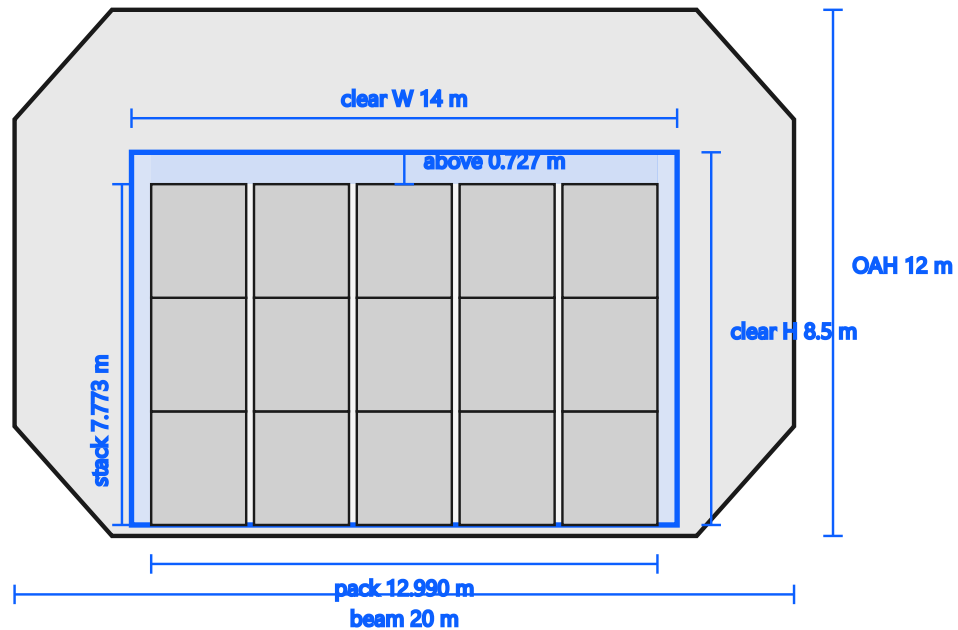

sill 0.25 m · side shell each 3 m · header 3.25 m · apron ≥ 12.25 m

Manufacturer notes

1. All dimensions meters. Snap values are design authority; ISO C40 lengths stay exact (12.192/2.438/2.591).
2. Fore is centerline-symmetric angular bullet — taper beam and height together; do not build a constant-height wedge.
3. Midbody is four large flats + four 45° chamfer strips; corner plate width = 3.536 m.
4. Aft face is flat with soft chamfer matching midbody. Door clear opening centered on CL; sill 0.25 m; clear 14 m×8.5 m must pass 5×3 C40 with ≥ 0.5 m free on sides and above pack.
5. Provide roll-out apron / ramp clear depth ≥ 12.25 m beyond sill (one container deep).
6. Exterior plating from 2×6 m stock, straight cuts. Approx 316 sheets before scrap/overlap — confirm nesting with fabricator.
7. Source of truth: `Cursor canvas calypso-hull-manufacturer.canvas.tsx`. Regenerate via `generate-ga.mjs`.