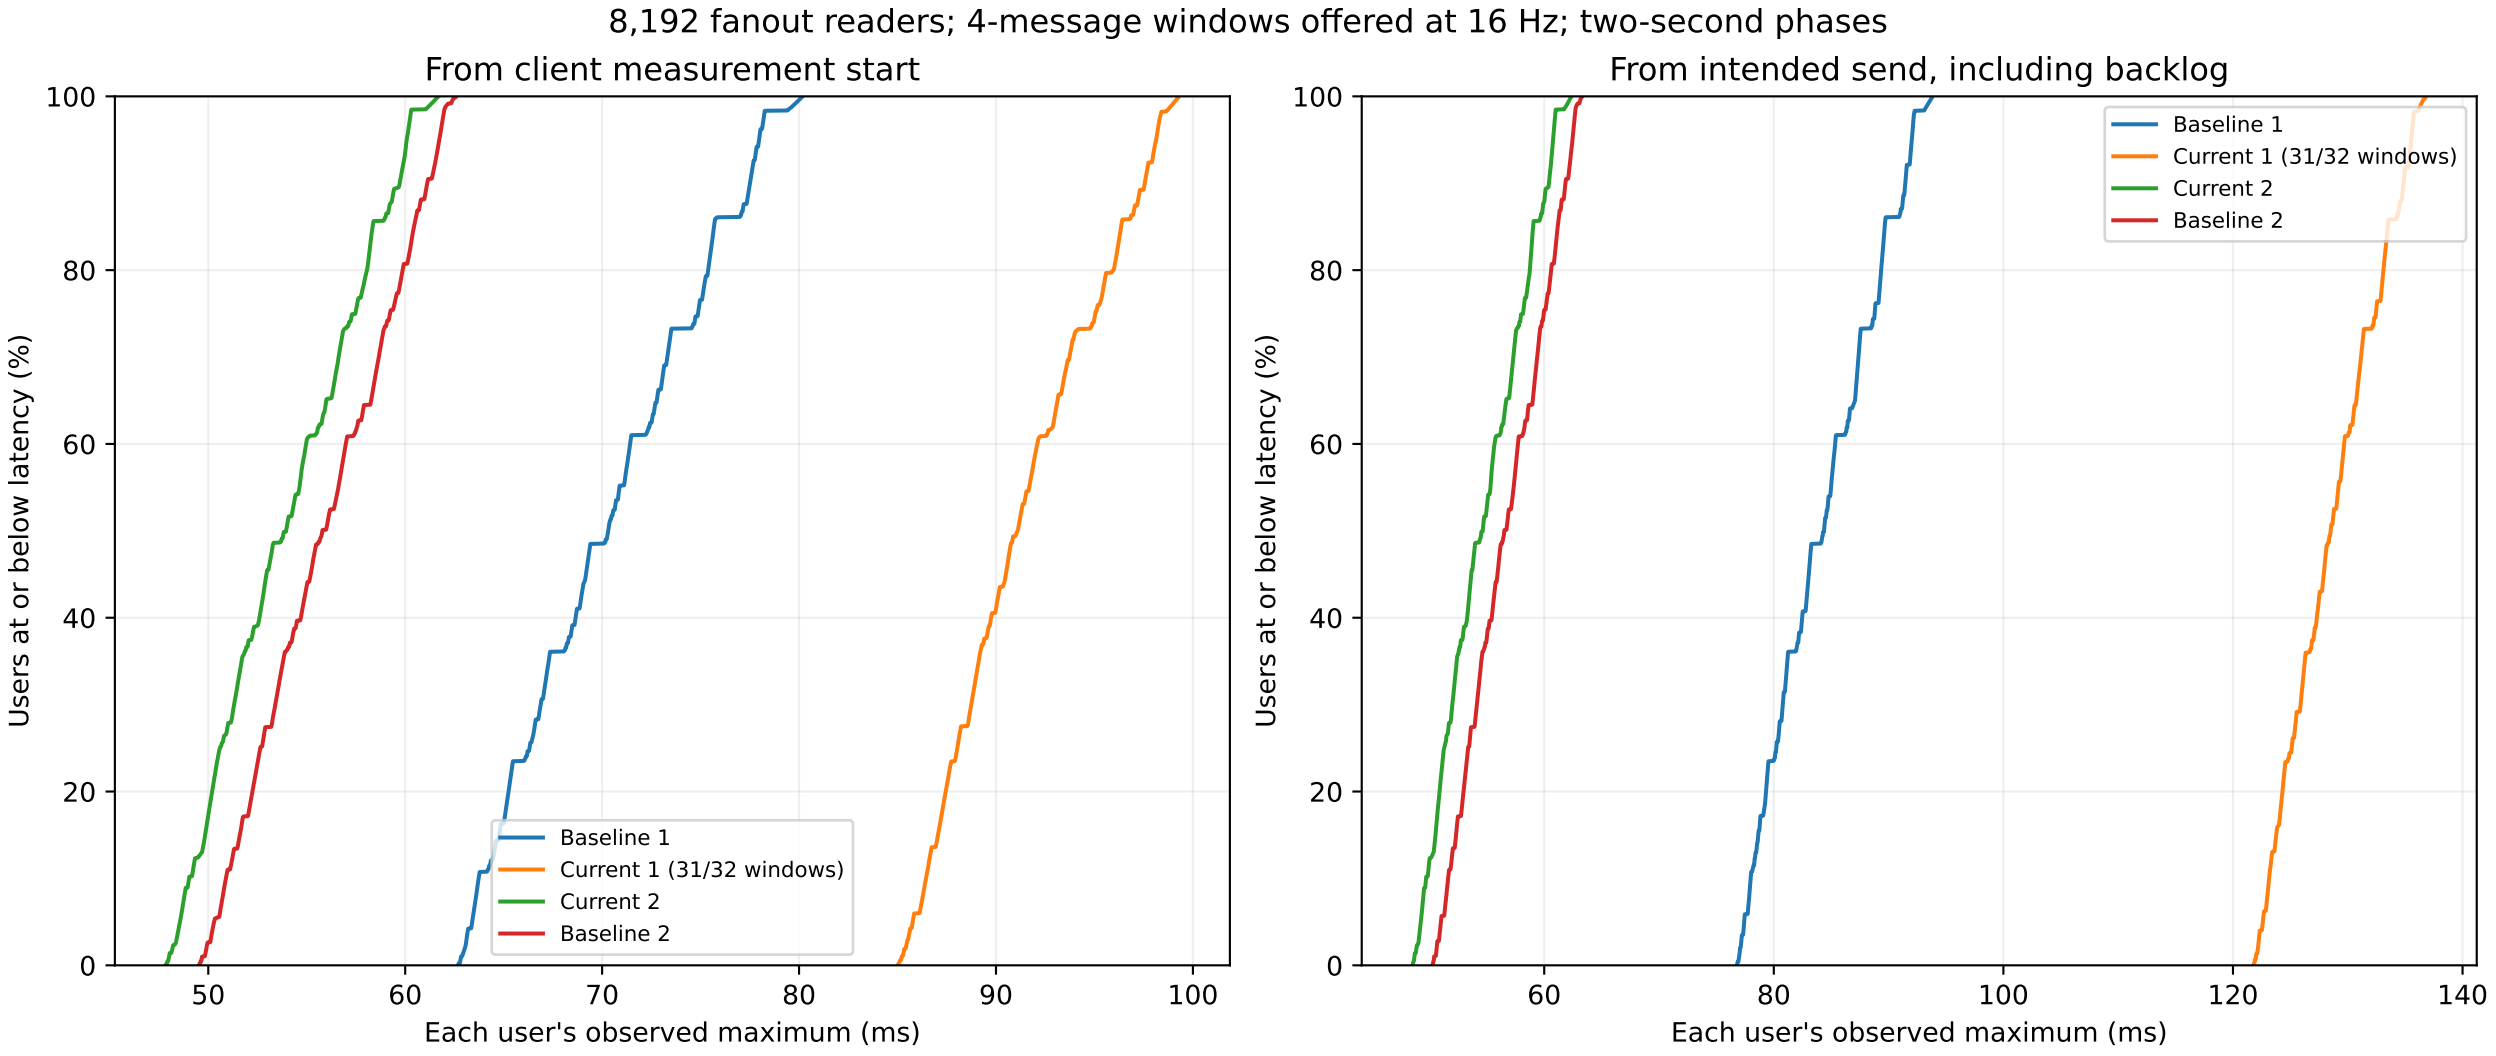
8,192 fanout readers; 4-message windows offered at 16 Hz; two-second phases
From client measurement start
From intended send, including backlog
Users at or below latency (%)
Each user's observed maximum (ms)
Baseline 1
Current 1 (31/32 windows)
Current 2
Baseline 2
0
20
40
60
80
100
50
60
70
80
90
100
120
140