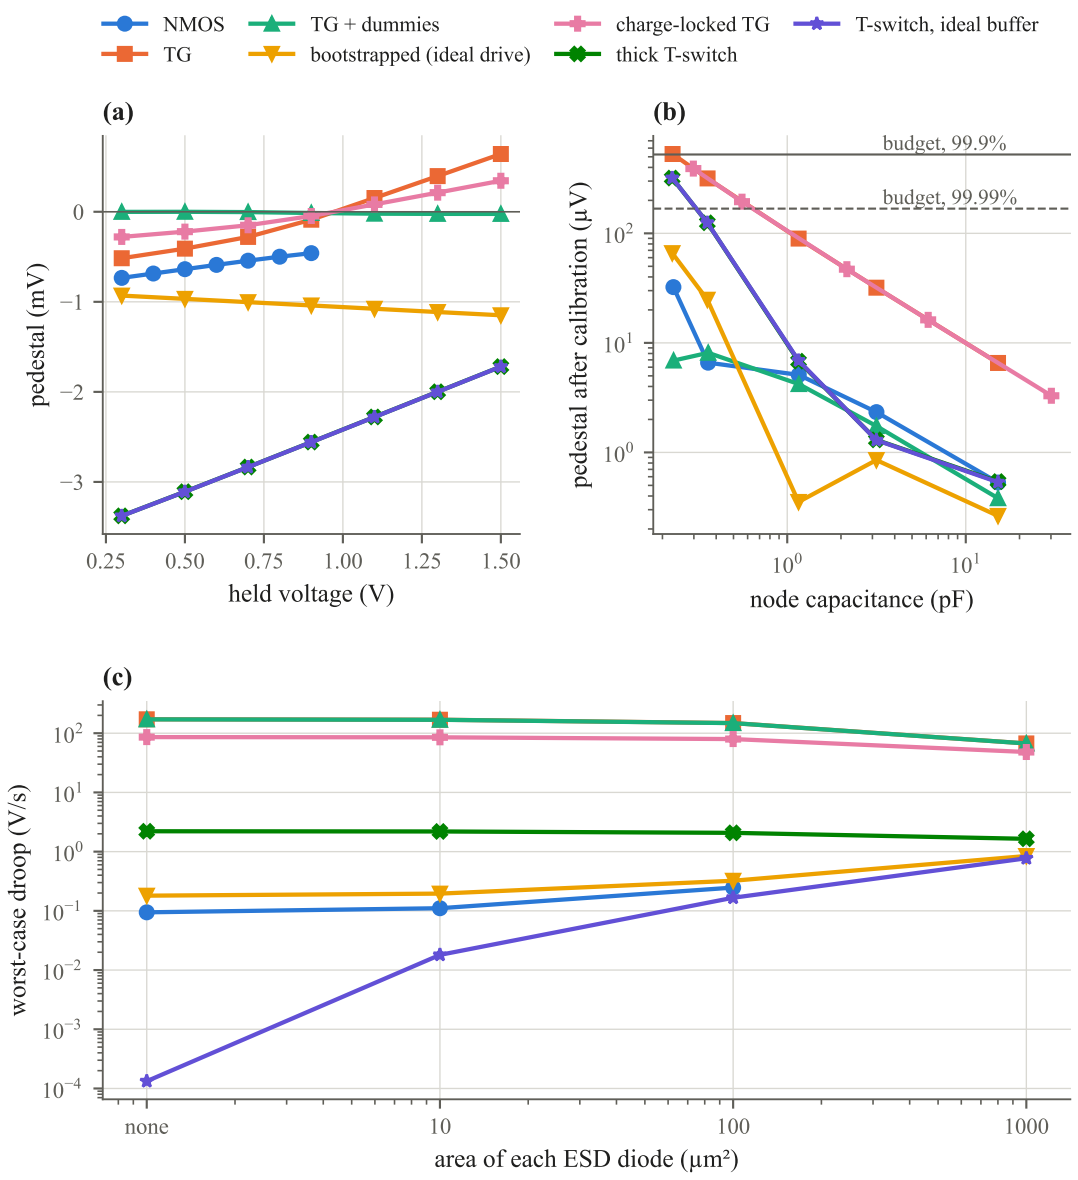
NMOS
TG
TG + dummies
bootstrapped (ideal drive)
charge-locked TG
thick T-switch
T-switch, ideal buffer
(a)
pedestal (mV)
held voltage (V)
(b)
budget, 99.9%
budget, 99.99%
pedestal after calibration (µV)
node capacitance (pF)
(c)
worst-case droop (V/s)
area of each ESD diode (µm²)
none