
CRT ADAPTER



CR-17

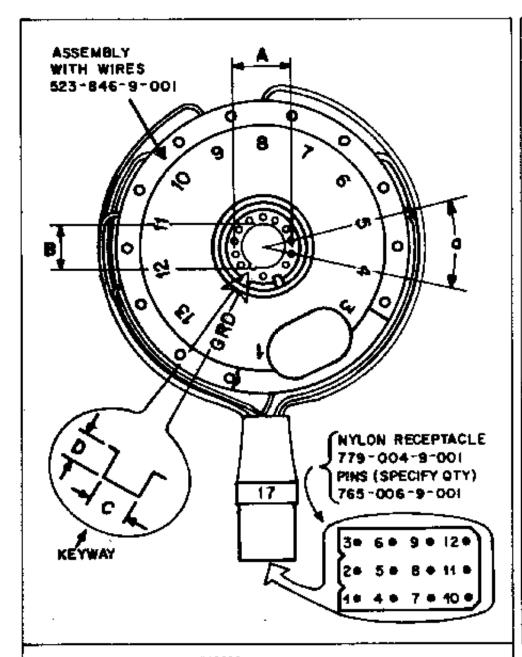

WIRING SCHEME		
CRT SOCKET PIN	WIRE COLOR	NYLON RECEP- TACLE
1	WHT	12
Z		
3	YEL/BLU	N.C.
4	BLU	3
5	WHT/BLU	10
6	BLK	ı
7	BRN	ż
8	YEL/RĒD	В
9	ŘED	N.C.
10	WHT/RED	7
11	WHT/GRN	N.C.
12	YEL/GRN	6
13	GRN	N.C.
14	keyway	

FITS CRT DIMENSIONS:

A = pin circle diameter = 15.24 mm/0.600" nom.

 $a = angular pin spacing = 25-5/7^{\circ}$

B = post diameter = 11.4 mm/0.449" max.

C = keyway width = 2.00 mm/01079" max.

 $D = keyway depth = 1.70 \text{ mm}/0.067^{\circ} \text{ max}.$

PRECISION DYNASCAN DORPORATION

FACTORY SERVICE OPERATIONS
6480 West Cortland Street
Chicago, Illinois 80835
(312)889-8870
Telex # 25-2475

481-167-9-017B