


# CRT ADAPTER

**BK PRECISION®**  
MODEL CR-29

ASSEMBLY WITH WIRES — 527-087-9-001

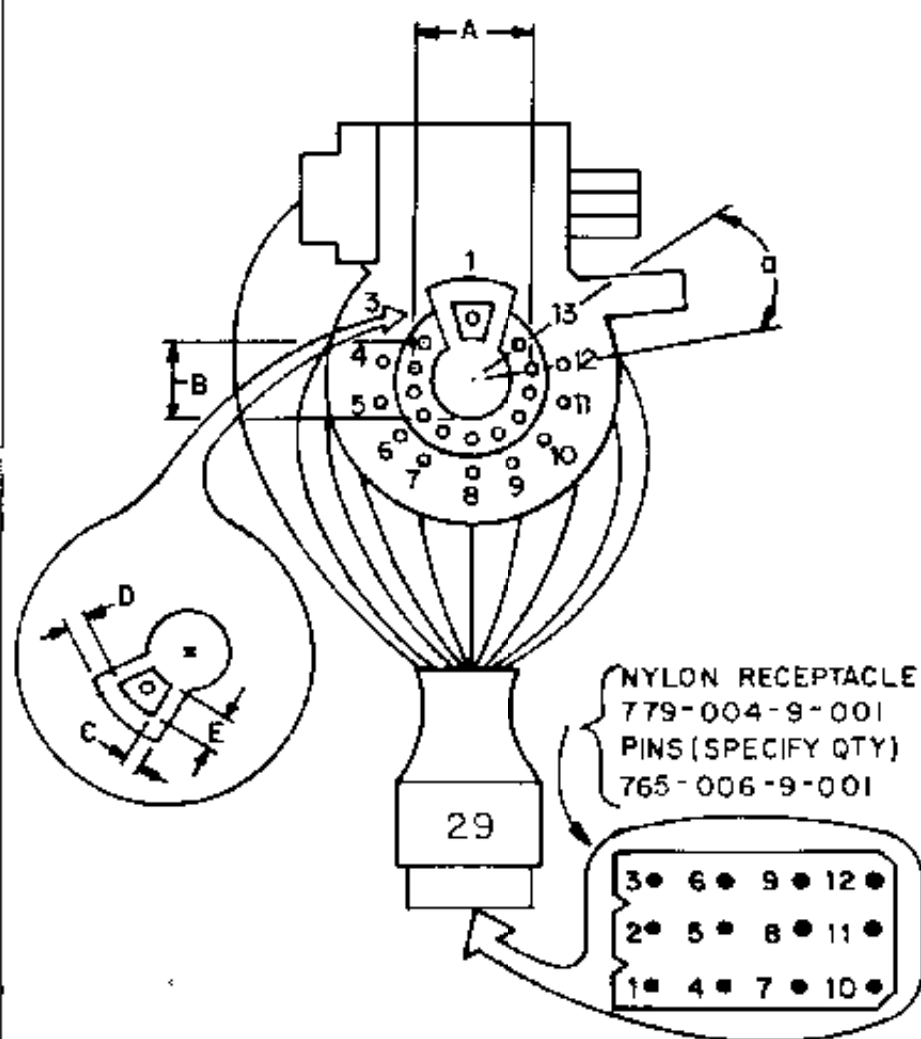

**NOTE:** NO CONTACTS AT PIN  
POSITIONS 3 AND 13.

## WIRING SCHEME

CRT SOCKET PIN	WIRE COLOR	NYLON RECEP- TACLE
1	BLK	12
2	keyway	—
3	—	—
4	YEL/BLU	9
5	YEL/GRN	N.C.
6	GRN	10
7	YEL/RED	1
8	RED	N.C.
9	WHT	2
10	BRN	3
11	BLUE	N.C.
12	WHT/RED	6
13	—	—
14	keyway	—

## FITS CRT DIMENSIONS:

A = pin circle diameter	= 15.24 mm/0.600" nom.
a = angular pin spacing	= 25-5/7°
B = post diameter	= 11.0 mm/0.433" max.
C = keyway width	= 1.52 mm/0.060" nom.
D = keyway width	= 1.27 mm/0.050" nom.
E = keyway depth	= 5.59 mm/0.220" min.

**BK PRECISION®**

B & K Precision, Factory Service Department  
Maxtec International Corporation  
6470 West Cortland Street  
Chicago, Illinois 60635  
Telephone: (312) 880-1448