


CRT ADAPTER



MODEL CR-16

ASSEMBLY WITH WIRES — 527-045-9-001

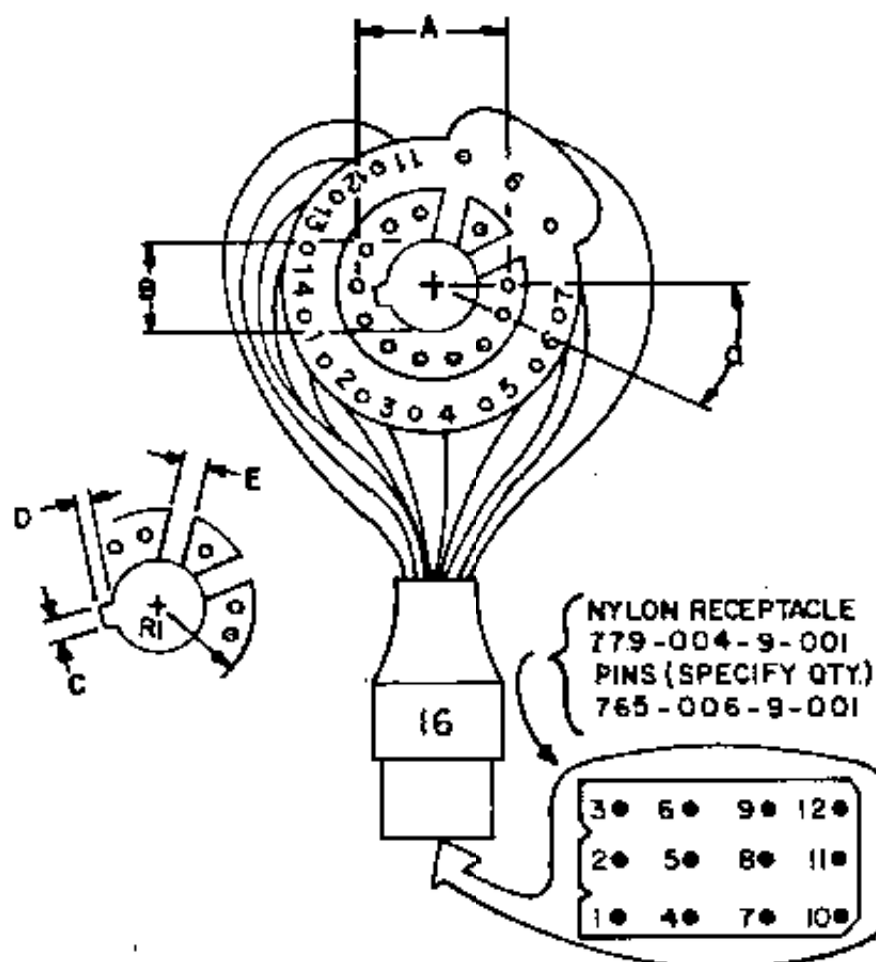

WIRING SCHEME

CRT SOCKET PIN	WIRE COLOR	NYLON RECEPTACLE
1	BLK	1
2	YEL/RED	10
3	RED	4
4	WHT/RED	6
5	WHT/GRN	9
6	YEL/GRN	3
7	GRN	7
8	keyway	—
9	WHT	12
10	keyway	—
11	YEL/BLU	8
12	BLU	11
13	WHT/BLU	5
14	BRN	2

FITS CRT DIMENSIONS:

A = pin circle diameter	= 20.32 mm/0.800" nom.
a = angular pin spacing	= 25-5/7°
B = post diameter	= 11.5 mm/0.455" max.
C = keyway width	= 3.4 mm/0.135" max.
D = keyway depth	= 1.77 mm/0.070" max.
E = keyway width	= 1.83 mm/0.072" max.
R1 = outer keyway radius	= 26.24 mm/1.033" min.



B & K-Precision, Factory Service Operations
Maxtec International Corporation
6470 West Cortland Street
Chicago, Illinois 60635
Telephone #: (312) 889-1448