


CRT ADAPTER

BK PRECISION

CR-28

ASSEMBLY WITH WIRES — 527-087-9-001

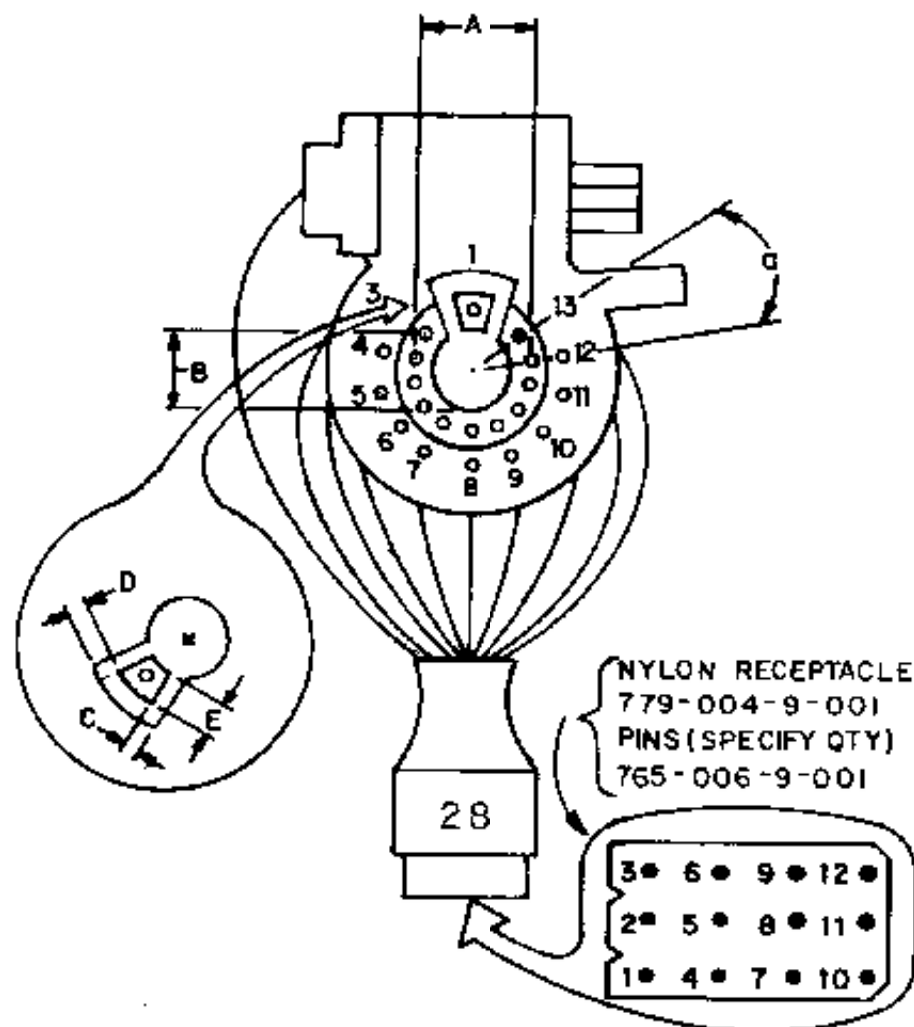

NOTE: NO CONTACTS AT PIN POSITIONS 3 AND 13.

WIRING SCHEME

CRT SOCKET PIN	WIRE COLOR	NYLON RECEPTACLE
1	BLK	12
2	keyway	—
3	—	—
4	YEL/BLU	N.C.
5	YEL/GRN	1
6	GRN	2
7	YEL/RED	4
8	RED	7
9	WHT	10
10	BRN	8
11	BLUE	6
12	WHT/RED	N.C.
13	—	—
14	keyway	—

FITS CRT DIMENSIONS:

A = pin circle diameter	= 15.24 mm/0.600" nom.
a = angular pin spacing	= 25-5/7°
B = post diameter	= 11.0 mm/0.433" max.
C = keyway width	= 1.52 mm/0.060" nom.
D = keyway width	= 1.27 mm/0.050" nom.
E = keyway depth	= 5.59 mm/0.220" min.

BK PRECISION DYNASCAN CORPORATION
FACTORY SERVICE OPERATIONS
4050 N. Ravenswood Ave.
Chicago, Illinois 60613
(312) 327-7270
Telex # 25-3475