


CRT ADAPTER

BK PRECISION
MODEL CR-22

ASSEMBLY WITH WIRES—527-085-9-001

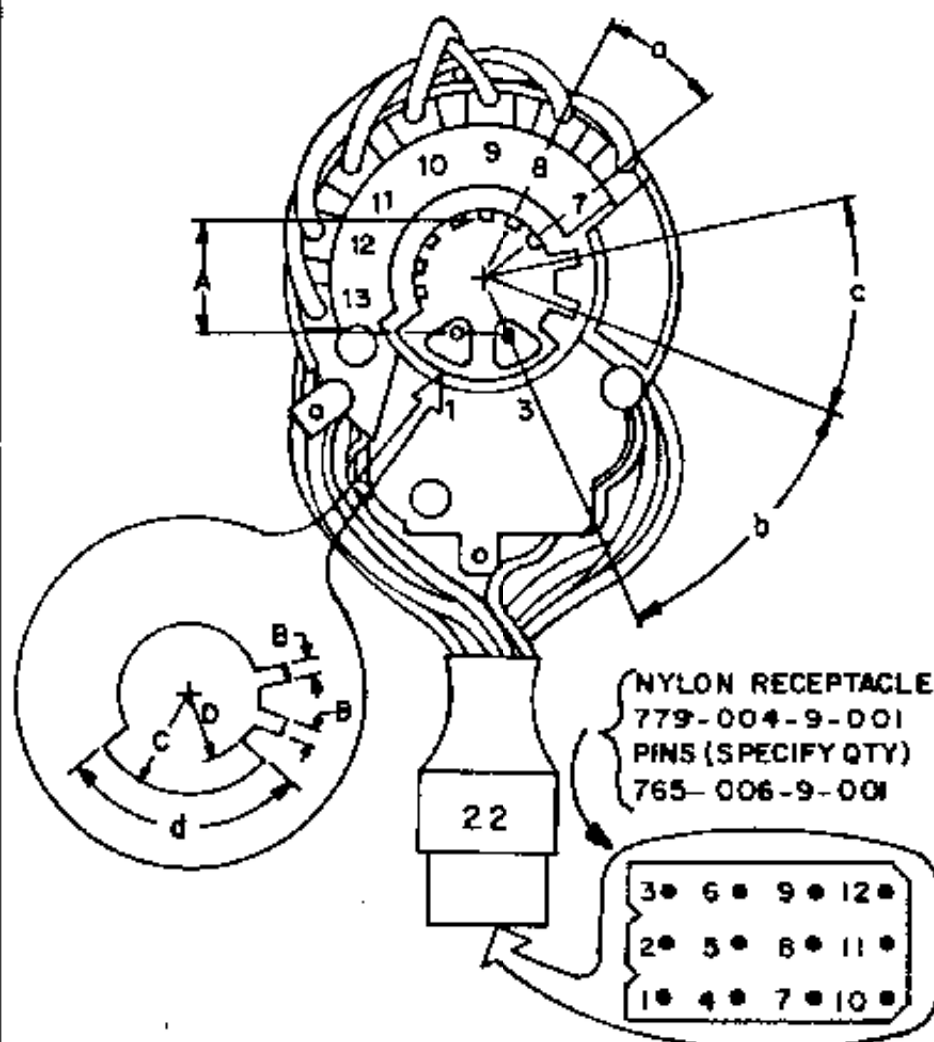

NOTE: PINS 1 AND 3 ARE CONNECTED
TOGETHER INTERNALLY TO
A COMMON WHITE LEAD.

WIRING SCHEME

CRT SOCKET PIN	WIRE COLOR	NYLON RECEP- TACLE
1, 3	WHT	12
2	---	---
3	---	---
4	---	---
5	---	---
6	---	---
7	BLK	1
8	BRN	2
9	RED	3
10	YEL/GRN	7
11	WHT/RED	10
12	YEL/RED	6
13	YEL/BLU	8

FITS CRT DIMENSIONS:

A = pin circle diameter	= 15.24 mm/0.600" nom.
a = angular pin spacing	= 25° 43'
b = angular keyway spacing	= 45°
c = angular keyway spacing	= 33°
d = angular keyway opening	= 102° 52' nom.
B = keyway width	= 2.39 mm/0.094" nom.
C = outer keyway radius	= 12.7 mm/0.500" nom.
D = inner keyway radius	= 10.62 mm/0.400" nom.

BK PRECISION
Maxtec International Corporation
6476 West Cortland Street
Chicago, Illinois 60635
Telephone: (312) 889-1448