
## CRT ADAPTER



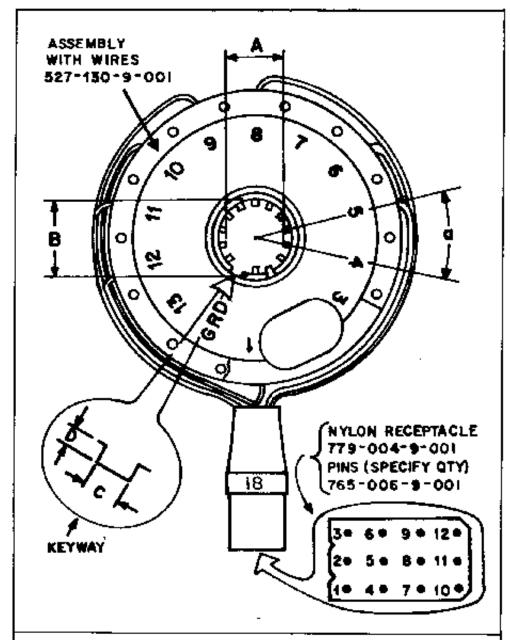

	WIRING SCHEME		
	CRT SOCKET PIN	WIRE COLOR	NYLON RECEP- TACLE
	1	WHT	12
	2	<b>—</b>	<b>—</b>
ŀ	3	YEL/BLU	8
	4	BLU	N.C.
	5	WHT/BLU	N.C.
۱	6	BLK	1
l	7	BRN	2
l	8	YEL/RED	6
	9	RED	3
	10	WHT/RED	10
	11	WHT/GRN	N.C.
	12	YEL/GRN	7
]	13	GRN	N.C.
	14	keyway	!
I			

## FITS CRT DIMENSIONS:

 $\Lambda = pin circle diameter = 15.24 mm/0.600^n nom.$ 

a – angular pin spacing –  $25+5/7^{\circ}$ 

B = post diameter = 19.05 mm/0.750 nom.

C = keyway width = 2.54 mm/0.100<sup>h</sup> nom.

D = keyway depth = 1.27 mm/0.050" nom.

## **\*\* BK PRECISION**

B & K-Precision, Factory Service Department
Maxtec International Corporation
6470 West Cortland Street
Chicago, Illinois 60635
Telephone #: (312) 889-1448