
CRT **ADAPTER**



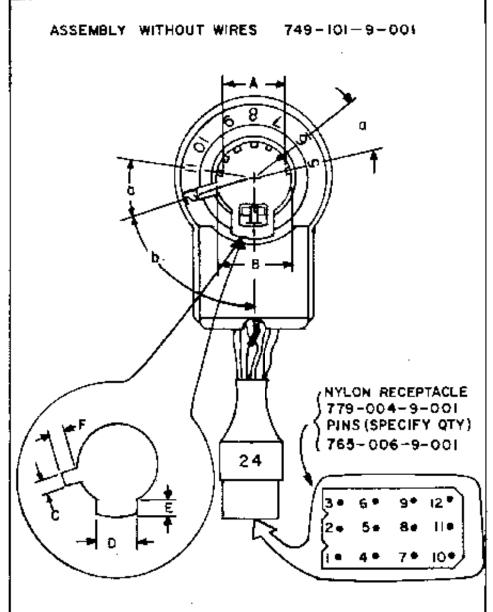

WIRING SCHEME		
CRT SOCKET PIN	WIRE COLOR	NYLON RECEP- TACLE
1	WHT	12
2		
3	 .	
1 .		_ ;
5	YEL	4
6	GRN	7
7	ORG	01
8	RED	6
9	BI.K	ì
10	BRN	2
. 11	BLU	8
12	keyway	

TIPS CRT DIMENSIONS:

 Λ = pin circle diameter.

a = angular pin spacing

b = angular pin spacing

B = post diameter

C = keyway width

D = keyway width

E = keyway depth

F - keyway depth

= 15.24 mm/0.600" (cm.

 $= 25-5/7^{\circ}$

= 77,14⁰

 $= 19.3 \text{ mm}/0.760^{\circ} \text{ max.}$

 $= 3.30 \text{ mm}/0.130^{\circ} \text{ max}.$

= 10.8 mm/0.425" max.

= 5.20 mm/0.205" max.

1 5.20 mm/0.205" max.



B & K-Precision, Factory Service Department Moxeec International Corporation 6470 West Costland Street Chicago, Clients 60635

Telephone: (312) 889-1448