
CRT ADAPTER



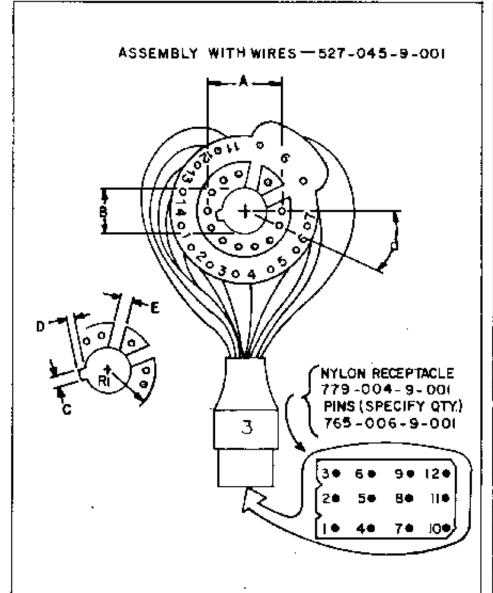

WIRING SCHEME		
CRT SOCKET PIN	WIRE COLOR	NYLON RECEP- TACLE
1	ВГК	í
2	YEL/RED	6
3	RED	3
4	WHT/RED	9
5	WHT/GRN	10
6	YEL/GRN	7
7	GRN	4
8	keyway	_
9	WHT	12
10	keyway	-
H	YEL/BLU	8
12	BLU	5
13	WHT/BLU	11
14	BRN	2
	;	

FITS CRT DIMENSIONS:

A = pin circle diameter

a = angular pin spacing

B = post diameter

C = keyway width

D = keyway depth

E = keyway width

R1= outer keyway radius

 $= 20.32 \text{ mm}/0.800^{\circ} \text{ nom.}$

 $= 25-5/7^{\circ}$

 $= 11.5 \text{ mm/}0.455^{\circ} \text{ max.}$

= 3.4 mm/0.135" max.

= 1.77 mm/0.070" max.

 $= 1.83 \text{ mm/0.072}^{\circ} \text{ max.}$

= 26.24 mm/l.033" min.



Maxtec International Corporation 6470 West Contland Street Chicago, Illinois 60605 Telephone: (312) 889-1448