
CRT ADAPTER



CR-27

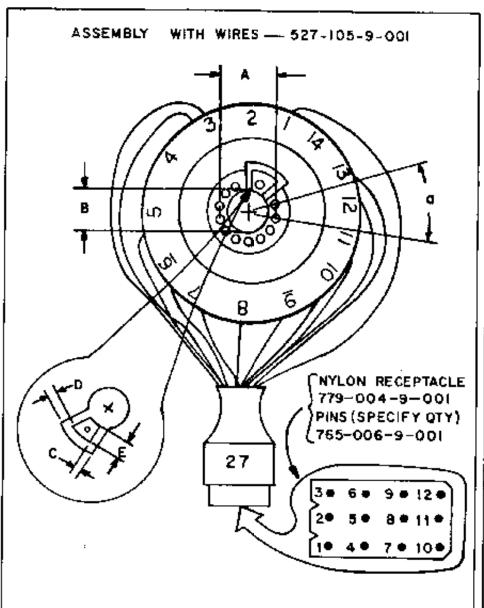

WIRING SCHEME		
CRT SOCKET PIN	WIRE COLOR	NYLON RECEP- TACLE
1	ВЬК	12
2	keyway	
3	WHT/BLU	8
4	YEL/BLU	5
5	YEL/GRN	11
6	GRN	1
7	YEL/RED	2
8	RED	6
9	WHT	3
10	BRN	9
11	вгс	10
12	WHT/RED	7
13	WHT/GRN	4
14	keyway	_

FITS CRT DIMENSIONS:

A = pin circle diameter

a = angular pin spacing

B = post diameter

C = keyway width

D = keyway width

E = keyway depth

= 15.24 mm/0.600" nom.

= 25-5/7°

= 11.0 mm/0.433" max.

= 1.52 mm/0.060" nom.

= 1.27 mm/0.050" nom,

 $= 5.59 \text{ mm/}0.220^{\circ} \text{ min.}$

PRECISION DYNASCAN CORPORATION

FACTORY SERVICE OPERATIONS 8460 West Cortland Street Chicago, Minois 60635 (312)889-8879 Telex # 25-3475