
## **CRT ADAPTER**



CR-2

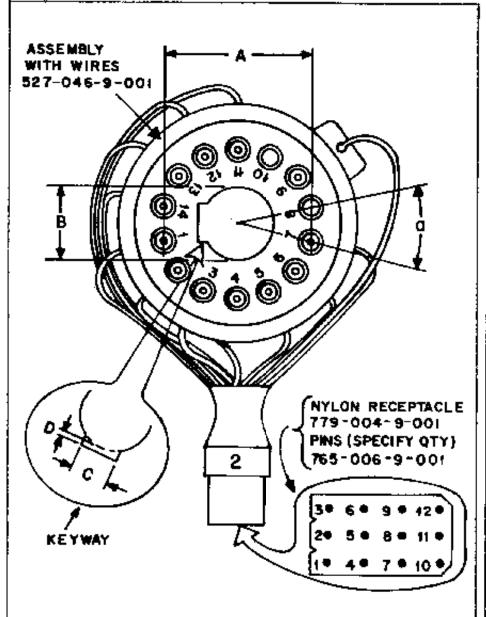

| WIRING SCHEME        |               |                          |
|----------------------|---------------|--------------------------|
| CRT<br>SOCKET<br>PIN | Wire<br>COLOR | NYLON<br>RECEP-<br>TACLE |
| 1                    | вск           | 1                        |
| 2                    | RED           | 3                        |
| 3                    | WHT/RED       | 9                        |
| 4                    | YEL/RED       | 6                        |
| 5                    | YEL/GRN       | 7                        |
| 6                    | GRN           | 4                        |
| 7                    | WHT/GRN       | 10                       |
| 8                    | N.C.          | и.с.                     |
| . 9                  | WHT           | 12                       |
| 10                   | N.C.          | N.C.                     |
| 11                   | WIIT/BLU      | - 11                     |
| 12                   | BLU           | 5                        |
| 13                   | YEL/BLU       | 8                        |
| 14                   | BRN           | 2                        |
| ;                    |               |                          |
|                      |               |                          |

## FITS CRT DIMENSIONS:

A = pin circle diameter

a = angular pin spacing

B = post diameter

C = keyway width D = keyway depth = 39.37 mm/1.550" nom.

 $= 25-5/7^{\circ}$ 

= 19.43 mm/0.765" max.

= 9.90 mm/0.390" max.

= 0.914 mm/0.036 max.

## PRECISION DYNASCAN CORPORATION

FACTORY SERVICE OPERATIONS 6460 West Cortland Street Chicago, Ulinois 60635 (312)889-8870 Telex V 25-3475