
CRT ADAPTER

MODEL CR-20

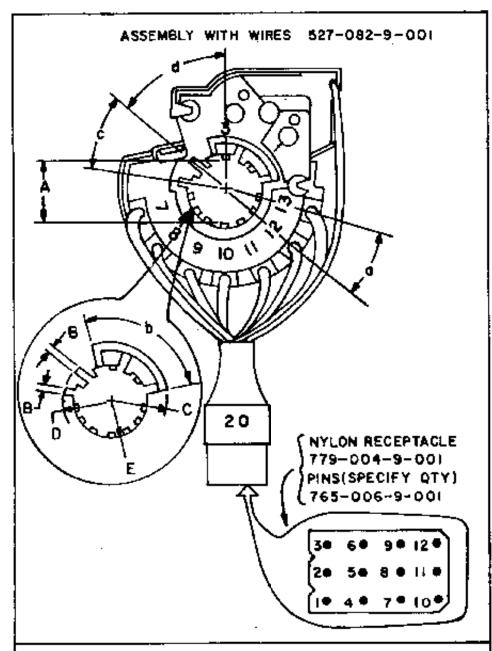

WIRING SCHEME		
CRT SOCKET PIN	WIRE COLOR	NYLON RECEP- TACLE
1, 3	WHT	12
2		
3		
4		_
5	_	_
6		
7	BLK	1
8	BRN	2
9	RED ·	3
10	YEL/GRN	7
11	WHT/RED	10
12	YEL/RED	6
13	YEL/BLU	8
]		
1	1	I

FITS CRT DIMENSIONS:

A = pin circle diameter = $15.24 \text{ mm/}0.600^{\circ}$ nom.

a = angular pin spacing = 25° 43'

B = keyway width = 2.39 mm/0.094" nom.

b = angular keyway opening = 102° 52'

e = angular keyway spacing = 330

d = angular keyway spacing = 45°

C = outer keyway radius = $13.59 \text{ mm/}0.535^{\circ}$ nom. D = outer keyway radius = $12.7 \text{ mm/}0.500^{\circ}$ nom.

E = inner keyway radius = $9.52 \text{ mm/}0.375^{\text{m}} \text{ nom.}$



B& K-Precision, Factory Service Department
Maxtec International Corporation
6470 West Cortland Street
Chicago, Illinois 60635
Telephone: (312) 889-1448