
CRT ADAPTER



CR-26

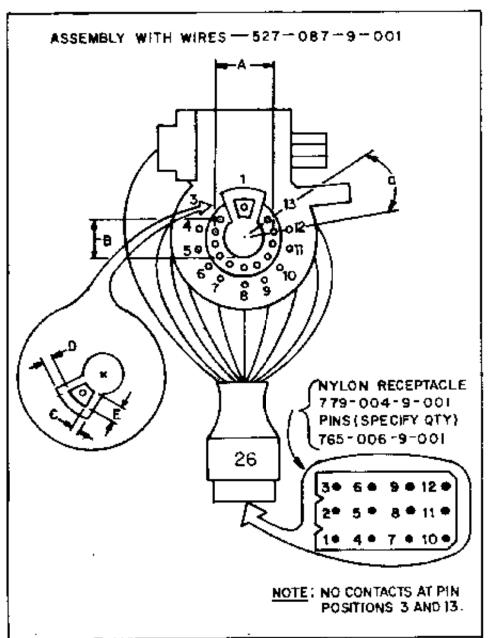

WIRING SCHEME		
CRT SOCKET PIN	WIRE COLOR	NYLON RECEP- TACLE
1	влк	12
2	keyway	
3		
4	YEL/BLU	N.C.
5	YEL/GRN	4
6	GRN	1
7	YEL/RED	2
8	RED	6
9	WHT	N.C.
10	BRN	10
11	BLUE	N.C.
12	WHT/RED	N.C.
13	<u> </u>	
14	keyway	
		•

FITS CRT DIMENSIONS:

A = pin circle diameter

a = angular pin spacing

B = post diameter

C = keyway width

D = keyway width

E = kcyway depth

= 15.24 mm/0.600" nom.

 $= 25-5/7^{\circ}$

 $= 11.0 \text{ mm/0.433}^{\circ} \text{ max.}$

 $= 1.52 \text{ mm/}0.060^{\circ} \text{ nom.}$

= 1.27 mm/0.050" nom.

 $= 5.59 \text{ mm/}0.220^{\circ} \text{ min.}$

DYNASCAN CORPORATION PRECISION

FACTORY SERVICE OPERATIONS 4050 N. Ravenswood Ave. Chicago, Illinois 60612 (312) 327-7270 Telex # 25-3475