
CRT ADAPTER



CR-32



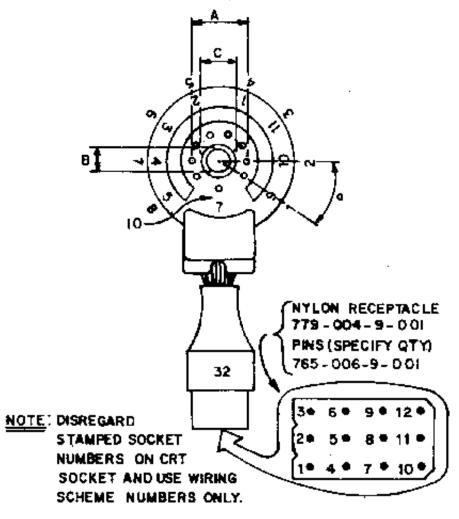

WIRING SCHEME		
CRT SOCKET PIN	WIRE COLOR	NYLON RECEP- TACLE
1	ORG	6
2	RED	3
3	BLK	1
4	BRN	2
5	N.C.	~==
6	GRN	8
7	YEL	7
8	BLU	9
9		
10	WHT	12
11		
	:	

FITS CRT DIMENSIONS:

A = pin circle diameter = $12.0 \text{ mm}/0.472^{\text{m}} \text{ nom.}$

 $a = angular pin spacing = 32.7^{\circ}$

B = post diameter = 5.51 mm/0.217 max.

C = post shoulder diameter = 8.51 mm/0.335" max.

EXPRECISION DYNASCAN CORPORATION

FACTORY SERVICE OPERATIONS 4050 N. Ravenswood Ave. Chicago, Ulinois 60613 (312) 327-7270 Telex # 25-3475