
## CRT ADAPTER



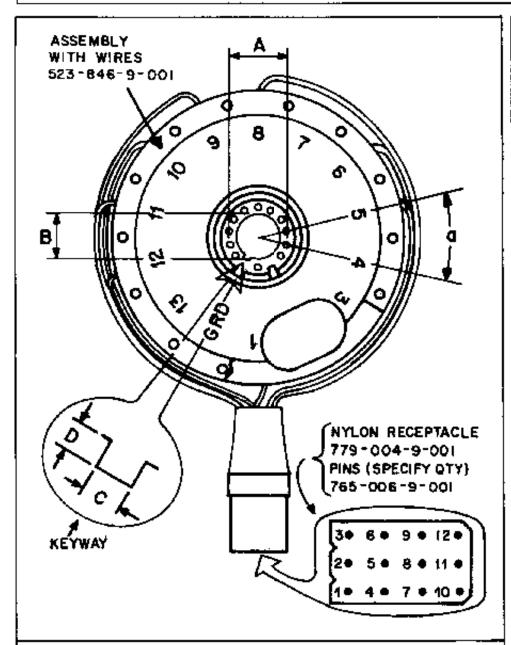

| WIRING SCHEME        |               |                          |
|----------------------|---------------|--------------------------|
| CRT<br>SOCKET<br>PIN | WIRE<br>COLOR | NYLON<br>RECEP-<br>TACLE |
| 1                    | ₩HT           | 12                       |
| 2                    | —             | _                        |
| 3                    | YEL/BLU       | 11                       |
| 4                    | BLU           | 5                        |
| 5                    | WHT/BLU       | 8                        |
| 6                    | BŁK           | 10                       |
| 7                    | BRN           | 1                        |
| 8                    | YEL/RED       | 7                        |
| 9                    | RED           | 2                        |
| 10                   | WHT/RED       | 4                        |
| 11                   | WHT/GRN       | 6                        |
| 12                   | YEL/GRN       | 3                        |
| 13                   | GRN           | 9                        |
| 14                   | keyway        |                          |
|                      |               |                          |

## FITS CRT DIMENSIONS:

A = pin circle diameter = 15.24 mm/0.600" nom-

a = angular pin spacing = 25-5/7°

B = post diameter = 11.4 mm/0.449 max.

C = keyway width = 2.00 mm/0.079" max.

D = keyway depth = 1.70 mm/0.067" max.



B & K-Precision, Factory Service Department Maxiec International Corporation 6470 West Cortland Street Chicago Wineis 60635

Chicago, Illinois 60635 Telephone: (312) 869-1448