
CRT ADAPTER



CR-13



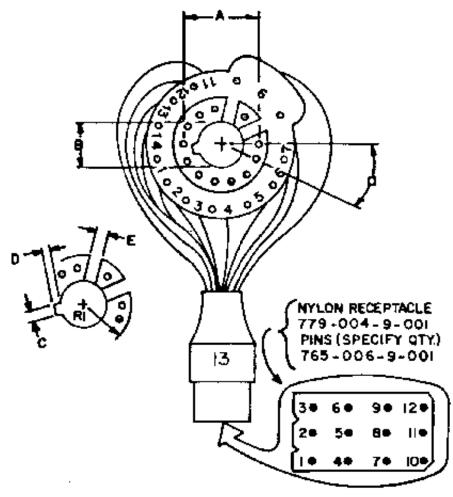

WIRING SCHEME		
CRT SOCKET PIN	WIRE COLOR	NYLON RECEP- TACLE
1	BLK	1
2	YEL/RED	6
3	RED	3
4	WHT/RED	9
5	WHT/GRN	10
6	YEL/GRN	7
7	GRN	4
8	keyway	
9	WIIT	12
10	keyway	<u></u>
11	YEL/BLU	8
12	BLU	12
13	WHT/BLU	11
14	BRN	2
1		

FITS CRT DIMENSIONS:

A = pin circle diameter

a = engular pin spacing

B = post diameter

C = keyway width

D = keyway depth

E = keyway width

R1= outer keyway radius

= 20.32 mm/0.800ⁿ nom.

 $= 25-5/7^{\circ}$

 $= 11.5 \text{ mm/}0.455^{\circ} \text{ max.}$

= 3.4 mm/0.135" max.

 $= 1.77 \text{ mm}/0.070^{\circ} \text{ mex.}$

= 1.83 mm/0.072" max.

= 26.24 mm/1.033" min.

DYNASCAN CORPORATION

FACTORY SERVICE OPERATIONS 6460 West Cortland Street Chicago, Illinois 68635 (312)889-6870 Telex # 25-3475