
CRT ADAPTER



CR-4

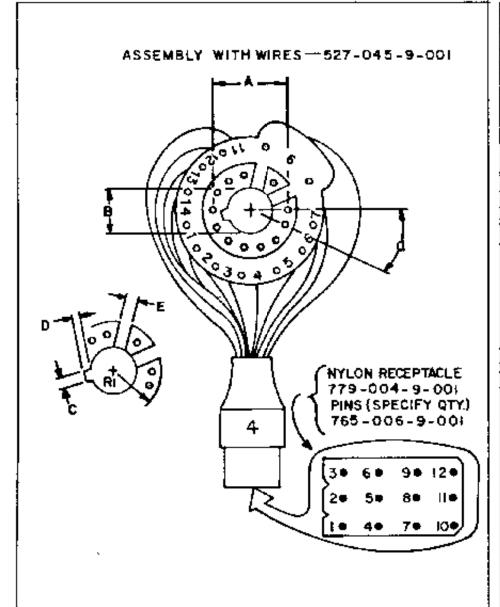

WIRING SCHEME		
CRT SOCKET PIN	WIRE COLOR	NYLON RECEP- TACLE
1	BLK	1
2	YEL/RED	Я
3	RED	3
4	WHT/RED	8
5	WHT/GRN	11 .
6	YEL/GRN	5
7	GRN	6
8	keyway	
9	WHT	12
10	keyway	_
11	YEL/BLU	7
12	BLU	10
13	WHT/BLU	4
14	BRN	2

FITS CRT DIMENSIONS:

A = pin circle diameter

a = angular pin spacing

B = post diameter

b - post diamete

C = keyway width

D ≈ keyway depth

E = keyway width

R1 = outer keyway radius

= 20.32 mm/0.800" nom.

 $= 25-5/7^{\circ}$

 $= 11.5 \text{ mm/}0.455^{\circ} \text{ max.}$

= 3.4 mm/0.135" max.

 $= 1.77 \text{ mm}/0.070^{\circ} \text{ max}.$

 $= 1.83 \text{ mm/} 9.072^{\circ} \text{ max.}$

= 26.24 mm/1.033" min-

EXPRESSION DYNASCAN CORPORATION

FACTORY SERVICE OPERATIONS 6460 West Cortland Street Chicago, Illinois 60635 (312)889-8870 Telex # 25-3475