
## CRT ADAPTER



CR-33

SOCKET WITHOUT WIRES - 749-108-9-001

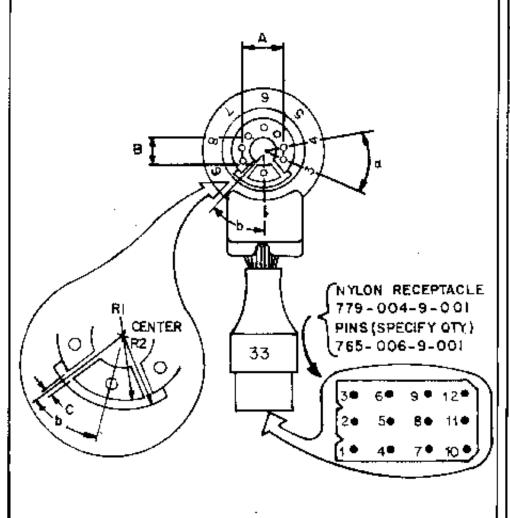

WIRING SCHEME		
CRT SOCKET PIN	WIRE COLOR	NYLON RECEP- TACLE
1	WHT	12
z	keyway	_
3	GRN	8
4	BLK	ı
5	BRN	z
6	RED	3
7	ORG	6
8	BLU	9
9	YEL	7
10	keyway	

## FITS CRT DIMENSIONS:

A = pin circle diameter = 10.36 mm/0.408" nom.

a = angular pin spacing =  $36^{\circ}$ b = angular keyway spacing =  $38^{\circ}$ 

B = post diameter

= 6.5 mm/0.256 max.

C = keyway width

= 1.0 tnm/0:040" max.

R1= inner radius keyway

= 8.66 mm/0.341" nom.

R2= outer radius keyway

= 9.76 mm/0.384" nom.

## PRECISION DYNASCAN CORPORATION

FACTORY SERVICE OPERATIONS
4050 N. Favenawood Ave.
Chicago, Elinois 60623
(312) 327-7270
Telex # 25-3475