


- Turn on to "ON AIR" in less than 2 minutes
- Standby to "ON AIR" in less than 15 seconds
- No adjustment needed to get "ON AIR"
- Just turn on, press start and go
- File transfer capability
- Variable Bit Rate (VBR)
- 6 Embedded 3G/4G modems
- User friendly interface (GUI)
- Store and Forward capability
- Intercom
- Forward Error Correction (FEC)
- FTP Upload capability
- Capability to stream different servers
- Light weight: Only 1.4 Kg.

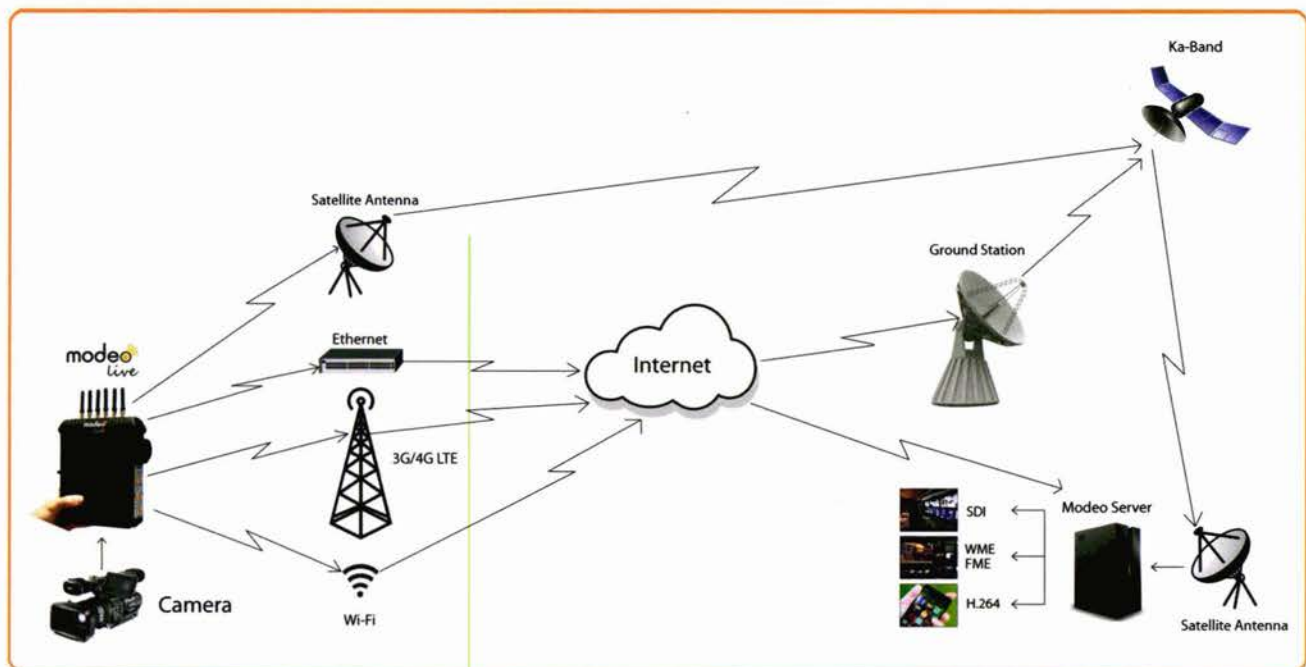

Mobile Data Communication Technologies Co., Ltd.

Address : Esenkent Baraj Yolu Road., Emirgan Str.,
No:3, Umraniye, Istanbul, TURKEY

Tel: +90 216 329 56 00 E-mail: info@modeo.tv
Fax: +90 216 329 02 99 Mobile: +90 507 650 39 60

Proline TURKEY

www.pro-line.com.tr
 +90 (216) 528 62 00
 info@pro-line.com.tr

Itqan QATAR

www.itqan.com.qa
 +974 4450 2555
 info@itqan.com.qa



Specifications

ML11 | SD

VIDEO

- SDI (BNC), Analog (Composite) (BNC)
- SD/SDI, PAL/NTSC
- H.264 AVC
- QCIF (176x144), CIF (352x288), SD (720x576i 50 Hz)
- SDI, Composite, TS-H.264 Recording
- 256 Kbps – 6 Mbps
- 4sec. – 6 sec.

AUDIO

- XLR L/R - Balanced
- HE-AAC
- 48 Kbit
- Mic and earphone jack

SIM CARDS

- 6 easy to reach SIM card slots
- New SIM card Plug & Run

MODEMS

- 6 embedded 3G/4G modems

RECORDING

- Up to 32GB Micro SD card (Client)
- Each video stream is automatically recorded in H.264 format (Server)

REMOTE ACCESS THROUGH

- Internet
- User Interface SW, smart phones, tablet and notebook

USER INTERFACES

- 4.3" Touch Panel (Client)
- Control Panel (Client)
- Graphic User Interface (Server/Client)

ML22 | HD

VIDEO

- HD (BNC), SDI (BNC), Analog (Composite) (BNC), HDMI
- HD/HDI, SD/SDI, PAL/NTSC
- H.264 AVC
- 1080p 50, 1080i 50, 720i 50, 720p 50
- QCIF (176x144), CIF (352x288), SD (720x576i 50 Hz), HD (1920x1080i 50 Hz)
- SDI, HDMI, Composite, TS-H.264 Recording
- 256 Kbps – 6 Mbps
- 4sec. – 6 sec.

OPERATING SYSTEM

- Linux OS (Server/Client)

OTHER INTERFACES

- 1 X RJ45 10/100/1000 Mbps (Server/Client)
- 1 X Usb 2.0 (Server/Client)
- 32GB Micro SD support (Client)

TRANSFER & DELIVERY

- 3G / 4G LTE
- Wi-Fi
- Ethernet

POWER

- 100 V – 240 V AC
- 12 V DC
- Car charger

OTHER FEATURES

- VBR (Variable bit rate)
- FEC (Forward error correction)
- Store & Forward
- File transfer capability (Both Server to Client & Client to Server)
- 18 cm x 24 cm x 8 cm
- -5°C – +45°C Operating Temperature
- -40°C – +80°C Storage Temperature

PORTABILITY

- Only 1.4 Kg.
- Can easily be carried in a specially designed bag