

Co-Packaged Optics

Architecture, adoption and value capture in AI-scale networks

Nur Alpys

2026-08-18

Table of contents

1	Co-Packaged Optics	5
1.1	Executive conclusion	5
1.2	Named investment views	7
1.3	The investable question	7
1.4	What would make the view materially stronger	8
1.5	How to use this report	8
1.6	Evidence cut-off and scope	9
1.7	Read the report	9
2	Decision framework	10
2.1	Research question	10
2.2	Claim convention	10
2.3	Evidence standard	10
2.4	Decision gates	11
2.5	The unit of analysis	11
3	What CPO solves	13
3.1	The physical problem	13
3.2	The trade-off is not simply power	13
3.3	Where the electrical boundary matters	14
3.4	Power is necessary, but not sufficient	14
4	Architecture contest	16
4.1	Five architectures, five different constraints	16
4.1.1	How to read the matrix	16
4.2	Decision matrix	17
4.3	Architecture is a portfolio of trade-offs	17
4.4	The 200G and 400G distinction	18
4.5	Comparison protocol for technical claims	18
4.6	NPO deserves separate diligence	19
5	Scale-out optical engines and PIC design	20
5.1	The engine is a coupled system	20
5.2	Where durable economics could be captured	20
5.3	Scale-out remains the near-term focus	20
5.4	The design problem is an optimisation, not a parts list	21
5.5	Scale-out PIC thesis	22
6	Manufacturing, reliability and serviceability	23
6.1	The adoption bottleneck may be manufacturing	23
6.2	Cost per qualified, shippable engine	23

6.3	Serviceability is an architecture variable	24
6.4	Yield compounds across interfaces	24
6.5	Test and service define the real failure domain	24
6.6	What would clear the gate	25
6.7	Reliability is a system property	25
6.8	The cost of a late failure	26
7	Adoption timing and scenarios	27
7.1	Separate commercial proof from meaningful adoption	27
7.2	Falsification checklist	28
7.3	A gated adoption timeline	28
7.4	Scenario conditions	29
7.5	What counts as a timing miss	29
8	Industry structure and value pool	31
8.1	CPO redistributes content; it does not automatically create value	31
8.2	Profit-pool test	31
8.3	Content migration is not profit creation	32
8.3.1	Supplier-role status	32
8.4	The profit-pool scorecard	33
9	Company investment cases	34
9.1	How to read these cases	34
9.2	Expectations versus variant view	34
9.3	NVIDIA	36
9.3.1	Product boundary and public evidence	36
9.3.2	Variant view	36
9.3.3	Earnings relevance and falsification	36
9.4	Broadcom	37
9.4.1	Product boundary and public evidence	37
9.4.2	Variant view	37
9.4.3	Earnings relevance and falsification	37
9.5	Coherent and Lumentum	38
9.5.1	Coherent: broad optical-engine option value	38
9.5.2	Lumentum: external-laser conversion case	38
9.6	Marvell and TSMC	39
9.6.1	Marvell: a separate scale-up optionality case	39
9.6.2	TSMC: process control, not an optical-engine peer	39
9.7	What the consensus-versus-variant framework can and cannot do	40
9.7.1	How a future model will be constructed	40
9.7.2	Catalysts by company	40
10	Risks, disconfirming evidence and watchlist	42
10.1	Thesis risks	42
10.2	Quarterly watchlist	42
10.3	Re-rating rule	42
10.4	Evidence that would change the ranking	43
10.5	Quarterly evidence dashboard	43

Appendices	44
A Methodology and public-data boundary	44
A.1 Method	44
A.2 What is public	44
A.3 What remains private	44
A.4 Release checklist	44
A.5 Research protocol	45
A.5.1 Source classification	45
A.5.2 Reconciliation rules	45
A.5.3 Scenario methodology	46
A.5.4 Independence and conflicts	46
B Glossary	47
C Sources and figure register	49
C.1 Source policy	49
C.2 Visual and figure register	49
C.3 Reproducibility note	50
C.4 Link integrity and archival policy	50
C.5 Bibliography	50
D Decision evidence register	55
D.1 Purpose and reading rule	55
D.2 Architecture and electrical boundary	55
D.3 System power and alternative architectures	56
D.4 Optical engines, PICs and external light	57
D.5 Manufacturing, qualification and serviceability	58
D.6 Customer, product and commercial-proof signals	58
D.7 Adoption scenarios and counterevidence	59
D.8 Value-pool and company exposure	60
D.9 Investment conclusion and falsification	60
D.10 Publication controls	61
E Research record	62
E.1 Scope and evidence cut-off	62
E.2 Editorial boundary	62

1 Co-Packaged Optics

Architecture, adoption and value capture in AI-scale networks

18 August 2026 · Public research report

[Start with the plain-language CPO digest](#)

Coverage: 2026–2032 · Focus: Ethernet scale-out optical engines and PICs · Last evidence review: 18 August 2026

 Research disclosure

This report is for informational and educational purposes only. It is not investment advice, a solicitation, or a recommendation to buy or sell any security. Conclusions are evidence-gated and may change as customer, yield, qualification and supplier-economics data become public.

1.1 Executive conclusion

The central view: switch-side CPO at 200G/lane remains the clearest disclosed commercial route for Ethernet scale-out, but product-route evidence is stronger than exact-SKU customer and scale proof. NVIDIA has defined SN6810/SN6800 Spectrum-X Ethernet Photonics CPO configurations; Broadcom has defined the 102.4T, 200G/lane BCM78919 / TH6-Davisson route. These are meaningful product signals, not independently reconciled accepted-unit, repeat-shipment, yield or margin disclosures ([NVIDIA 2026b](#); [Broadcom 2025a](#), [2025b](#), [2026b](#)).

Decision	Current view	Evidence grade	What would change it
First commercial domain	Ethernet scale-out switching	Inference	A named, repeat accelerator-side optical-I/O deployment with accepted volumes
Commercial proof	2026–2027 is the key verification window	Forecast	Customer SKU, accepted units and repeat shipment evidence below expectations

Decision	Current view	Evidence grade	What would change it
Architecture pressure	200G/lane increasingly favours a short electrical boundary; LPO/NPO remain real counterexamples	Inference	Matched LPO/NPO field results at similar lane rate, power and service cost
Technical/control leaders	NVIDIA: integrated platform; Broadcom: merchant CPO route; TSMC: packaging control; Coherent/Lumentum: component-stack exposure	Inference	Disclosed supplier share, yield, ASP and customer adoption data
Investable conclusion	Named views are provisional; no CPO-specific profit-pool leader is yet proven	Open question	Attributable revenue, margin, qualified yield and warranty evidence

i Public-disclosure conclusion

The missing commercial and economic fields are **not publicly available in a form that supports a decision** as of 18 August 2026. For NVIDIA and Broadcom, public material identifies CPO product routes but does not reconcile an exact customer SKU with accepted units or ports, repeat shipment, field-service experience, supplier allocation, realised ASP, yield/rework, warranty or product margin. For component and process suppliers, public material identifies technology and ecosystem routes but not product-matched share or economics.

This is a conclusion from the disclosure record, not an assumption that the underlying activity is zero: **the public record does not establish a deployed-volume leader, a profit-pool leader, or a standalone CPO public-equity conclusion.**

i Public evidence basis

Three retained public technical records strengthen the manufacturing frame but do not clear the commercial gate: a historical 51.2T CPO system-test record ([Amiralizadeh et al. 2025](#)), a measured 1.6T FOWLP optical-package result ([Wu et al. 2026](#)), and a 180-GBaud driver/modulator subassembly result ([Tran et al. 2026](#)). They establish bounded technical evidence—not current TH6 or Spectrum-X deployment, full-engine yield, service cost, or product margin.

An exact-label review of NVIDIA SN6810/SN6800 and Broadcom BCM78919 also did not find a public record joining an exact CPO SKU to a named customer, accepted unit or port denominator and a repeat shipment. This is a negative retrieval result, not proof that deployment is absent.

The manufacturing record indicates that TSMC states that COUPE-on-substrate CPO is beginning production in 2026; ASE maps wafer probing, optical assembly and final test; Teradyne, Advantest and ficonTEC describe wafer, engine/package and module test insertions; and Aehr reports a follow-on production order for silicon-photonics wafer burn-in ([TSMC 2026b](#); [ASE 2025a](#); [Teradyne 2026](#); [Advantest 2026](#); [ficonTEC 2025](#); [Aehr Test Systems 2026](#)). This shifts the likely manufacturing diligence focus from fibre attach alone to package geometry, test coverage, burn-in and final qualification. It still does not disclose stage yield, test cost, accepted engines or supplier economics.

1.2 Named investment views

- **NVIDIA — positive strategic exposure, medium confidence.** The company’s integrated platform and declared production status create the clearest switch-CPO commercialization route. The unresolved issue is how much incremental CPO economics NVIDIA captures versus the supply chain ([NVIDIA 2026b](#)).
- **Broadcom — positive enabling exposure, medium confidence.** Broadcom has the clearest merchant switch-silicon/CPO product-definition route, but production customer, supplier-content and field-reliability evidence remain limited in public disclosure ([Broadcom 2025b](#), [2026b](#)).
- **Coherent — constructive component-stack exposure, medium confidence.** Coherent’s demonstrations span silicon photonics, external lasers, VCSELs, InP modulators and packaging. Demonstrated breadth is not proof of design wins or CPO margins ([Coherent 2026a](#)).
- **Lumentum — watch for external-laser conversion, medium confidence.** External-laser content can be a valuable CPO input. Its accelerated UHP-laser reliability record strengthens the component qualification case, but public evidence must still establish finished-module quantity, customer concentration and margin capture ([Lumentum 2026c](#), [2026d](#), [2026a](#)).
- **Marvell and TSMC — strategic watchlist, not a CPO-specific call.** Marvell’s accelerator optical-I/O route and TSMC’s advanced-packaging position matter, but their CPO profit attribution is not yet publicly separable.

1.3 The investable question

The report does not ask whether photonics is technically useful. It asks a stricter sequence of questions:

1. Is the electrical channel, power density or front-panel density constraint binding enough that an integrated optical route is required?
2. Can that route be manufactured, qualified and serviced at a cost that survives the yield penalty of deeper integration?
3. Which layer holds the scarce control point after the platform owner, component supplier, OSAT, laser supplier and operator divide the economics?

4. Is any public company’s incremental profit opportunity large enough to matter relative to its existing revenue, gross margin, capital intensity and valuation?

The answer to the first question is becoming more favourable at 200G/lane in Ethernet scale-out. The answers to the remaining three are not yet public facts. That distinction is central: a persuasive technology roadmap can coexist with an uninvestable supplier profit pool.

i Current stance in one page

Architecture: CPO is most credible where 200G/lane makes the host electrical boundary and optical-interface power binding. It is not the default answer for every rack-scale link.

Timing: 2026–2027 is the commercial-proof window. The base case requires customer-confirmed, repeat paid production; a vendor production statement alone is necessary but insufficient.

Value capture: The potential beneficiaries are platform integrators, qualified-engine/PIC designers, external-laser suppliers and advanced package/test routes. Public evidence confirms these process boundaries, but no record identifies their realised share, qualified yield or margin.

Portfolio interpretation: NVIDIA and Broadcom have the clearest system/product routes; Coherent and Lumentum have the clearest optical-content routes; Marvell and TSMC are strategic optionality/control-point cases. All six remain evidence-gated rather than valuation calls.

1.4 What would make the view materially stronger

The highest-value public evidence would be a record that joins five currently separate disclosures: a named CPO SKU; accepted unit or port range; repeat shipment; a supplier or content boundary; and a qualified-yield or service metric. The next-best record is a matched CPO/LPO/NPO comparison that includes the same throughput, reach, optical boundary, facility-power method and replacement policy. Until then, the report treats product launches, lab demonstrations and ecosystem partnerships as signals, not as complete proof.

The most relevant counterexample is not “no optics.” It is continuing innovation in retimed pluggables, linear-drive optics, linear pluggable optics, active electrical cables and near-packaged routes. An architecture becomes durable only if it improves delivered cost, service and power together. The OIF’s energy-efficiency work and the IEEE 802.3dj lane-rate process show why the industry is working the boundary from both electrical and optical directions ([Optical Networking Forum 2024](#); [IEEE 802.3 2024](#)).

1.5 How to use this report

Start with the company cases for the investment call, then test it against the architecture, manufacturing and value-pool chapters. The required sequence is: define the product boundary; compare CPO with the strongest LPO/NPO/pluggable counterexample at the same lane rate; identify the qualified control point; then test whether its profit can matter to the company. Every conclusion names the observation that can change it.

1.6 Evidence cut-off and scope

1. NVIDIA publicly described Spectrum-X Ethernet Photonics as a CPO-based 200G-SerDes system in production, while its product boundary remains distinct from customer-accepted unit proof ([NVIDIA 2026b](#), [2025a](#)).
2. Broadcom presented a 102.4T CPO route alongside 200G/lane connectivity at OFC 2026 ([Broadcom 2026b](#)).
3. Coherent demonstrated multiple CPO technology paths, including 6.4T socketed CPO and 400G-per-lane InP-on-silicon work ([Coherent 2026a](#)).

See the [research record](#) for the fixed scope and evidence boundary.

1.7 Read the report

For the concise, decision-memo version, read the [CPO investment brief](#).

Start with the [decision framework](#), or go directly to [architecture](#), [adoption scenarios](#), or the [company investment cases](#).

[Download the print edition \(PDF\)](#)

2 Decision framework

2.1 Research question

At what bandwidth, topology and system scale does CPO become economically preferable or technically necessary relative to retimed pluggables, linear pluggables, NPO, retimers and active electrical cables—and which suppliers gain or lose profit content as the transition occurs?

The report centres on **scale-out Ethernet optical engines/PICs**. Switch-side CPO and accelerator-side optical I/O are related but different product, customer and value-pool questions. They are not aggregated into a single adoption forecast.

2.2 Claim convention

Label	Meaning	Publication rule
Fact	Direct statement or measurement from an attributable public source	Cite the source and keep the boundary intact
Inference	Analytical conclusion from multiple facts	State the reasoning and key limitation
Forecast	Timing, adoption or economics expectation	State horizon, scenario and falsification trigger
Open question	Decision-critical data not publicly available	Do not fill the gap with an unsupported estimate

2.3 Evidence standard

The evidentiary order is: standards and filings; peer-reviewed/conference research; official product specifications; customer/supplier evidence; management commentary; and market commentary. A vendor claim can establish its own roadmap; it cannot independently prove market-wide yield, comparative power, field reliability or supplier profit capture.

i Public-data boundary

The public book contains only claims that can be traced to an original public source. Restricted papers, raw web archives, private notes, primary research, unpublished models and copyrighted

2.4 Decision gates

1. **Technical gate:** electrical reach, optical budget, thermal and package feasibility at the required lane rate.
2. **Manufacturing gate:** qualified yield after fibre attach, test, rework, reflow and stress exposure.
3. **System gate:** serviceability, failure isolation, host integration and customer acceptance.
4. **Economic gate:** attributable content, realised ASP, gross margin, warranty and capital intensity.

The thesis is not complete until all four gates are evidenced. A compelling demo can clear the first gate without clearing the other three.

2.5 The unit of analysis

The comparison unit is a delivered port at a stated lane rate, reach and service model. A component claim is not automatically a claim about a switch or a supplier's revenue. The unit includes the optics and the incremental electrical, thermal, conversion and replacement burden required to serve an operator.

This prevents three errors: component pJ/bit can omit the laser, receiver, host SerDes, power conversion and cooling; a production announcement can cover a switch family rather than the CPO SKU; and a supplier partnership establishes capacity access, not allocation, content or price.

Boundary control	Required disclosure	Why it matters
Architecture	CPO, NPO, LPO, retimed module or accelerator optical I/O	Prevents comparing different products as if they were substitutes
System	Switch or accelerator, port count, lane rate and reach	Defines the electrical and thermal problem
Commercial	Named SKU, customer, shipment state and repetition	Separates product language from adoption
Economic	Supplier content, accepted yield, ASP, margin and warranty	Separates technical relevance from profit capture

This boundary table is the report's anti-conflation rule. A claim is decision-useful only when its architecture, system, commercial and economic boundaries are stated together; otherwise a component result can be mistaken for a deployed product or a platform announcement for supplier profit.

The hierarchy and claim labels above apply to every chapter: lower-tier sources can identify a diligence question, but cannot settle a higher-tier economic claim. A supplier demonstration can establish a device route; only customer, qualified-manufacturer or contractual evidence can establish accepted volume and allocation.

3 What CPO solves

3.1 The physical problem

At higher lane rates, a long electrical path from switch ASIC through package escape, PCB, connector and faceplate module increasingly consumes channel margin and power. CPO moves the optical engine close to the host ASIC; the potential gain is a much shorter high-speed electrical path. The cost is a tighter integration, thermal, yield and serviceability problem.

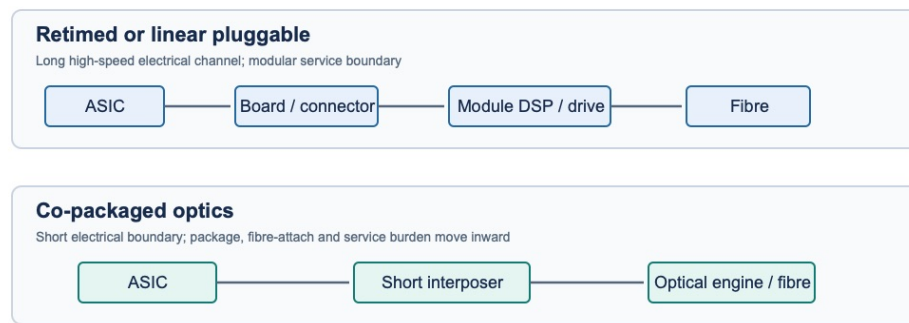


Figure 3.1: Analytical comparison of the electrical and service boundaries of retimed or linear pluggable optics and co-packaged optics, synthesised from the OIF co-packaged-module and energy-efficiency frameworks ([Optical Internetworking Forum 2023, 2024](#)).

3.2 The trade-off is not simply power

Constraint	Why CPO can help	New burden CPO creates
Electrical reach	Removes much of the faceplate electrical channel	Tighter package and SerDes co-design
Power and density	Can reduce retiming/DSP burden and free faceplate space	Thermal density moves closer to the ASIC
Optical integration	Enables short, dense engine placement	Fibre attach and optical test become system-level operations
Service	Potential for known-good subassemblies/ELS architectures	A failed engine is harder to replace than a pluggable
Economics	May shift content toward PICs, lasers, packaging and test	Final yield, rework and warranty can erase the gain

The table defines the investment trade: CPO removes electrical and faceplate constraints, but transfers difficulty into thermal integration, optical assembly, test and service. The technology wins only when the removed burden is larger than the manufacturing and operating burden it adds.

3.3 Where the electrical boundary matters

The relevant constraint is not cable length alone. The channel includes host-package escape, board routing, vias, connectors, the module interface and the equalisation burden required to keep the transmitter and receiver inside their error and eye-quality budgets. At a low enough loss and a mature enough module ecosystem, retimed pluggables retain the advantage of modular service. At a difficult enough channel, the price of preserving that modularity rises through DSP, retiming, power, front-panel thermal load and design complexity.

The OIF’s energy-efficiency and co-packaged-module work frame this as a system architecture choice, not a vendor-specific claim ([Optical Internetworking Forum 2024](#), [2023](#)).

Signal path	Electrical boundary	Service boundary	Core trade-off
Retimed or linear pluggable	ASIC → package/board → connector → module	Module at faceplate	Preserves modular replacement but consumes channel margin and faceplate power.
CPO	ASIC → short interposer → optical engine	Engine/package assembly	Shortens the electrical path but concentrates package, fibre-attach and service risk.

3.4 Power is necessary, but not sufficient

A 102.4T thought experiment makes the boundary concrete. With $64 \times 1.6\text{T}$ ports, an assumed 7.2 W CPO optical interface per port uses 460.8 W; a 24 W fully retimed interface uses 1,536 W. The comparison covers the interfaces only—switch core, endpoint optics and common chassis loads are held outside the frame. On these assumptions, CPO uses about 70% less interface power than retimed optics and sits 10% below an 8 W LPO case ([NVIDIA 2025c](#); [Marvell 2025](#)).

That last comparison is the investment challenge. If a linear or near-packaged alternative can preserve serviceability while remaining near CPO on power, CPO must earn its integration penalty through density, electrical reach, thermal design or a better qualified-cost curve.

Question	CPO-friendly answer	Countercase that would weaken the thesis
Electrical margin	Host channel is the limiting link budget	LPO/advanced pluggables demonstrate comparable margin at the same lane rate
Optical power	Retiming/DSP burden is material	Linear route remains close in full-system power
Density	Faceplate and routing constrain system scale	Modular optics fit within thermal and mechanical envelope
Operations	External laser/connector route isolates failures	Replacement, MTTR and spare cost favour modular optics

4 Architecture contest

4.1 Five architectures, five different constraints

Architecture	Electrical path	DSP / retimer	Field replacement	Current read
Retimed pluggable	Long	In module	High	Mature baseline; power and density become difficult
Linear pluggable optics (LPO)	Long	Reduced or omitted	High	Strong countercase where host-channel margin holds
Near-packaged optics (NPO)	Shorter	Architecture dependent	Moderate	Intermediate route with fewer CPO service penalties
Switch-side CPO	Very short	Often relocated/reduced	Low	Strong 200G/lane commercial signal; production economics unproven
Accelerator optical I/O	Package/die-scale	Architecture dependent	Very low	Separate longer-duration scale-up opportunity

4.1.1 How to read the matrix

The comparison has one dominant countercase and two distinct alternatives. LPO is the immediate test of whether the host channel can carry the lane rate while preserving modular replacement. NPO is the compromise route when the electrical path must shorten but operators still value an intermediate service boundary. Switch-side CPO has the strongest 200G/lane timing signal because it moves the electrical boundary closest to the ASIC; its investment case depends on qualified yield and service economics, not on proximity alone. Accelerator optical I/O belongs in a separate scale-up adoption track rather than in the switch-CPO ranking.

Decision rule: CPO wins only when its electrical and density advantage is large enough to pay for the added package, attach, qualification and replacement burden. If LPO or NPO meets the channel

and power requirement with materially better field economics, the system can remain modular even at a higher lane rate.

4.2 Decision matrix

Test	Pluggable/LPO	NPO	CPO
Best when	Flexibility and field replacement dominate	Electrical channel is tight but serviceability matters	Density/electrical reach is the binding constraint
Must prove	Host margin, interoperability, error/power distribution	Package integration and replacement method	Final yield, fibre attach, qualification and service economics
Main disproof	Cannot meet channel/power requirements	Does not improve TCO versus pluggable	Yield/service penalty outweighs electrical/power gain

This matrix makes the substitution test explicit. Pluggables and LPO are not inferior versions of CPO; they are the control case whenever channel margin and power remain acceptable. NPO is the intermediate test. CPO earns a preference only when the shorter electrical path solves a binding system constraint and the added qualification and service burden is shown to be manageable.

4.3 Architecture is a portfolio of trade-offs

Retimed pluggables move electrical complexity into the module and retain the cleanest replacement model. LPO removes or reduces module DSP complexity but demands a disciplined host-channel and interoperability environment. NPO is a useful category when the electrical path must shrink but the operator still wants an intermediate replacement boundary. CPO moves the optical engine closest to the ASIC; it has the greatest ability to compress the high-speed electrical path and the greatest exposure to package, attach, qualification and field-service economics.

Accelerator optical I/O is a separate adoption track: a scale-up fabric or chiplet/interposer architecture with different buyers, host integration, failure domain and supplier set. Marvell’s silicon-photonics light-engine announcement and Intel’s optical-I/O-chiplet work make the strategic case, while leaving the switch-CPO volume curve as a separate question ([Marvell 2025](#); [Intel 2024](#)).

Decision gate	If yes	If no
Does the host electrical channel hold at the required rate and reach?	Test whether module power/density remains acceptable.	Evaluate LPO/NPO or a shorter electrical boundary.
Is module power/density acceptable?	Retimed or linear pluggable remains viable.	Evaluate LPO/NPO.

Decision gate	If yes	If no
Can a serviceable intermediate boundary work?	Consider NPO or a detachable-engine route.	Evaluate switch-side CPO.
Are yield and service economics qualified?	Commercial CPO candidate.	Architecture remains unproven.

4.4 The 200G and 400G distinction

At 200G/lane, product-route evidence is sufficiently specific to justify serious diligence: Broadcom describes the BCM78919 as a 102.4T multilayer CPO switch with 200G SerDes, and NVIDIA describes a 200G-SerDes Spectrum-X Photonics route ([Broadcom 2025d](#); [NVIDIA 2026b](#)). Neither disclosure supplies a matched pluggable/LPO TCO, a final yield waterfall or accepted unit data.

At 400G/lane, technology demonstrators show why the boundary is being investigated but not why a CPO winner has been established. The Zhou paper models a 212.5-GBaud linear-drive environment; the disclosed result depends strongly on the assumed bump-to-bump loss ([Zhou et al. 2026](#)). The correct takeaway is conditional: as the electrical loss budget tightens, deep integration becomes more valuable. The incorrect takeaway is that a universal loss threshold automatically establishes CPO economics.

Investment implication

Lane rate is a trigger for diligence, not a valuation input. A supplier needs both an architecture advantage and evidence that it controls a profitable, qualified portion of the implementation.

4.5 Comparison protocol for technical claims

The report applies a fixed protocol before comparing a CPO claim with a pluggable, LPO or NPO claim. The lane rate and aggregate bandwidth must match; a 100G/lane result cannot settle a 200G/lane question. The reach, fibre type, FEC threshold, modulation format and electrical channel loss must be stated. The power boundary must state whether it includes laser, driver, receiver, host SerDes, module DSP, voltage conversion and cooling. Finally, the operational boundary must identify the replaceable element and the recovery procedure. If these fields are absent, the source can illustrate a mechanism but not establish an architecture winner.

This is especially important because marketing labels conceal different engineering allocations. A “linear” solution can still depend on particular host equalisation, connector quality, cable/reach limits and receiver sensitivity. A “co-packaged” solution can use different engine counts, laser distribution, package design and replacement architectures. The reported pJ/bit number may be correct within its boundary yet unhelpful for the investment question if the omitted burden is material.

Comparison field	Minimum disclosure	Why an omission changes the conclusion
Lane and modulation	Gb/s per lane, baud rate, PAM/coherent mode	Determines electrical and optical bandwidth burden
Link boundary	Die-to-die, host-to-module, fibre reach and connector count	Prevents a short lab path from representing a deployed link
Error criterion	BER/TDECQ/FEC threshold and equalisation method	Defines whether performance is actually comparable
Power boundary	Included chips, laser, conversion and cooling	Prevents low component power from becoming low system power
Service boundary	Replaceable module, laser, fibre array or engine	Determines operating cost and downtime risk
Manufacturing boundary	Die, engine, board or final system acceptance	Determines whether yield claims are decision-useful

The report treats a comparison as **matched** only when enough of these fields are public. That is a high bar, and the present record does not clear it for a full 102.4T CPO/LPO/NPO/retimed TCO comparison. The absence itself is informative: it signals that investment conclusions should be architecture- and timing-oriented rather than a precise cost or earnings claim.

4.6 NPO deserves separate diligence

NPO is often placed between pluggables and CPO on a simple integration spectrum. That is useful but incomplete. A near-packaged approach can alter the electrical path and thermal layout without inheriting every CPO service boundary; it may also create a new package, connector or cable-management problem. IEEE 400G-per-lane study-group material and the OIF CEI-448G framework explicitly treat NPO and CPO as distinct electrical-attachment contexts. OIF also makes management, mechanical compatibility and multi-vendor interoperability separate requirements rather than consequences of a short path alone ([China Mobile and IEEE 802.3 400G per Lane Study Group 2026](#); [Optical Networking Forum 2026](#)).

The investor implication is that NPO is not merely a delayed CPO outcome. It can be a genuine substitute if it captures enough electrical/power benefit while preserving a better acceptance, replacement or supply-chain model. Any claim that CPO necessarily wins at 400G/lane must therefore be tested against NPO as well as LPO and advanced pluggables.

5 Scale-out optical engines and PIC design

5.1 The engine is a coupled system

An optical engine is not a single photonic chip. It is the coupled design of PIC, EIC/driver/TIA, laser architecture, fibre interface, thermal path, electrical package and test strategy. The most valuable technology is the one that improves the cost of a **qualified good engine**, not merely a laboratory metric.

5.2 Where durable economics could be captured

Control point	Potential advantage	Evidence still required
PIC/EIC co-design	Electrical-optical margin, area and power	Comparable yield, test time and customer qualification
External laser source	Serviceability and optical-power control	Content per switch, laser qualification and replacement economics
Fibre coupling/connector	Known-good-engine test and rework option	Mating life, loss distribution and automated throughput
Advanced packaging	Short channel and dense integration	Final yield, capital intensity, warranty and supplier margins
Test	Escape-rate control and lower field cost	Cycle time, coverage and cost per qualified engine

The control-point ranking is therefore economic as well as technical. PIC/EIC, laser and fibre choices matter because they determine the cost and replaceability of a qualified engine; package and test matter because they determine whether that engine can be accepted repeatedly. The public record supports the control points, but not yet a ranking of supplier margins.

5.3 Scale-out remains the near-term focus

Coherent's OFC 2026 work illustrates the breadth of competing component routes: a socketed silicon-photonics CPO with external laser source, VCSEL-based CPO, and an InP-on-silicon 400G-per-lane modulator demonstration ([Coherent 2026a](#)). This supports technology optionality. It does not establish which route has the best qualified cost, customer acceptance or profit pool.

i Working investment rule

Do not award a component supplier a structural CPO margin premium based on a device demo. Require evidence of design win, yield, attach/test burden, share of engine BOM, warranty allocation and repeat customer volume.

5.4 The design problem is an optimisation, not a parts list

An engine can use a silicon-photonics, InP, thin-film lithium-niobate or heterogeneous route; its commercial merit depends on how the choice interacts with electrical drive, laser delivery, coupling, package thermal paths and test. A PIC with an impressive modulator bandwidth can lose at the engine level if it requires expensive alignment, narrow thermal control, low probe coverage or a high field-failure burden. Conversely, an apparently less elegant architecture can win if it improves known-good-die test, replacement or manufacturing throughput.

Engine layer	Technical objective	Economic consequence	Public decision test
EIC / SerDes interface	Preserve signal margin with low drive energy	Determines host/package complexity	Matched electrical path and energy boundary
PIC	Modulate, multiplex, detect and route light	Determines die area, test and optical loss	Measured link performance at stated conditions
Laser / ELS	Deliver stable optical power	Can create serviceable external content	Laser count, delivered power and replacement allocation
Fibre interface	Couple channels reproducibly	Compounds final-engine yield	Alignment tolerance, loss distribution and mating evidence
Package and test	Protect, cool and screen the engine	Drives cost per accepted engine	First-pass yield, rework, coverage and qualification

The engine should be evaluated as one costed chain. A stronger PIC cannot offset a weak fibre interface or late package escape, and an external laser is valuable only if its service boundary improves the whole system rather than adding another qualification and inventory burden. The OIF ELSFP work is important because external-light architectures can separate the replaceable laser boundary from a deeply integrated optical engine ([Optical Internetworking Forum 2025](#)). Lumentum’s 2026 reliability paper adds a concrete component-level qualification signal for that route, but not finished-module service economics ([Lumentum 2026a](#)). This is not a free serviceability solution: laser distribution, connectors, optical power budgeting, contamination, qualification and operational spares become part of the system requirement.

5.5 Scale-out PIC thesis

The investable scale-out opportunity is a reproducible engine platform that carries its test coverage, laser architecture and attachment process across switch configurations. Coherent demonstrates route breadth; TSMC demonstrates that process integration can be a distinct control point ([Coherent 2026a](#); [TSMC 2024](#), [2026a](#)). Public evidence still does not map qualified supplier share or margin.

6 Manufacturing, reliability and serviceability

6.1 The adoption bottleneck may be manufacturing

The technical case for short electrical paths is necessary but insufficient. In CPO, optical alignment, fibre attach, final package integration and qualification sit closer to the system critical path. IBM’s full-module test vehicle and a recent heterogeneous-integration review both identify packaging, reliability and maintainability as coupled constraints, not afterthoughts ([Knickerbocker et al. 2024](#); [Gao et al. 2025](#)).

6.2 Cost per qualified, shippable engine

$$\text{Cost per qualified engine} = \frac{\text{materials} + \text{assembly} + \text{test} + \text{rework} + \text{capital} + \text{warranty}}{\text{engines that pass}}$$

The calculation asks what each shippable engine costs after failed units, rework and support costs are included. For example, a \$16,000 batch that produces 80 accepted engines costs \$200 per accepted engine—not \$160 per attempted unit.

Gate	Why it matters	Public read
Fibre attach and package	Set first-pass yield and scrap	Fact: process boundaries are documented; yields remain undisclosed
Test and burn-in	Find defects and control throughput	Fact: equipment and insertions are public; time, coverage and escapes are not
Qualification and rework	Determine accepted output	Partial: prototype stress evidence; no production waterfall
Field service	Determines lifetime operating cost	Open: no comparable CPO field data

Recent ASE, Teradyne, Advantest, ficonTEC and Aehr sources map the wafer-to-engine- to-module flow; TSMC and Lumentum add production and component-qualification signals ([ASE 2025a](#); [Teradyne 2026](#); [Advantest 2026](#); [ficonTEC 2025](#); [Aehr Test Systems 2026](#); [TSMC 2026b](#); [Lumentum 2026a](#)). They improve the process map, but do not yet supply the yield, rework or cost data needed to rank companies.

6.3 Serviceability is an architecture variable

External laser sources, detachable optical interfaces and socketed engines may reduce the operational penalty of deep integration. The OIF’s ELSFP work and a detachable-chiplet-connector prototype show the relevant service boundary, but neither establishes a production field-service model ([Optical Internetworking Forum 2025](#); [Psaila et al. 2023](#)).

6.4 Yield compounds across interfaces

The central manufacturing point is mathematical before it is proprietary. imec’s development-run data show why optical-interface yield and alignment tolerance matter ([imec 2024](#)). If an engine requires many independent connections, finished-board yield compounds across those connections before die yield, attach, rework, burn-in and system acceptance are added. At 1,024 interfaces, a 99.90% assumed connection yield gives about 35.9% all-good yield without rework; 95% board yield requires approximately 99.995% per-connection first-pass yield. These figures define the sensitivity, not a supplier-specific production result.

Assumed per-connection first-pass yield	288 interfaces	512 interfaces	1,024 interfaces
99.500%	23.6%	7.7%	0.6%
99.800%	56.2%	35.9%	12.9%
99.900%	75.0%	59.9%	35.9%
99.950%	86.6%	77.4%	59.9%

The sensitivity is steepest at high interface counts. Even a small improvement in per-connection yield has a large effect on all-good output, which is why automated alignment, screening and rework can matter more than a marginal component-level efficiency gain. ASE’s warpage and coplanarity disclosures add a second failure mechanism after attach: package geometry can move the binding constraint into assembly even when the optical interface itself is controlled ([ASE 2025b](#)). These are scenario mechanics, not reported factory yields.

6.5 Test and service define the real failure domain

The difference between a replaceable laser module and a replaceable optical engine is commercially important. A field-replaceable ELS can isolate a laser failure, but it does not automatically make the PIC, fibre attach or package replaceable. A socket, detachable fibre interface or known-good subassembly can improve serviceability, but it introduces its own insertion-loss, contamination, connector-life and handling requirements. The relevant operator metric is not only power; it is recovery time, spare inventory, field procedure, warranty ownership and blast radius.

Teradyne’s current Photon 100 platform, together with Advantest and ficonTEC capability descriptions, makes the test boundary more concrete: wafer, die/engine, package and CPO-module test are separate insertions rather than one conventional module test ([Teradyne 2026](#); [Advantest 2026](#);

[ficonTEC 2025](#)). Aehr’s follow-on production order further shows that wafer-level silicon-photonics burn-in is being purchased for an expanding manufacturing programme, although the customer, architecture and pass/fail distribution remain undisclosed ([Aehr Test Systems 2026](#)). The public record still does not disclose test seconds, escape rate or cost per accepted engine.

6.6 What would clear the gate

A credible manufacturing upgrade would disclose a defined product boundary and at least three of the following: fibre-attach yield distribution; rework route and recovery rate; environmental qualification sample/condition; optical/electrical test coverage; accepted-engine yield; field-replacement procedure; warranty allocation; or multi-customer production repetition. A lab coupler result is useful engineering evidence, but it is not a manufacturing business model.

6.7 Reliability is a system property

Thermal, optical and mechanical stresses interact in a CPO assembly. IBM’s work reports full-module reflow and stress testing, while its test-vehicle boundary still falls short of production-lot yield and fleet reliability ([Knickerbocker et al. 2024](#)). A separated laser does not remove the PIC, interposer, fibre-interface or connector reliability burden. Lumentum’s accelerated UHP-laser programme is a stronger component-level qualification signal—more than 100 million accelerated device-hours with no reported catastrophic failures—but it is not a finished ELSFP-module or engine field result ([Lumentum 2026a](#)). The report distinguishes **device** reliability, **assembly** reliability and **operational** reliability; only the last establishes whether an operator can isolate and repair the failure domain at acceptable cost.

Reliability layer	Typical evidence	What a positive result means	What remains unknown
Device	Laser/PIC ageing, thermal sweep, optical output	The tested component has a defined stress response	Final-package coupling, system use and field distribution
Assembly	Connector mating, reflow, thermal cycling, humidity	The test vehicle survives a stated integration exposure	Production variation, rework and acceptance yield
Product	Qualification, burn-in, acceptance test	A product boundary met a specified standard	Customer volume and in-field return distribution
Operation	MTTR, spares, swap procedure, warranty	The operator can manage the failure domain	Economics across the installed base

The layers are sequential, not interchangeable. Device ageing can pass while an assembly fails thermal cycling; an assembly can qualify while field replacement is too slow or expensive. A commercial CPO claim therefore needs evidence through the operation layer, not only a component or test-vehicle result.

6.8 The cost of a late failure

The reason yield and service are central is the value of the assembly at the point of failure. A bare photonic die failure can be screened relatively early. A fibre-attach defect after the PIC, EIC, advanced package, substrate and laser distribution have been added consumes much more value. A field failure can add logistics, downtime, diagnosis, replacement inventory and warranty exposure. This creates a non-linear economic outcome: small changes in attach yield, test coverage or reworkability can be more valuable than a modest improvement in component power.

That logic is not a claim that CPO is uneconomic. It is a guide to what the winning implementation must demonstrate. A supplier that can improve test-before-integration, passive/automated attach, known-good-engine screening, detachable service boundaries or final qualification could capture more durable value than a supplier whose device is marginally faster but operationally hard to deploy.

7 Adoption timing and scenarios

7.1 Separate commercial proof from meaningful adoption

Commercial proof means repeat paid production from two independent customers, or sustained/repeated production by one major customer, with a clear CPO product boundary. **Meaningful adoption** means a disclosed unit/port denominator large enough to assess the technology’s economic relevance. The latter is not currently quantifiable from the public record.

Scenario	2026–2027	2028–2030	Key evidence required
Bear	CPO stays concentrated in selected systems; pluggables, LPO, AECs and NPO improve	Service/yield penalty prevents broad scale-out adoption	Customer deployments fail to expand; low qualified yield or high service burden
Base	Switch-side 200G/lane CPO gains repeat production proof	Adoption remains concentrated in highest-bandwidth fabrics	Accepted-unit range, repeated shipments, final-yield waterfall and matched TCO
Bull	Qualified CPO proves repeatable across leading platforms	CPO expands into wider scale-out and selected scale-up domains	Strong field reliability, service solution and disclosed supplier economics

The scenarios differ by evidence, not by enthusiasm. The base case requires repeat production at 200G/lane but keeps adoption concentrated until yield, service and matched-TCO data improve. The bull case adds reproducible qualification and supplier economics; the bear case is confirmed if modular alternatives close the system gap.

Forecast: 2026–2027 is the central commercial-proof window. NVIDIA’s current production statement is the strongest positive public signal; it does not settle accepted units, customer mix, comparative economics or supplier profit capture ([NVIDIA 2026b](#)).

The August 2026 NVIDIA page adds named-adopter context, while CoreWeave provides a useful negative control: its SN6600-LD deployment is not identified as the separate SN6800/SN6810 CPO configuration, even though CoreWeave is also named as a Photonics adopter ([NVIDIA 2026c](#); [CoreWeave 2026](#)). The commercial gate therefore remains open for exact SKU, accepted units and repeat shipments.

7.2 Falsification checklist

Downgrade the base scenario if any of the following occur:

1. Named customers deploy 200G/lane LPO or advanced pluggables with similar power and service cost.
2. CPO production announcements resolve to evaluation quantities or non-CPO SKUs.
3. Final-engine yield/rework remains poor after qualification.
4. Contracts show CPO component content is low-margin or exposed to rapid price-down.

7.3 A gated adoption timeline

This is a commercial-proof framework, not a market-share forecast. It can be upgraded or downgraded as customer and shipment evidence appears.

Architecture / domain	2026 public read	2027 base condition	2028–2030 condition	What would invalidate the path
Retimed and advanced pluggables	Mature baseline	Continues where flexibility dominates	Remains strong at higher lane rates if power/thermal holds	Material inability to meet electrical/power requirement
200G LPO	Important countercase	Needs qualified, interoperable system evidence	Could take share if service and power remain close to CPO	Host-channel margin or field performance breaks
200G switch CPO	Strongest disclosed prod- uct/production signal	Named SKU, accepted units and repeat shipment	Broader scale-out only if yield and service qualify	Production resolves to evaluation quantity or uneconomic service
400G CPO/NPO/LPO	Experi- mental/roadmap stage	Needs complete matched system proof	Depends on electrical boundary and packaging maturity	Advanced pluggables retain comparable delivered economics
Accelerator optical I/O	Strategic proto- type/roadmap stage	Needs customer product evidence	Separate scale-up adoption curve	No integration or customer-volume confirmation

The timeline is a sequence of gates rather than a market-share curve. Each row advances only when the specified product, customer, qualification and economic evidence appears; a roadmap announcement alone does not move a domain into the next stage.

7.4 Scenario conditions

Bear case: advanced pluggables, LPO, AECs and NPO close enough of the power and electrical-margin gap that operators preserve modular replacement. CPO remains a selective system feature, with high integration burden and modest external component economics.

Base case: switch-side 200G CPO obtains repeat production evidence during the 2026–2027 verification window. Adoption remains concentrated in the highest-bandwidth fabrics because the operational and supply-chain requirements are demanding. This is the report’s central timing view, not a forecast of CPO market share.

Bull case: final-engine yield, external-light/service architecture and qualified manufacturing become repeatable across leading platforms, making CPO a standard option at the high end of Ethernet scale-out and extending the design logic into selected scale-up systems.

Market-research forecasts should not be used to resolve this question. Public reports publish CPO market values with materially different starting sizes and growth rates, indicating incompatible product boundaries and definitions ([ResearchAndMarkets 2026](#); [Mordor Intelligence 2025](#)). A bottom-up product-and-content bridge is therefore more useful than averaging top-down estimates.

7.5 What counts as a timing miss

The report treats a delayed roadmap differently from a disconfirmed architecture. A schedule slip without negative qualification evidence can move the commercial-proof window but leave the technical thesis intact. A repeated inability to identify a customer CPO SKU, accepted-unit range or repeat shipment after a claimed production period weakens the commercial interpretation. A field or qualification issue that requires a return to a pluggable or NPO boundary is stronger disconfirming evidence because it attacks the architecture’s operational premise.

Event	Timing interpretation	Investment read-through
Product sampling	Early route validation	Not commercial proof
Vendor says production	Positive timing signal	Requires customer/quantity corroboration
Named customer deployment	Stronger system signal	Still needs CPO-SKU and repetition boundary
Second order / multi-customer use	Commercial-proof evidence	Begins adoption confidence
Yield/service disclosure	Manufacturing/economic evidence	Needed for profit-pool attribution
Margin/content disclosure	Earnings evidence	Needed for company materiality

This ordering prevents timing signals from being mistaken for earnings evidence. Production language can move the calendar, but only repeat shipments, qualified yield and attributable content can move the investment conclusion.

This sequence is deliberately more conservative than a technology-market forecast. It avoids declaring adoption when the public evidence might only show an engineering sample, a platform family, a partner relationship or a programme award. It also makes the report useful on a quarterly basis: each new disclosure can be placed on a clear progression rather than absorbed into a vague “CPO is happening” narrative.

8 Industry structure and value pool

8.1 CPO redistributes content; it does not automatically create value

Layer	Potential CPO effect	Key question
Switch silicon and SerDes	Greater system integration and package co-design	Does ASIC control capture the system benefit?
Optical DSP / pluggable module	Some content may be reduced or relocated	Is it displaced, or reintroduced elsewhere?
PIC/EIC	More design and integration content	Who owns the qualified engine design?
Laser / ELS	Potentially higher strategic importance	Is laser content external, differentiated and margin-accretive?
Packaging / fibre / connector	More complex assembly and test	Can suppliers earn returns above capital and warranty cost?
Test equipment	More insertion points across wafer/package/system	Does test complexity create durable pricing power?

The value chain is a map of where work moves, not a forecast of who gets paid. The key diligence question at every layer is whether the added responsibility is scarce, qualified and priced above its capital, yield and warranty burden.

8.2 Profit-pool test

The supplier most likely to capture economics is not necessarily the one with the best device. Durable capture requires control of a bottleneck, credible switching costs, customer qualification, and economics that survive yield, capex, rework and warranty.

Public-data boundary

No retained public disclosure identifies, for a common CPO product boundary, supplier share, realised ASP, final good-engine yield, rework, warranty burden and product gross margin. The absence of this disclosure does not mean there is no value pool; it means the public record cannot attribute that value pool to NVIDIA, Broadcom, Coherent, Lumentum, TSMC or another supplier with enough confidence for an investment conclusion.

Inference: In the current public record, the likely control points are platform integration, optical-engine/PIC design, lasers and advanced package/test process control. None has yet established a public CPO-specific profit-pool lead.

8.3 Content migration is not profit creation

CPO can reduce or relocate the conventional module/DSP bill of materials while increasing optical-engine, laser, package, fibre-interface and test content. That does not tell an investor who captures incremental gross profit. A component can be technically indispensable but economically weak if it is qualified at multiple suppliers, subjected to price-down or burdened with capital, yield and warranty costs. Conversely, a relatively small process step can have strategic value if it is scarce, qualified and expensive to replace.

Layer	Candidate controllers	Potential upside	Principal economic leak
Platform and switch ASIC	NVIDIA, Broadcom	System architecture and customer route	Optics value flows to external supply chain
PIC/EIC engine	Coherent, TSMC, specialist SiPh routes	Integration IP and qualified design	Packaging/test burden or multi-source pricing
External laser	Lumentum, Coherent and others	High-power, serviceable optical content	Commodity qualification or low content per system
Advanced package / OSAT	TSMC, OSATs and system integrators	Integration and yield control	Capital intensity, rework and warranty
Fibre/connector/test	Specialist suppliers	Process lock-in and serviceability	Cost-down and limited share of total BOM

This second table narrows the investment test to control and leakage. A supplier can sit at a technically critical boundary yet lose economics through multi-sourcing, price-down or downstream rework. That is why the report keeps strategic exposure separate from a proven profit-pool claim.

Public process evidence reinforces a distributed control map: TSMC has stated that COUPE-on-substrate CPO is beginning production in 2026; ASE describes package, fibre and final-test integration; Corning demonstrates a Broadcom-silicon switch tray with fibre-array units; and Teradyne, Advantest and ficonTEC supply different test insertions ([TSMC 2026b](#); [ASE 2025a](#); [Corning 2026](#); [Teradyne 2026](#); [Advantest 2026](#); [ficonTEC 2025](#)). These are confirmed technology or capability boundaries, not confirmed supplier allocation or margin.

8.3.1 Supplier-role status

Company	Boundary	Public status	Still unknown
NVIDIA	Switch platform, CPO system and adopter route	Confirmed platform; partnered ecosystem	Exact customer SKU, accepted volume, supplier share and CPO margin
Lumentum	External laser / ELSFP and optical inputs	Partnered technology route; component qualification signal	Finished-module allocation, engine share, ASP and margin
TSMC	COUPE, silicon photonics and advanced package	Confirmed company-stated production milestone	Customer allocation, accepted output and merchant economics
ASE	CPO package, fibre assembly and final-test flow	Confirmed OSAT capability/demonstration	Installed product line, stage yield, customer and pricing
Corning	Fibre-array units and optical-management hardware	Partnered demonstration	Broadcom SKU linkage, supplied share and production volume
Teradyne	Wafer, engine/package and module test equipment	Confirmed equipment capability	Installed CPO line, throughput, coverage and cost per good engine
Advantest	Wafer-to-final optical test concepts	Confirmed equipment capability	Customer installation, test economics and output
ficonTEC	Die-level optical-engine test and automated coupling	Confirmed equipment capability	Installed production use, yield and pricing

“Confirmed” describes the public boundary actually disclosed; it does not imply allocation, exclusivity or profit capture. “Partnered” describes a named ecosystem or demonstration relationship whose commercial share remains unreported.

8.4 The profit-pool scorecard

For every company, the report asks six questions: does it control a product-critical layer; is that layer qualified in a named system; is it difficult to replace; is supplier share identifiable; can it earn a margin after yield/rework/warranty; and is the result material to consolidated earnings? A “yes” only to the first question is technology optionality, not a completed investment case.

NVIDIA’s and Broadcom’s announcements establish platform/product control points ([NVIDIA 2026b](#); [Broadcom 2025d](#)). NVIDIA’s partnerships with Coherent and Lumentum strengthen the supply-chain signal, not the supplier-allocation case ([NVIDIA and Coherent 2026](#); [Lumentum 2026d](#)).

9 Company investment cases

9.1 How to read these cases

These are evidence-gated thematic views, not price targets. “Positive” means the company has credible strategic exposure to a potential CPO control point; it does **not** mean CPO earnings are presently quantifiable or that the security is suitable for any investor.

i Common public-disclosure conclusion

Across all six cases, the decision-grade data are not publicly attributable: customer acceptance and repeat volume at an exact product boundary; supplier content/share; product price and margin; final yield/rework; field returns and warranty. This report treats those fields as unavailable, not as zero. The result is a relative strategic stance rather than a CPO revenue, EPS, valuation or profit-pool ranking.

9.2 Expectations versus variant view

This public edition separates three things that are often blurred in technology investing:

1. **Observed public facts** — product, customer, qualification, shipment and filing records linked in the report.
2. **External expectations** — management targets and market estimates. Restricted sell-side research is used privately only; exact proprietary estimates and analyst identities are not published here.
3. **Author’s variant view** — a derived positive, neutral or negative stance, with a stated catalyst and falsification condition.

The private model is being prepared to translate reconciled consensus baselines into bear/base/bull CPO revenue, EPS and valuation sensitivity. No CPO-specific sensitivity is published until the underlying inputs are sourced, date-stamped and internally reconciled. This is deliberately not a target-price report.

Required input	Public status	Publication rule
Baseline consensus revenue, EPS, capex and valuation	Restricted-source intake pending	Publish only derived ranges where permitted
CPO systems, adoption and engines/system	Partially evidenced	Label scenario assumptions clearly
Supplier content, share, ASP and product margin	Not publicly attributable	Do not infer from consolidated results

Required input		Public status	Publication rule	
Yield, rework, warranty and cannibalisation		Not publicly attributable	Keep as private sensitivity inputs, never facts	

Company	Current view	CPO/control route	Core evidence	Main missing proof
NVIDIA	Positive strategic exposure	Integrated Spectrum-X Ethernet Photonics platform	CPO-based 200G-SerDes system described as in production (NVIDIA 2026b)	Units, customer mix, CPO economics and supplier split
Broadcom	Positive enabling exposure	Merchant switch ASIC + third-generation CPO route	200G/lane CPO announcement; 102.4T CPO path (Broadcom 2025b , 2026b)	Customer deployment, yields and field data
Coherent	Constructive component exposure	Lasers, SiPh, VCSEL, InP and packaging	Multiple CPO demonstrations (Coherent 2026a)	Design wins, share and CPO margins
Lumentum	Constructive/watch	High-power and DWDM external-laser inputs	OFC 2026 CPO-oriented laser demonstrations (Lumentum 2026c)	Customer conversion, volume and margin attribution
Marvell	Strategic watch	Scale-up optical-I/O/Photonic Fabric	Celestial AI acquisition and scale-up route (Marvell Technology 2026 ; Marvell 2025)	Production/customer validation and economics
TSMC	Strategic infrastructure watch	Silicon photonics and advanced packaging	Annual-report CPO/silicon-photonics development disclosure (TSMC 2026a)	Merchant economics and customer content capture

The ranking is intentionally relative. NVIDIA and Broadcom have the clearest platform control; Coherent and Lumentum have component optionality; Marvell and TSMC remain watches because the public record does not yet connect their routes to repeat CPO revenue or attributable margins. A positive strategic view is therefore not the same as a proven CPO earnings beneficiary.

9.3 NVIDIA

Fact: NVIDIA states that Spectrum-X Ethernet Photonics combines CPO with 200G SerDes and is in production ([NVIDIA 2026b](#)).

Inference: NVIDIA has the strongest disclosed integrated platform route to commercial switch-side CPO. Its power is system control: ASIC, NIC/DPU, software, reference design and customer route. The public record does not allocate CPO revenue, gross margin or component sourcing to NVIDIA.

Invalidation trigger: disclosed deployments show the CPO element is non-material, yields/service cost are poor, or alternative optics retain comparable system economics.

9.3.1 Product boundary and public evidence

NVIDIA's relevant CPO exposure is not a generic optics claim. It is an integrated networking route: switch silicon and 200G SerDes, optical-engine architecture, software and systems integration, plus a customer/ecosystem route. NVIDIA's materials describe Spectrum-X Ethernet Photonics as a CPO system, while its Vera Rubin production communication places photonics within a broader AI-factory platform ([NVIDIA 2026b](#), [2026a](#)). This is stronger evidence than a component demonstration because it joins the architecture to an announced platform. It is still not a disclosed CPO bill of materials, accepted-unit range or CPO revenue line.

9.3.2 Variant view

Stance: positive strategic exposure; medium confidence. NVIDIA is best positioned to force a CPO architecture decision because it can coordinate the ASIC, NIC/DPU, rack design, software and customer deployment. Its product page names CoreWeave, Lambda, Meta, Microsoft and OCI as first adopters, but does not link those operators to a specific SN6800/SN6810 CPO acceptance record ([NVIDIA 2026c](#)). The differentiated question is whether the system benefit is enough to accelerate high-end CPO adoption before alternate pluggable or LPO routes preserve the same economics.

9.3.3 Earnings relevance and falsification

CPO is unlikely to be separately material to NVIDIA's consolidated earnings in the near term unless it expands platform differentiation, system ASP, attach or customer lock-in. The report therefore does not model direct CPO EPS. A positive update requires named CPO SKU/customer evidence and repeat deployment; a negative update follows if the announced platform is deployed primarily with pluggable configurations, or if service/yield evidence shows that the integrated route cannot scale economically. NVIDIA's strategic partnership with Coherent confirms supply-chain importance, not capture of supplier or NVIDIA gross margin ([NVIDIA and Coherent 2026](#)).

9.4 Broadcom

Fact: Broadcom announced its third-generation 200G/lane CPO technology and, at OFC 2026, presented a 102.4T CPO route ([Broadcom 2025b](#), [2026b](#)).

Inference: Broadcom has the strongest merchant CPO product-definition position. The investment question is where economics settle after customers, engine suppliers and manufacturing partners are paid.

9.4.1 Product boundary and public evidence

Broadcom provides the cleanest merchant-switch product definition in the report. Its Tomahawk 6 Davisson materials identify a 102.4T Ethernet switch/CPO route and 200G SerDes; the product catalogue separately shows CPO as a defined product family ([Broadcom 2025d](#), [2025c](#)). Broadcom also announced a third-generation CPO technology with 200G/lane capability ([Broadcom 2025b](#)). These are credible indicators that a merchant platform vendor is spending product resources on the transition.

9.4.2 Variant view

Stance: positive enabling exposure; medium confidence. Broadcom's potential advantage is architectural leverage: a merchant switch ASIC and a specified CPO platform can influence engine interfaces, ecosystem qualification and customer reference designs. That makes it a likely enabler even if it does not manufacture every engine, laser or package. The risk is that the optical engine becomes externally sourced pass-through content while system integration, service and yield complexity slow customer adoption.

9.4.3 Earnings relevance and falsification

CPO's incremental effect on Broadcom depends on whether it protects switch-silicon share, increases platform value, lowers customer power constraints or creates new high-margin content. Its contribution cannot be inferred from overall semiconductor revenue or corporate margin. Broadcom's March 2026 release strengthens family-level timing by stating that Tomahawk 6 is shipping in production volume, but it covers the TH6 family and multiple interconnect options rather than an exact TH6-Davisson/BCM78919 CPO shipment ([Broadcom 2026a](#)). The stance is strengthened by named CPO customer deployments, repeated shipments and evidence that Broadcom controls differentiated CPO silicon/content. It is weakened if customers use the platform mainly as a technology evaluation route, if pluggable/LPO alternatives meet the same 200G system requirements, or if external suppliers capture the incremental economics.

9.5 Coherent and Lumentum

Fact: Coherent demonstrated socketed CPO, external-laser, VCSEL and InP-on-silicon routes at OFC 2026; Lumentum demonstrated high-power CPO-oriented laser technology and a 16-channel DWDM laser source ([Coherent 2026a](#); [Lumentum 2026c](#)).

Inference: Both are credible optical-content beneficiaries if external laser and optical-engine content expands. Coherent's disclosed technology breadth is broader; Lumentum's laser route is more focused. Neither has public CPO-specific revenue, qualified-engine yield or gross-margin attribution.

9.5.1 Coherent: broad optical-engine option value

Stance: constructive component exposure; medium confidence. Coherent's public CPO evidence spans silicon photonics, external lasers, VCSELs, InP modulators and packaging-oriented routes ([Coherent 2026a](#), [2026b](#)). That breadth is valuable because the winning scale-out engine may use a different PIC/laser/service configuration than early demonstrations. Its central risk is equally clear: a broad technology stack does not identify the customer product, supplier share, qualified manufacturing yield or CPO-specific margin.

The variant thesis is that breadth plus NVIDIA partnership/capacity alignment can create a durable role in a high-value engine or laser layer. Evidence that would make this investable is a named CPO design win, defined content boundary, conversion into repeat production and a margin discussion that distinguishes AI optics from consolidated company performance. The case is invalidated if the company remains a multi-source technology participant, if qualified CPO content is lower than expected, or if the cost of external-light and package integration consumes the theoretical value.

9.5.2 Lumentum: external-laser conversion case

Stance: constructive/watch; medium confidence. Lumentum's CPO relevance is concentrated in high-power laser, external-light and DWDM laser routes. Its OFC material identifies technologies aimed at scale-out and scale-up infrastructure ([Lumentum 2026c](#)). The NVIDIA optics partnership and new U.S. laser facility strengthen the strategic and capacity signals ([Lumentum 2026d](#), [2026b](#)). Its ELSFP reliability paper adds a component-level qualification signal, not a finished-module or CPO revenue bridge ([Lumentum 2026a](#)). The next evidence is product-linked units, laser content, realised price and gross margin.

The differentiated question is whether external light becomes a serviceable, scarce and margin-accretive CPO layer rather than a qualified component with modest content and price-down exposure. Positive evidence would be conversion of a disclosed order or capacity commitment into named product shipments and segment-level economics. Negative evidence would be multi-source commodity pricing, lower-than-expected laser count/content, or a system architecture that integrates light differently.

9.6 Marvell and TSMC

Fact: Marvell completed the Celestial AI acquisition and describes Photonic Fabric as a scale-up optical-interconnect route; TSMC's annual report says it is developing silicon photonics and CPO solutions ([Marvell Technology 2026](#); [TSMC 2026a](#)).

Inference: Marvell is the strongest public-company vehicle for accelerator optical-I/O optionality, a distinct domain from switch-side CPO. TSMC is a likely manufacturing/packaging control point, not a directly comparable optical-engine supplier.

9.6.1 Marvell: a separate scale-up optionality case

Stance: strategic watch; low-to-medium confidence. Marvell's Celestial AI acquisition and its silicon-photonics light-engine work place it at the accelerator optical-I/O and rack-scale interconnect boundary rather than squarely in the switch-CPO comparison ([Marvell Technology 2026](#); [Marvell 2025](#)). This can be strategically important because scale-up fabrics may require tighter electrical/optical integration than conventional Ethernet scale-out. But it has a different customer denominator, software/system dependency, product cycle and service model.

The report does not use switch-CPO production signals as evidence for Marvell's accelerator optical-I/O revenue. The stance improves with a named product, customer adoption, realised Photonic Fabric revenue or a disclosed content/margin bridge. It weakens if the integration remains a roadmap/demo, if competing interconnect standards capture the relevant deployments, or if the acquired technology adds capability without commercial scale.

9.6.2 TSMC: process control, not an optical-engine peer

Stance: strategic infrastructure watch; medium confidence. TSMC's CPO relevance lies in silicon photonics, heterogeneous EIC/PIC integration and advanced packaging, not in acting as a merchant optical-engine supplier. TSMC states that a COUPE-on-substrate CPO solution is beginning production in 2026, upgrading process readiness from development to a company-stated production milestone ([TSMC 2024](#), [2026a](#), [2026b](#)). The disclosure gives no customer, accepted output, capacity allocation or CPO-specific economics. The potential strategic value is process control: if CPO packages require a scarce integration flow, the foundry/package route can shape what platforms become manufacturable.

The investment limitation is attribution. Advanced packaging and silicon photonics can be valuable without being separately visible in TSMC revenue, margin or customer disclosures. A stronger case would require programme-level production volume, a clearer technology/service boundary or signs of constrained capacity and pricing power. It is weakened if CPO remains low volume, if integration is widely reproducible, or if the value concentrates in system suppliers rather than the manufacturing stack.

9.7 What the consensus-versus-variant framework can and cannot do

Consolidated estimates are only a scale check: diversified platform companies may capture CPO through system differentiation, while optical suppliers still lack attributable content, margin and volume data. The public record supports product and technology views, but it does not yet support a defensible CPO-specific EPS bridge for any of the six companies.

The missing bridge is concentrated in three linked inputs: customer-accepted CPO volume, supplier content/share, and product-level margin after yield, rework and warranty. Until those inputs are disclosed at the same product boundary, a numeric EPS sensitivity would be false precision rather than useful analysis.

9.7.1 How a future model will be constructed

For a platform or component supplier, incremental CPO revenue must be built from a common unit chain:

$$\text{CPO revenue} = \text{systems} \times \text{adoption} \times \text{engines/system} \times \text{content/engine} \times \text{qualified share}.$$

Incremental gross profit must then subtract the correct product cost, yield/rework burden, warranty and cannibalised legacy content. The model must keep supplier layers mutually exclusive. For example, an optical engine cannot be counted once as Broadcom platform value, again as Coherent PIC value, again as Lumentum laser value and again as TSMC packaging value unless the separate transfer-price/content boundaries are identified. That is why the report publishes relative stances rather than a spurious market-size allocation.

9.7.2 Catalysts by company

NVIDIA: a customer-confirmed Spectrum-X Photonics CPO SKU with a repeat order and a clear distinction from pluggable SN6600-LD configurations. The product-family boundary matters more than an undifferentiated platform-adoption headline.

Broadcom: a named Tomahawk 6 CPO deployment with an integrator/customer, production sequence and a service/qualification statement. The existing product definition is strong; the missing catalyst is external proof of durable adoption.

Coherent: a programme-level optical-engine or external-light design win and evidence that its broad device portfolio converts into qualified revenue rather than optionality alone.

Lumentum: conversion of strategic-capacity/laser positioning into disclosed CPO-adjacent demand, content and margin logic. A capacity announcement is a supply signal, not proof of economically attractive utilisation.

Marvell: a customer/product announcement that makes the accelerator optical-I/O route commercial rather than architectural. The important validation is scale-up fabric economics, not switch-CPO extrapolation.

TSMC: a public programme that links its photonics/advanced-packaging process to production throughput or constrained capacity. A technology demonstration demonstrates capability, not captured value.

i Why there are no target prices

The public record does not support a defensible CPO-specific revenue, margin, diluted-share or valuation bridge for any of the six companies. Publishing a target price would hide the most important uncertainty: which supplier owns a qualified, profitable portion of the engine and system stack. The correct output is a relative stance with evidence gates.

10 Risks, disconfirming evidence and watchlist

10.1 Thesis risks

Risk	What it would mean	Evidence to monitor
Pluggable/LPO innovation	CPO is not required for major scale-out links	Matched 200G/400G lane-rate power, BER and field data
Yield and qualification	CPO cannot turn prototype integration into qualified output	Accepted yield, rework, Cpk, qualification and field-return data
Serviceability	Operators reject deeply integrated failure domains	Replacement procedures, MTTR and warranty allocation
Weak value capture	CPO shifts technical work without creating supplier margins	ASP, supplier share, gross margin and price-down evidence
Customer concentration	One platform's success does not generalise to an industry	Named SKU, customer count, repeat-shipment and port data

These risks are linked. A weak alternative can make CPO necessary, but poor yield or serviceability can still prevent adoption; a successful platform can prove demand, but concentrated sourcing can leave suppliers with little profit. The watchlist therefore tracks architecture, deployment and economics together.

10.2 Quarterly watchlist

1. Production CPO SKU, named customer and accepted-unit/port range.
2. Repeat shipment or second-customer evidence.
3. Final-engine yield waterfall: fibre attach, package, test/rework and customer acceptance.
4. Qualification and field-service record.
5. Matched CPO/LPO/NPO total-cost comparison.
6. Supplier content, ASP, gross margin, capex and warranty allocation.

10.3 Re-rating rule

The report does not upgrade a technology demo to a profit-pool conclusion. A material upgrade requires evidence from both a **commercial/system** gate (customer, units, deployment) and an **economic** gate (content, yield, margin or warranty) in the same product boundary.

10.4 Evidence that would change the ranking

Observation	Read-through	Action
Customer confirms CPO SKU, accepted unit range and repeat order	Clears a commercial proof gap	Upgrade timing confidence; do not infer supplier economics
Supplier identifies qualified content, share or transfer-price boundary	Begins profit-pool attribution	Assess materiality against company revenue and margin
Final-engine yield/rework or field-return metric becomes public	Tests whether integration is economically viable	Revisit CPO versus serviceable alternatives
LPO or pluggable route demonstrates matched power, reach and service cost	Direct architecture counterevidence	Downgrade CPO necessity at that boundary
CPO announcement is tied only to lab, evaluation or a pluggable SKU	Weakens inferred deployment	Withdraw or narrow commercial interpretation

The action column is deliberately asymmetric: positive evidence upgrades a specific gate, while a boundary mismatch narrows the claim immediately. This keeps the report from converting one strong announcement into a market-wide or company-wide call.

10.5 Quarterly evidence dashboard

The watchlist answers the same questions against the dated evidence base. It is intentionally short enough to use:

1. Which exact CPO SKU is shipping, to whom, in what range, and is the shipment repeated?
2. What is the optical-engine and external-laser boundary in that SKU?
3. Is a yield, qualification or service metric disclosed after final package integration?
4. Has an LPO/NPO/pluggable counterexample closed the relevant system gap?
5. Has company guidance, backlog, capex or margin commentary made the CPO contribution more or less material?

Current limiting factor

The report has enough evidence to rank technical routes and commercial signals. It does not have enough public evidence to calculate CPO-specific supplier revenue, gross margin, EPS or target prices. That is an evidence boundary, not a missing spreadsheet cell.

The main analytical risk is narrative leakage: treating a platform announcement as a CPO-SKU deployment, a partnership as supplier allocation, a component result as production yield, or a market forecast as company revenue. An update withdraws an inference whenever a newly disclosed product boundary requires a narrower reading.

A Methodology and public-data boundary

A.1 Method

The report works from the following chain:

technical constraint → architecture choice → supplier content → qualified economics → investment outcome

Each link must be evidenced separately. A conclusion is downgraded when its support depends on an unobserved link.

A.2 What is public

- Original, publicly linkable sources and attributable public statements.
- Original analytical diagrams, tables and scenarios.
- A public bibliography and source/figure register.

A.3 What remains private

- Copyrighted PDFs and raw archives.
- Private reading notes, interview notes, contacts and unpublished assumptions.
- Working models and source files that cannot be reproduced from public evidence.
- Unverified or incomplete claims.
- Licensed analyst reports, exact consensus estimates, detailed model pages and analyst identifiers unless their licence terms explicitly permit publication.

A.4 Release checklist

Before publication: reconcile claims with the internal evidence record; verify citations and source links; review every figure for attribution and public-use basis; label facts, inferences and forecasts; record unresolved evidence; and render the HTML and PDF outputs.

Unlabelled explanatory prose is the author's analytical framework or a restatement of a labelled table; it is not presented as a new external fact. Product names, dates, measurements, standards statements and company disclosures receive inline citations. Where a paragraph combines evidence and interpretation, the evidence is cited and the interpretation is labelled as an inference or forecast.

A.5 Research protocol

The project follows a falsification-first discipline. A conclusion is not upgraded because an additional source repeats an attractive narrative. It is upgraded when new evidence clears a decision gate that was previously open. For switch-side CPO, the relevant gates are: a defined architecture and SKU; qualified package/manufacturing evidence; customer acceptance and repeated shipment; and attributable supplier economics. The same logic applies to scale-up optical I/O, but the system, customer and component boundaries are different.

This matters because CPO has a natural evidence asymmetry. Product companies can legitimately disclose architecture, roadmaps, port counts, demonstrations and ecosystem partners long before they can disclose customer volumes, yield, cost, service history or supplier allocations. Academic research can demonstrate an electrical, optical or package sub-boundary with great precision, yet still have no evidence about final-engine cost. The methodology preserves that asymmetry rather than treating all positive evidence as equivalent.

A.5.1 Source classification

Source class	What it can establish	What it cannot establish without corroboration
Customer/operator disclosure	Product use, named deployment, operating context	Supplier share, accepted-unit count or margin unless stated
Audited filing	Consolidated financial facts, risks, capital intensity	CPO revenue/margin allocation unless separately disclosed
Company product material	Roadmap, stated architecture, product specification	Independent field performance, market-wide adoption
Standards / implementation agreement	Interface requirements and defined boundaries	Product economics or customer volume
Peer-reviewed paper	Measurement at the reported test boundary	Production yield, warranty, field deployment or profit pool
Consultant / market report	External forecast framing	A reconciled product denominator or company attribution

A.5.2 Reconciliation rules

The report applies five controls before making a comparison. First, compare only the same architecture: CPO, NPO, LPO, retimed pluggable and accelerator optical I/O are not interchangeable labels. Second, identify the physical boundary: lane rate, port count, reach, FEC, electrical loss, laser inclusion and cooling must be stated. Third, identify the commercial boundary: vendor roadmap, customer evaluation, paid shipment and repeat production mean different things. Fourth, identify the financial boundary: consolidated company metrics cannot become CPO product margins. Fifth, identify the source date: current technical claims can be stale in a fast-moving product cycle.

These rules explain why the report sometimes withholds an answer. For example, a production statement can support a timing update but not a supplier earnings bridge if customer SKU, unit, component content and pricing remain undisclosed. A market forecast can describe external expectations but cannot allocate value across a switch platform, PIC, laser, package and test supplier. Withholding an unsupported number is a research conclusion, not an omission.

A.5.3 Scenario methodology

Where public evidence does not support a single forecast, the report uses bear/base/bull conditions. The bear case preserves modular alternatives or exposes yield/service penalties. The base case assumes commercial proof at a defined product boundary but not broad market adoption. The bull case requires repeatable qualified manufacturing, serviceability and multiple-platform expansion. Scenario tables are directional unless their inputs have a dated public source and a stated calculation method.

The report does not convert unknown yield, customer volume or product margin into a “base case” simply because an external analyst or management team is optimistic. External expectations are treated as inputs to a future private sensitivity model. Public output will remain a derived range or qualitative stance unless the number is reproducible from permissible public inputs.

A.5.4 Independence and conflicts

Vendor material establishes the vendor’s claim, not a market fact; the report tests it against customer/operator material, standards, filings and independent technical work where available. The author has no disclosed commercial relationship with the companies discussed.

B Glossary

Term	Meaning in this report
CPO	Co-packaged optics: optical engines integrated close to a host ASIC/package boundary
LPO	Linear pluggable optics: pluggable optics with reduced/omitted retiming/DSP functions
NPO	Near-packaged optics: optical engines placed near, but not fully co-packaged with, the host ASIC
PIC	Photonic integrated circuit; performs optical functions such as modulation, multiplexing and detection
EIC	Electronic integrated circuit; includes drivers, TIAs and related electrical functions
ELS	External laser source, physically separated from the optical engine
SerDes	Serializer/deserializer electrical I/O circuitry
TCO	Total cost of ownership, including service, yield and operational cost where measurable
Qualified yield	Accepted output after assembly, test, environmental screening and relevant customer criteria
Retimed pluggable	A modular optical transceiver that contains retiming/DSP functions and is replaced at the faceplate boundary
ELSFP	External Laser Small Form Factor Pluggable; an OIF-defined external-light interface concept
Optical engine	Coupled PIC, EIC, laser-interface, fibre-interface, package and test implementation rather than merely a photonic die
Known-good die	A die tested before high-value final integration; it reduces but does not eliminate final-package yield risk
First-pass yield	Share of units that pass the stated process/test boundary without rework
Rework	Repair, replacement or retest activity performed after an initial assembly/test failure
Accepted unit	A system or engine that passes the defined supplier/customer acceptance boundary; it is stronger evidence than a lab sample

Term	Meaning in this report
Commercial proof	In this report, repeat paid production from two independent customers or sustained/repeated production by one major customer, with the CPO boundary clear
Meaningful adoption	A disclosed unit/port denominator sufficient to assess economic relevance; it is distinct from a single production claim
Content	The dollar or functional portion of a product supplied by a company; it is not assumed from a partner list
Qualified share	The fraction of a defined product boundary supplied by a company after qualification; it must not be inferred from ecosystem membership
CPO product boundary	The exact switch/accelerator SKU, optical configuration, architecture and relevant service boundary to which a claim applies
Scale-out	Network expansion across many nodes/racks, typically prioritising flexibility, topology and operational serviceability
Scale-up	High-bandwidth interconnect inside or among tightly coupled compute domains; it can have a different optical-I/O architecture and buyer
Facility-adjusted power	Optical-interface power plus explicitly stated conversion/cooling assumptions; it is not complete data-centre energy without full-system inputs
Falsification trigger	Evidence that would materially weaken or invalidate a stated inference or forecast

C Sources and figure register

C.1 Source policy

The bibliography contains the public source of record. This website does not host source PDFs or raw web-page archives. Links open the original publisher, investor-relations or standards location.

C.2 Visual and figure register

Visual	Status	Cited input / as-of date	Reproduction method and boundary
Figure 3.1 — signal-path comparison	Original analytical diagram	OIF co-packaged-module and energy-efficiency framework (Optical Internetworking Forum 2023, 2024). Evidence cut-off: 18 August 2026.	Redrawn from the stated electrical and service boundaries. It is conceptual, not to scale, and contains no measured power, cost, yield or market-share value.
HTML process rows — physical path, engine, manufacturing, adoption, value pool and earnings bridge	Original explanatory layouts	The cited facts and assumptions in the surrounding section. Evidence cut-off: 18 August 2026.	Text-only layouts generated from report markup and CSS. They add no facts, calculations or supplier allocation; they make the adjacent causal framework easier to read.
Retained-paper snapshots	Not published	Original sources remain in the private evidence system.	Excluded pending copyright and editorial review. No restricted or third-party source figure is reproduced on the public site.

C.3 Reproducibility note

Every quantitative table identifies whether it is a public fact, a calculation, an assumption-labelled scenario or an open evidence gap. The only public PDF figure is documented above with its cited inputs, evidence date and non-quantitative boundary. The [decision evidence register](#) identifies the public source and limitation for each selected evidence record.

C.4 Link integrity and archival policy

Public links point to the original publisher, investor-relations, standards or DOI location. Intel and Marvell primary links were opened successfully in browser review on 11 August 2026. The MDPI article is retained with its DOI because this audit environment received an access-denied response from MDPI even through DOI resolution; that is an access limitation, not evidence that the article is unavailable. If a link changes, the dependent assertion should be checked against the publisher's canonical location. The public site intentionally does not mirror third-party PDFs or pages.

C.5 Bibliography

Advantest. 2026. "Silicon Photonics and Co-Packaged Optics Test Capability." <https://www.advantest.com/tw/products/semiconductor-test-system/soc/v93000/>.

Aehr Test Systems. 2026. "Follow-on Production Order from Lead Silicon-Photonics Customer." <https://www.aehr.com/2026/08/aehr-test-systems-expands-silicon-photonics-production-momentum-with-follow-on-production-order-from-lead-customer/>.

Amiralizadeh, Amir et al. 2025. "Co-Packaged Optics Technology Evaluation for Hyperscale Data Center Fabric Switches." *European Conference on Optical Communication*. <https://doi.org/10.1109/ECOC66593.2025.11263202>.

ASE. 2025a. "Advanced Packaging for AI, Chiplet and Co-Packaged Optics." <https://ase.aseglobal.com/blog/technology/advanced-packaging-for-ai-chiplet-and-cpo/>.

ASE. 2025b. "ASE Demonstrates Co-Packaged Optics for AI Applications." <https://ase.aseglobal.com/press-room/ase-demonstrates-cpo-for-ai-applications/>.

Broadcom. 2025a. "BCM78919 102.4-Tb/s Multilayer CPO Switch with 200G SerDes." <https://www.broadcom.com/products/fiber-optic-modules-components/co-packaged-optics/switches/bcm78919>.

Broadcom. 2025b. *Broadcom Announces Third-Generation Co-Packaged Optics Technology with 200G/Lane Capability*. <https://investors.broadcom.com/news-releases/news-release-details/broadcom-announces-third-generation-co-packaged-optics-cpo>.

Broadcom. 2025c. "Ethernet Switch Co-Packaged Optics Product Catalogue." <https://www.broadcom.com/products/fiber-optic-modules-components/co-packaged-optics/switches>.

- Broadcom. 2025d. *Tomahawk 6 Davissan: 102.4-Tb/s Ethernet Switch with Co-Packaged Optics*. <https://www.broadcom.com/company/news/product-releases/63626>.
- Broadcom. 2026a. “Broadcom Now Shipping the World’s First 1.024 Tbps Switch in Production.” <https://investors.broadcom.com/news-releases/news-release-details/broadcom-now-shipping-worlds-first-1024-tbps-switch-production>.
- Broadcom. 2026b. *Broadcom Showcases Industry-Leading Solutions for Scaling AI Infrastructure at OFC 2026*. March. <https://investors.broadcom.com/node/64036/pdf>.
- Celestica. 2026a. *Celestica Accelerates AI-Scale Networking with DS6000 Series 1.6TbE Switches*. <https://corporate.celestica.com/news-releases/news-release-details/celestica-accelerates-ai-scale-networking-ds6000-series-16tbe>.
- Celestica. 2026b. *First Quarter 2026 Results*. <https://corporate.celestica.com/static-files/7e777cad-64eb-4ae4-90c7-c715a29d100d>.
- China Mobile and IEEE 802.3 400G per Lane Study Group. 2026. *Consideration on NPO and CPO at 400G/Lane*. https://www.ieee802.org/3/400GPL/public/2605/wang_h_400GPL_01_2605.pdf.
- Coherent. 2026a. *Coherent Demonstrates Multiple Technologies for Co-Packaged Optics at OFC 2026*. March. <https://www.coherent.com/news/press-releases/coherent-co-packaged-optics-cpo-technologies-ofc-2026>.
- Coherent. 2026b. *Technology Innovation: OFC 2026 Investor Event*. <https://www.coherent.com/content/dam/coherent/site/en/documents/investors/investor-presentations/2026/march-17/OFC-2026-Investor%20event-deck-vf.pdf>.
- CoreWeave. 2026. “Why AI Factories Need Proof Before Production.” <https://coreweave.com/blog/why-ai-factories-need-proof-before-production>.
- Corning. 2026. “Corning at OFC 2026: CPO Switch-Tray Demonstration.” <https://www.corning.com/optical-communications/worldwide/en/home/the-signal-network-blog/corning-at-ofc-2026.html>.
- ficonTEC. 2025. “Multi-Site Die-Level Tester for Double-Sided Compact 3D CPO Optical Engines.” <https://www.ficontec.com/jp/multi-site-die-level-tester-for-double-sided-compact-3d-cpo-optical-engines/>.
- Gao, Han, Wanyi Yan, Dan Zhang, and Daquan Yu. 2025. “Heterogeneous Integration Technology Drives the Evolution of Co-Packaged Optics.” *Micromachines* 16 (9): 1037. <https://doi.org/10.3390/mi16091037>.
- IEEE 802.3. 2024. “P802.3dj Task Force Public Area.” <https://www.ieee802.org/3/dj/public/index.html>.
- imec. 2024. “Interfacing Silicon Photonics for High-Density Co-Packaged Optics.” <https://www.imec-int.com/en/articles/interfacing-silicon-photonics-high-density-co-packaged-optics>.

- Intel. 2024. *Intel Demonstrates Industry’s First Fully Integrated Optical i/o Chiplet*. <https://www.intel.com/content/www/us/en/newsroom/news/intel-optical-io-chiplet.html>.
- Knickerbocker, John et al. 2024. *Next Generation Co-Packaged Optics Technology to Train and Run Generative AI Models in Data Centers and Other Computing Applications*. <https://doi.org/10.48550/arXiv.2412.06570>.
- Lumentum. 2026a. “External-Laser CPO Reliability White Paper.” <https://www.lumentum.com/sites/default/files/2026-06/elsfpeliability-wp-cl-ae.pdf>.
- Lumentum. 2026b. *Lumentum Announces New u.s. Manufacturing Facility to Produce Advanced Lasers for the World’s Largest AI Data Centers*. <https://investor.lumentum.com/financial-news-releases/news-details/2026/Lumentum-Announces-New-U-S--Manufacturing-Facility-to-Produce-Advanced-Lasers-for-the-Worlds-Largest-AI-Data-Centers/default.aspx>.
- Lumentum. 2026c. *Lumentum Demonstrates Industry-Leading Technologies and Products for Scale-Out, Scale-up and Scale-Across AI Infrastructure at OFC 2026*. <https://investor.lumentum.com/financial-news-releases/news-details/2026/Lumentum-Demonstrates-Industry-Leading-Technologies-and-Products-for-Scale-Out-Scale-Up-and-Scale-Across-AI-Infrastructure-at-OFC-2026/default.aspx>.
- Lumentum. 2026d. *NVIDIA Announces Strategic Partnership with Lumentum to Develop State-of-the-Art Optics Technology*. <https://investor.lumentum.com/financial-news-releases/news-details/2026/NVIDIA-Announces-Strategic-Partnership-With-Lumentum-to-Develop-State-of-the-Art-Optics-Technology/default.aspx>.
- Marvell. 2025. *Marvell Demonstrates Silicon Photonics Light Engine for Low-Power Rack-Scale Interconnect in AI Networks*. <https://www.marvell.com/company/newsroom/marvell-demonstrates-silicon-photonics-light-engine-for-low-power-rack-scale-interconnect-in-ai-networks.html>.
- Marvell Technology. 2026. *Annual Report 2026*. <https://investor.marvell.com/sec-filings/all-sec-filings/content/0001835632-26-000011/mrvl-20260131.htm>.
- Mordor Intelligence. 2025. *Co-Packaged Optics Market Size, Share and Growth*. <https://www.marketresearch.com/Mordor-Intelligence-LLP-v4018/Packaged-Optics-Size-Share-Growth-39822098/>.
- NVIDIA. 2025b. *How Industry Collaboration Fosters NVIDIA Co-Packaged Optics*. <https://developer.nvidia.com/blog/how-industry-collaboration-fosters-nvidia-co-packaged-optics/>.
- NVIDIA. 2025a. “How Industry Collaboration Fosters NVIDIA Co-Packaged Optics.” <https://developer.nvidia.com/blog/how-industry-collaboration-fosters-nvidia-co-packaged-optics/>.
- NVIDIA. 2025c. *Scaling AI Factories with Co-Packaged Optics for Better Power Efficiency*. <https://developer.nvidia.com/blog/scaling-ai-factories-with-co-packaged-optics-for-better-power-efficiency/>.

- NVIDIA. 2026a. *NVIDIA Vera Rubin POD: Seven Chips, Five Rack-Scale Systems, One AI Supercomputer*. <https://developer.nvidia.com/blog/nvidia-vera-rubin-pod-seven-chips-five-rack-scale-systems-one-ai-supercomputer/>.
- NVIDIA. 2026b. *NVIDIA Vera Rubin Ramps into Full Production to Power Agentic AI Factories Worldwide*. May. <https://investor.nvidia.com/news/press-release-details/2026/NVIDIA-Vera-Rubin-Ramps-Into-Full-Production-to-Power-Agentic-AI-Factories-Worldwide/default.aspx>.
- NVIDIA. 2026c. “Silicon Photonics Networking Products and Adopters.” <https://www.nvidia.com/en-us/networking/products/silicon-photonics/>.
- NVIDIA and Coherent. 2026. *NVIDIA and Coherent Announce Strategic Partnership to Develop Optics Technology to Scale Next-Generation Data Center Architecture*. <https://investor.nvidia.com/news/press-release-details/2026/NVIDIA-and-Coherent-Announce-Strategic-Partnership-to-Develop-Optics-Technology-to-Scale-Next-Generation-Data-Center-Architecture/default.aspx>.
- Optical Internetworking Forum. 2023. *Implementation Agreement for a 3.2 Tb/s Co-Packaged Module*. <https://www.oiforum.com/wp-content/uploads/OIF-Co-Packaging-3.2T-Module-01.0.pdf>.
- Optical Internetworking Forum. 2024. *System Vendor Requirements Document for Energy Efficient Interfaces*. <https://www.oiforum.com/wp-content/uploads/OIF-EEI-Requirements-RD-01.0.pdf>.
- Optical Internetworking Forum. 2025. *External Laser Small Form Factor Pluggable Implementation Agreement 2.0*. <https://www.oiforum.com/wp-content/uploads/OIF-ELSFP-02.0-1.pdf>.
- Optical Internetworking Forum. 2026. *Next Generation CEI-448G Framework*. <https://www.oiforum.com/wp-content/uploads/OIF-FD-CEI-448G-01.0.pdf>.
- Oracle. 2026. *Oracle Acceleron: AI Network Innovation for the Cloud*. <https://www.oracle.com/cloud/networking/acceleron/>.
- Psaila, Nicholas, Srikant Nekkanty, David Shia, and Pooya Tadayon. 2023. “Detachable Optical Chiplet Connector for Co-Packaged Photonics.” *Journal of Lightwave Technology* 41 (19): 6315–23. <https://doi.org/10.1109/JLT.2023.3285149>.
- ResearchAndMarkets. 2026. *Co-Packaged Optics Market Research Report*. <https://www.researchandmarkets.com/report/co-packaged-optics>.
- Teradyne. 2025. *Silicon Photonics Raises New Test Challenges*. <https://www.teradyne.com/2025/02/24/sipho-raise-new-test-challenges/>.
- Teradyne. 2026. “Photon 100 Silicon-Photonics Test Platform.” <https://www.teradyne.com/products/photon-100/>.
- Tran, Minh et al. 2026. “180-GBaud PAM4 Driver and Modulator Subassembly for Optical Interconnects.” *Optical Fiber Communication Conference*. <https://doi.org/10.1364/OFC.2026>.

W3E.6.

- TSMC. 2024. *TSMC Celebrates 30th North America Technology Symposium with Innovations Powering AI with Silicon Leadership*. <https://pr.tsmc.com/english/news/3136>.
- TSMC. 2026a. *Annual Report 2025*. <https://investor.tsmc.com/sites/ir/annual-report/2025/2025%20TSMC%20Annual%20Report.E.pdf>.
- TSMC. 2026b. “COUPE-on-Substrate Co-Packaged Optics Production Milestone.” <https://pr.tsmc.com/english/news/3302>.
- Wu, Shih-Chang et al. 2026. “Fan-Out Wafer-Level Packaging for High-Speed Optical Engine Interconnects.” *SPIE Photonics West*. <https://doi.org/10.1117/12.3085221>.
- Zhou, Jianying et al. 2026. “400G/Lane for Linear-Drive Optics Applications.” *Optical Fiber Communication Conference*. <https://doi.org/10.1364/OFC.2026.Th1C.3>.

D Decision evidence register

D.1 Purpose and reading rule

This register is the public release manifest for this report. It selects 80 decision-relevant evidence records from the wider research system. Each record is deliberately narrow: it tells the reader what the linked public record establishes, where it is used, and what it does **not** establish. “Used in” identifies the report chapter to which the record is relevant; **Register only** means the source is retained for traceability here but is not used as a standalone factual premise in the narrative. The register is not a list of 80 conclusions. It is an audit trail for the conclusions elsewhere in the report.

The source key is an original public publication, filing, standards document, official product material, customer/operator statement or peer-reviewed paper. “Fact” means the source’s direct statement or reported measurement. “Inference” means the report’s interpretation. “Forecast” means a conditional timing view. No restricted report, private source archive, unpublished model or source-PDF snapshot is included.

D.2 Architecture and electrical boundary

ID	Public evidence record	Type	Used in	Boundary / limitation
P-01	OIF identifies power and signal-integrity pressure at energy-sensitive interfaces (Optical Internetworking Forum 2024).	Fact	2	Requirements document; not a product comparison
P-02	OIF documents a 3.2T co-packaged-module implementation framework (Optical Internetworking Forum 2023).	Fact	2, 3	Industry framework; not volume evidence
P-03	IEEE 802.3dj provides the public lane-rate standards process (IEEE 802.3 2024).	Fact	Executive summary	Standards process; not adoption proof
P-04	Broadcom describes a 200G/lane third-generation CPO route (Broadcom 2025b).	Fact	Executive summary, 8	Vendor product claim

ID	Public evidence record	Type	Used in	Boundary / limitation
P-05	Broadcom describes a 102.4T Davison CPO switch route (Broadcom 2025d).	Fact	3, 8	Product definition, not accepted-unit disclosure
P-06	Broadcom lists CPO switches as a product category (Broadcom 2025c).	Fact	8	Catalogue presence, not customer deployment
P-07	NVIDIA describes CPO power-efficiency logic for AI factories (NVIDIA 2025c).	Fact	2	Vendor technical framing
P-08	NVIDIA describes cross-industry CPO collaboration and engine architecture (NVIDIA 2025b).	Fact	Register only	Vendor architecture statement
P-09	Zhou et al. model 400G/lane linear-drive constraints (Zhou et al. 2026).	Fact	3	Model boundary, not a shipped system
P-10	The report infers that 200G/lane is the strongest switch-CPO public signal.	Inference	Executive summary	Requires future customer/volume validation

D.3 System power and alternative architectures

ID	Public evidence record	Type	Used in	Boundary / limitation
P-11	Marvell demonstrates a silicon-photonics light engine for rack-scale interconnect (Marvell 2025).	Fact	2, 3, 8	Vendor demo; not switch-CPO share
P-12	Oracle presents Acceleron as a cloud-networking route (Oracle 2026).	Fact	Register only	Operator/product counter-case; not matched CPO TCO
P-13	OIF’s energy work supports a delivered-bit comparison framework (Optical Internetworking Forum 2024).	Inference	2	Does not set a universal pJ/bit winner
P-14	The 102.4T power table is an explicit scenario calculation.	Forecast	2	Assumption-labelled; not measured chassis power
P-15	The central scenario favours CPO strongly versus fully retimed interfaces.	Forecast	2	Depends on stated per-port assumptions
P-16	The same scenario shows a much narrower CPO advantage versus LPO.	Forecast	2	Does not include field service or matched chassis evidence
P-17	Retimed pluggables retain modular replacement advantages (Optical Internetworking Forum 2023, 2025).	Fact	2, 4, 5	Architecture principle; economics vary by system

ID	Public evidence record	Type	Used in	Boundary / limitation
P-18	LPO can be a serious countercase where host margin is adequate.	Inference	2, 3	Requires matched product evidence
P-19	NPO may provide an intermediate electrical/service boundary.	Inference	3	Product-specific route remains open
P-20	Accelerator optical I/O is a distinct adoption/value-pool domain.	Inference	1, 3, 8	Must not be aggregated with switch CPO

D.4 Optical engines, PICs and external light

ID	Public evidence record	Type	Used in	Boundary / limitation
P-21	Coherent shows multiple CPO technologies at OFC 2026 (Coherent 2026a).	Fact	4, 8	Technology breadth, not design-win proof
P-22	Coherent's investor event describes its technology portfolio (Coherent 2026b).	Fact	8	Company presentation; no supplier allocation
P-23	TSMC's symposium documents silicon-leadership and AI technology direction (TSMC 2024).	Fact	4, 8	Capability signal, not CPO revenue
P-24	TSMC's annual report documents the company context (TSMC 2026a).	Fact	4, 8	Consolidated disclosure; no CPO margin line
P-25	OIF ELSFP documents an external-laser interface framework (Optical Internetworking Forum 2025).	Fact	4, 5	Standard/interface; not service-cost proof
P-26	Lumentum shows CPO-oriented optical infrastructure technologies (Lumentum 2026c).	Fact	4, 8	Vendor demonstration
P-27	Lumentum/NVIDIA announce an optics technology partnership (Lumentum 2026d).	Fact	7, 8	Partnership, not content allocation
P-28	NVIDIA/Coherent announce an optics technology partnership (NVIDIA and Coherent 2026).	Fact	7, 8	Partnership, not realised supplier margin
P-29	Coherent's multi-route portfolio creates engine optionality.	Inference	4, 8	Requires design-win and yield proof
P-30	External light can improve service separation but creates its own qualification work.	Inference	4, 5	Not a universal serviceability solution

D.5 Manufacturing, qualification and serviceability

ID	Public evidence record	Type	Used in	Boundary / limitation
P-31	Silicon-photonics test creates new production-test challenges (Teradyne 2025).	Fact	Register only	Supplier perspective; no platform test-time data
P-32	CPO qualified cost must include assembly, test, rework, capital and warranty.	Inference	5	Formula; not a supplier cost disclosure
P-33	Multi-interface yield compounds across an engine or board (imec 2024).	Fact	5	Mathematical relationship; interface independence is illustrative
P-34	1,024 interfaces at 99.9% assumed connection yield produce 35.9% all-good yield.	Forecast	5	Illustrative calculation, not supplier yield
P-35	95% board yield at 1,024 interfaces requires ~99.995% per-connection yield.	Forecast	5	Illustrative calculation, no rework model
P-36	A detachable laser boundary does not automatically replace an optical engine.	Inference	5	Needs product-specific service procedure
P-37	Field replacement must be assessed through MTTR, spares and warranty.	Inference	5	Public field data remain limited
P-38	Final-engine yield is a decision-critical missing data set.	Open question	5, 9	No broad public disclosure identified
P-39	Qualification after final integration matters more than a component-only result.	Inference	5	Product boundary required
P-40	No public source in this edition establishes a comparable CPO field-return distribution.	Open question	5, 9	Evidence gap

D.6 Customer, product and commercial-proof signals

ID	Public evidence record	Type	Used in	Boundary / limitation
P-41	NVIDIA states Spectrum-X Ethernet Photonics is in production (NVIDIA 2026b).	Fact	Executive, 3, 6, 8	Vendor production statement; units not disclosed
P-42	NVIDIA describes Vera Rubin platform production context (NVIDIA 2026a).	Fact	8	Broad platform context
P-43	Broadcom presents a 102.4T CPO route at OFC 2026 (Broadcom 2026b).	Fact	Executive, 3, 8	Event material; no customer volume

ID	Public evidence record	Type	Used in	Boundary / limitation
P-44	Celestica reports a CPO Ethernet-switch programme and expected ramp (Celestica 2026b).	Fact	Register only	Customer/content and realised volume remain open
P-45	Celestica presents DS6000-series 1.6TbE switches (Celestica 2026a).	Fact	Register only	Configuration/CPO boundary requires care only
P-46	NVIDIA production language is stronger than a lab demo but weaker than customer-confirmed volume.	Inference	Executive, 6	Await repeat shipment record
P-47	A named SKU plus accepted units and repetition defines commercial proof in this report.	Forecast	6, 9	Research convention
P-48	Production claims without a unit denominator cannot establish market leadership.	Inference	Executive, 6	Customer evidence required
P-49	The first deployment domain is inferred to be Ethernet scale-out switching.	Inference	Executive, 6	Scale-up remains a separate path
P-50	2026–2027 is the commercial-proof verification window.	Forecast	Executive, 6	Conditional timing view

D.7 Adoption scenarios and counterevidence

ID	Public evidence record	Type	Used in	Boundary / limitation
P-51	Advanced pluggables remain a viable architecture baseline.	Inference	3, 6	Must be compared at same system boundary
P-52	LPO must show qualified system evidence, not component power alone.	Inference	3, 6	Evidence gate
P-53	400G/lane raises electrical-boundary pressure.	Inference	3, 6	Does not establish CPO economics
P-54	400G/lane system proof remains incomplete in public evidence.	Open question	3, 6	Component/model evidence exists
P-55	Bear case: modular alternatives retain adequate system economics.	Forecast	6	Scenario condition
P-56	Base case: 200G switch CPO gains repeat production proof.	Forecast	6	Requires named customer and repeat shipments
P-57	Bull case: yield and serviceability become repeatable across platforms.	Forecast	6	Requires production economics
P-58	Top-down CPO market forecasts are too definition-sensitive to average.	Inference	6	Commercial reports use different boundaries

ID	Public evidence record	Type	Used in	Boundary / limitation
P-59	ResearchAndMarkets publishes a CPO market forecast (ResearchAndMarkets 2026).	Fact	6	Paid-report excerpt; methodology not public
P-60	Mordor publishes a CPO market forecast (Mordor Intelligence 2025).	Fact	6	Paid-report excerpt; definition differs

D.8 Value-pool and company exposure

ID	Public evidence record	Type	Used in	Boundary / limitation
P-61	Platform control can shape architecture without owning all optical profit.	Inference	7, 8	Supplier allocation missing
P-62	PIC/EIC integration can be a potential control point.	Inference	4, 7	Needs qualified share and cost evidence
P-63	External lasers can be strategic CPO content.	Inference	4, 7, 8	Requires content and margin attribution
P-64	Package/test can be a control point but can also absorb yield/warranty costs.	Inference	5, 7	Economics not public
P-65	NVIDIA has the clearest integrated platform route.	Inference	Executive, 8	Incremental economics unallocated
P-66	Broadcom has the clearest merchant CPO product definition.	Inference	Executive, 8	Customer deployment and margin open
P-67	Coherent has broad disclosed component-stack exposure.	Inference	Executive, 8	Design win/share/margin open
P-68	Lumentum has a focused external-laser conversion case.	Inference	Executive, 8	CPO units and economics open
P-69	Marvell has accelerator optical-I/O optionality distinct from switch CPO.	Inference	3, 8	Commercial product proof open
P-70	TSMC is a process/integration control-point case.	Inference	4, 8	Attributable economics open

D.9 Investment conclusion and falsification

ID	Public evidence record	Type	Used in	Boundary / limitation
P-71	No public equity has a proven CPO-specific profit-pool lead.	Open question	Executive, 7, 8	Supplier share/yield/margin not disclosed

ID	Public evidence record	Type	Used in	Boundary / limitation
P-72	No company has a defensible public CPO EPS sensitivity today.	Open question	8	Inputs are not reconciled
P-73	No target price is published for a CPO thesis.	Fact	8	Deliberate methodology rule
P-74	NVIDIA is positive strategic exposure at medium confidence.	Inference	Executive, 8	Must clear customer/economic gates
P-75	Broadcom is positive enabling exposure at medium confidence.	Inference	Executive, 8	Must clear deployment/economic gates
P-76	Coherent is constructive component exposure at medium confidence.	Inference	Executive, 8	Must clear content/margin gates
P-77	Lumentum is constructive/watch at medium confidence.	Inference	Executive, 8	Must clear conversion/margin gates
P-78	Marvell and TSMC remain strategic watch cases.	Inference	Executive, 8	Product/value attribution incomplete
P-79	A material upgrade requires one commercial and one economic proof point.	Forecast	9	Research re-rating rule
P-80	The next decisive record joins SKU, units, repetition, content and yield/service evidence.	Open question	Executive, 9	Highest-value evidence gap

D.10 Publication controls

The register records the evidence boundary used for this report. A record is narrowed when a product-family or SKU boundary requires it; the report does not preserve an assertion merely because it is favourable to the thesis.

E Research record

E.1 Scope and evidence cut-off

This is a standalone public CPO investment report covering evidence available through 18 August 2026. It presents one finished analytical view rather than a sequence of quarterly editions or rolling forecasts.

The report separates technical plausibility, commercial proof and profit capture. It excludes restricted analyst material, private notes, raw source archives, unpublished model inputs and claims that cannot be reproduced from public evidence.

E.2 Editorial boundary

The central conclusion is that 200G/lane switch-side CPO has the strongest disclosed commercial signal, while public evidence does not establish accepted volume, qualified-engine economics, a supplier profit-pool leader or a CPO-specific public-equity winner ([NVIDIA 2026b](#); [Broadcom 2025b, 2026b](#)).

The evidence register, bibliography and figure register document the public basis for that conclusion.