



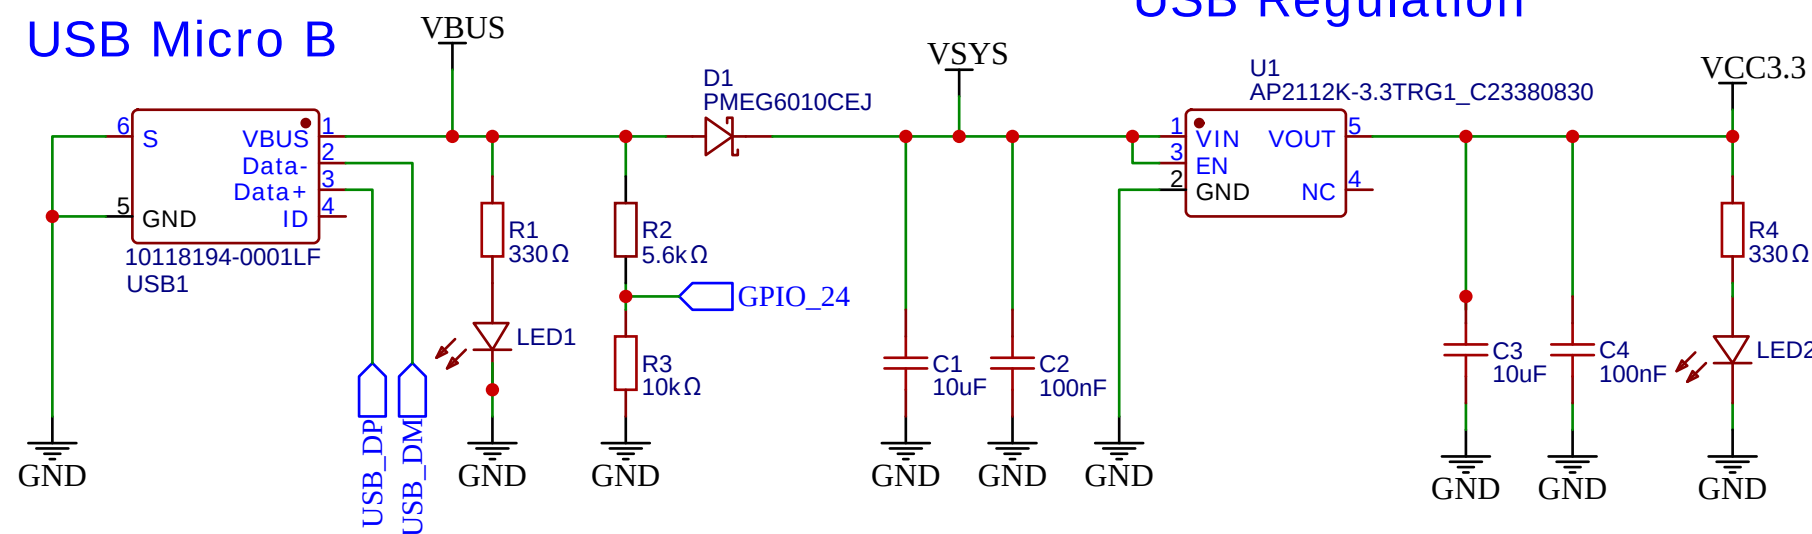


USB Regulation


4x4 LED Matrix (Optional)

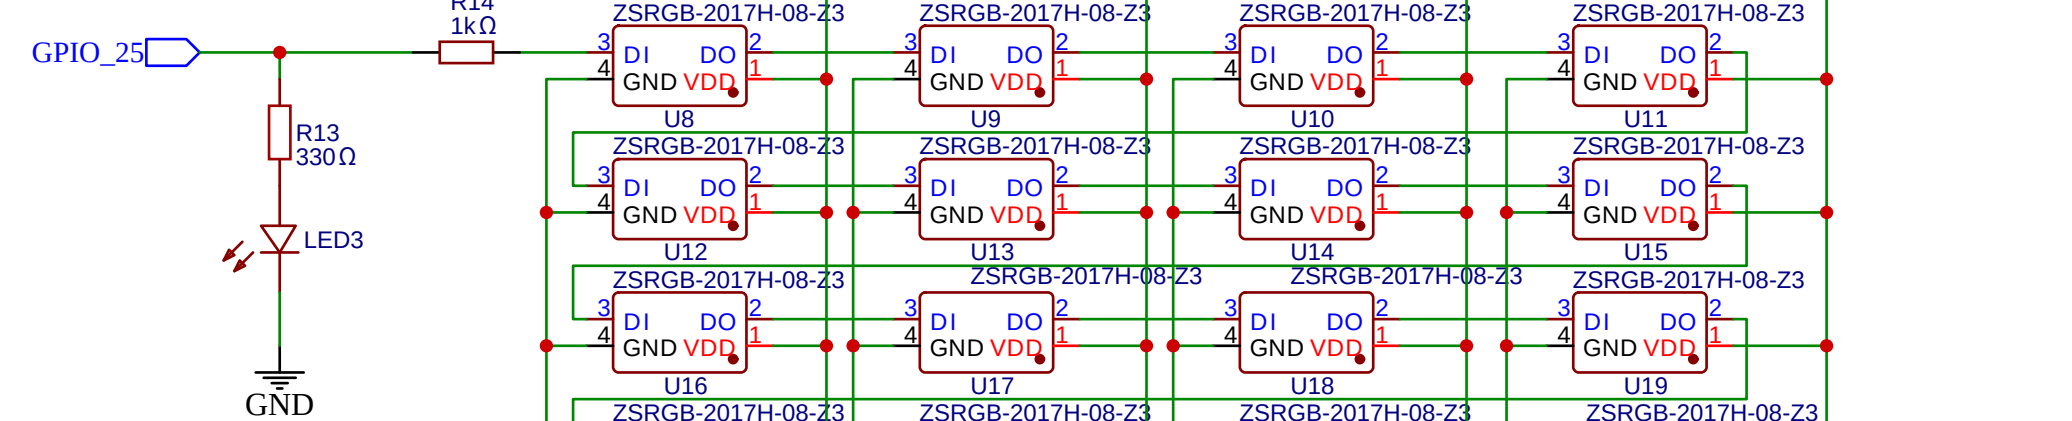


40-Pin IO Interface

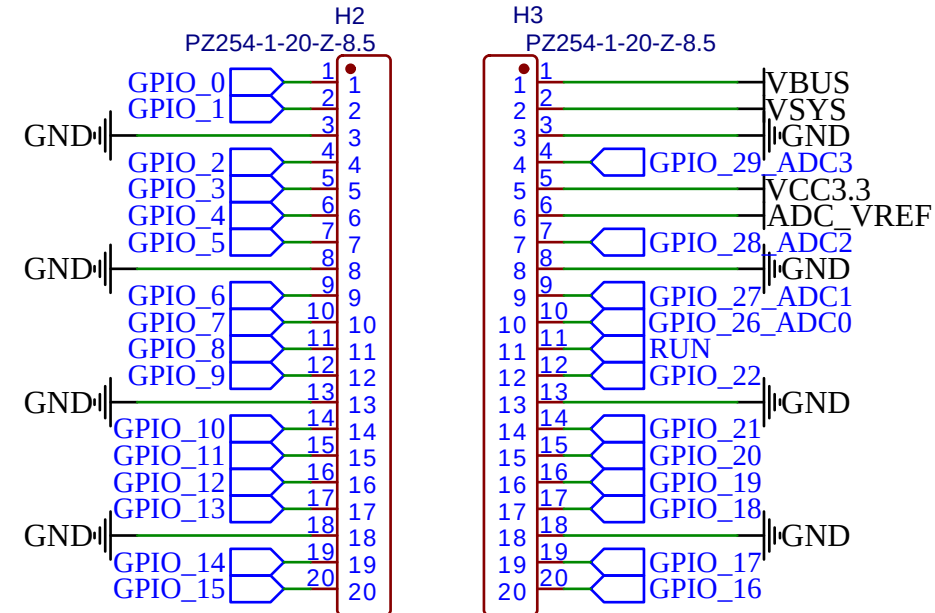


8MB FLASH

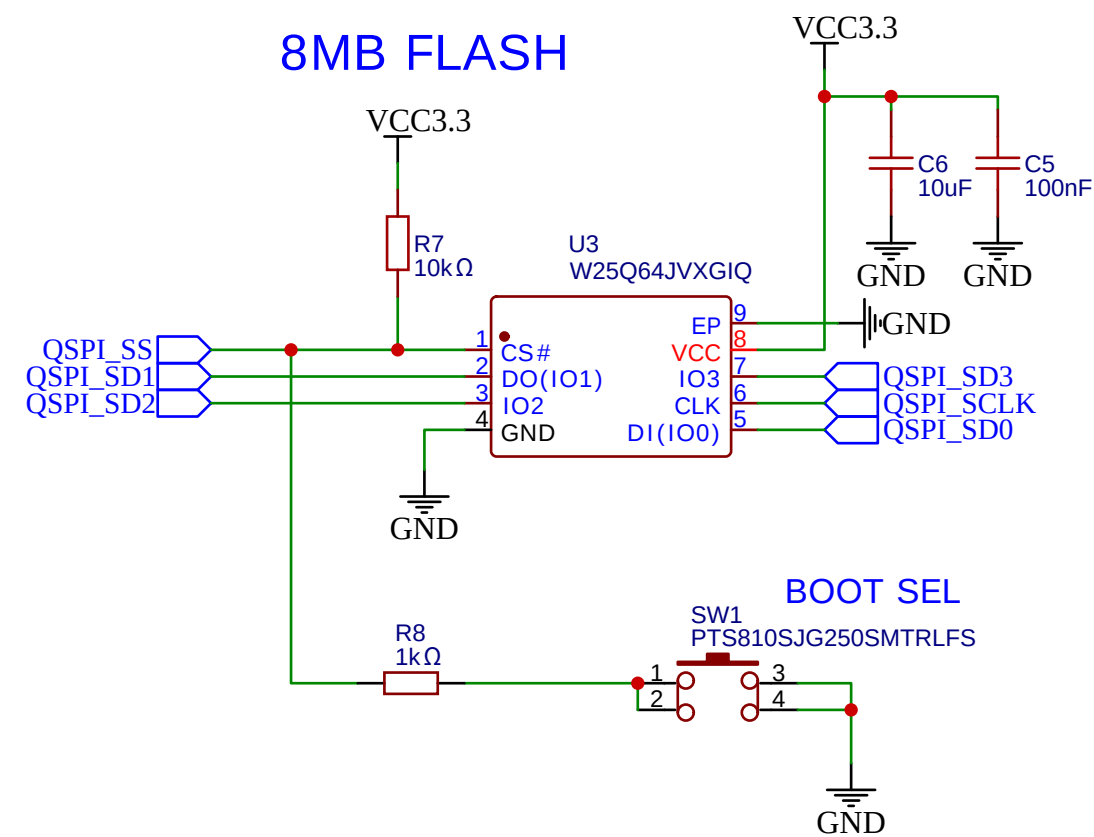


MPU RP2350

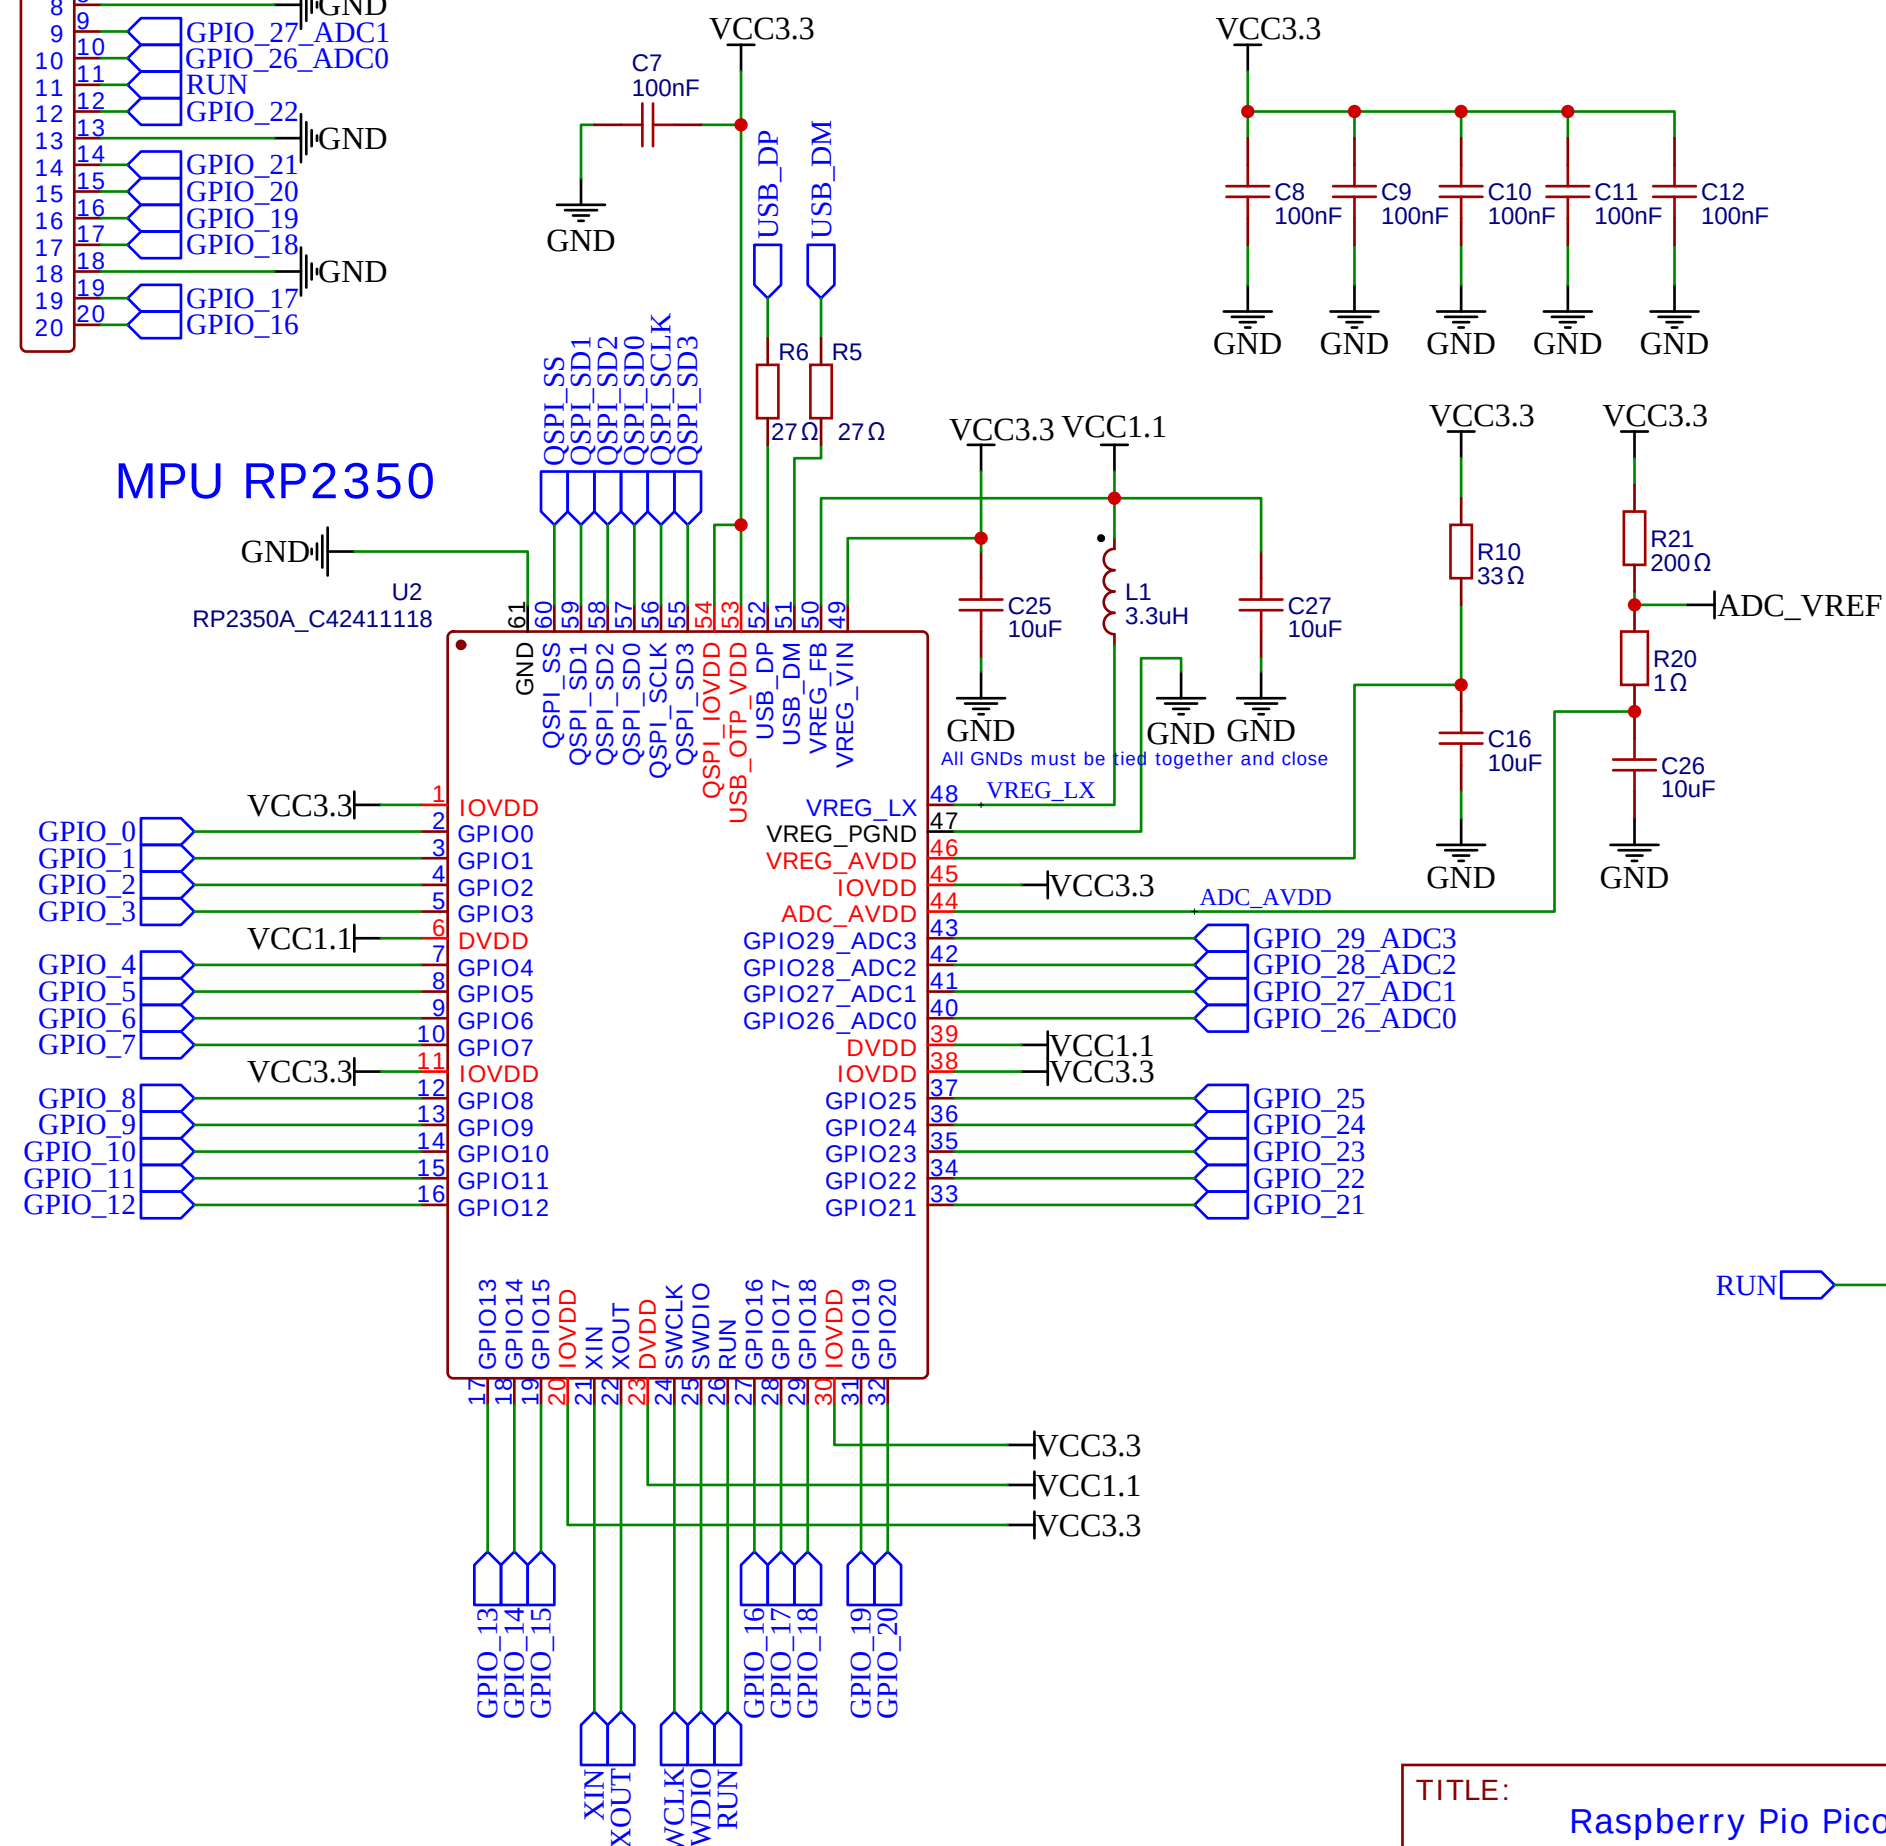


SWD Debug

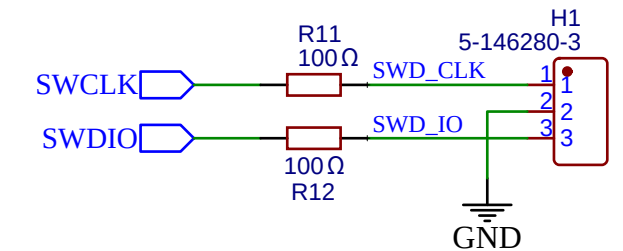


VSYS Voltage Monitor (battery support)

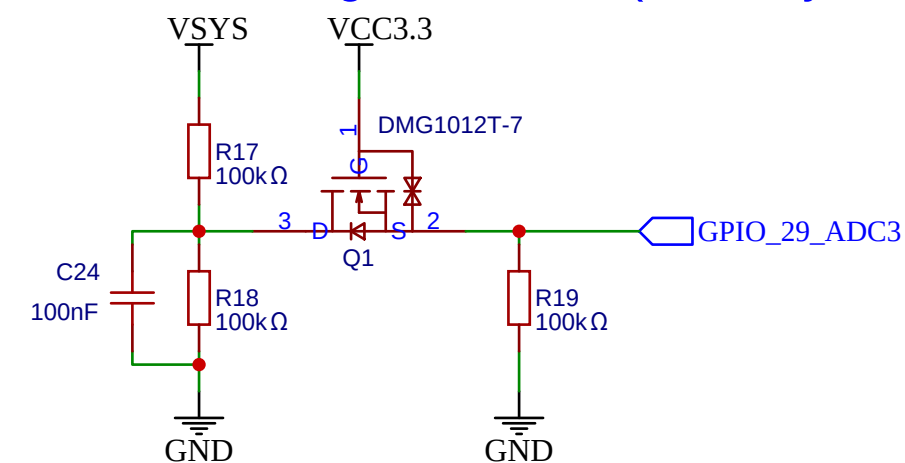

XTAL Oscillator

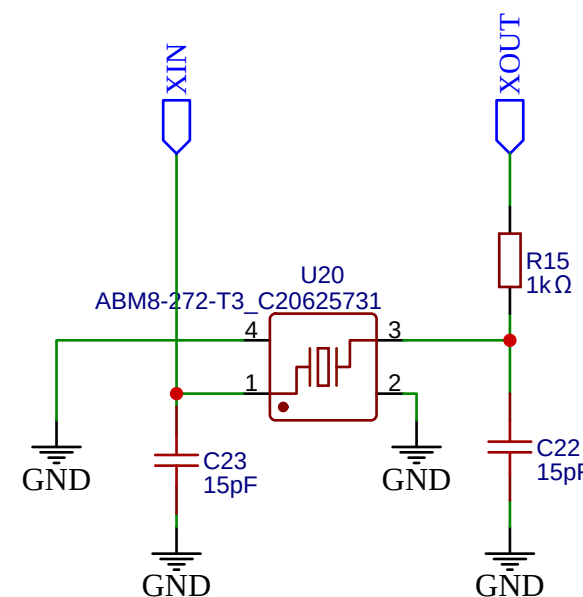

4-pin Plug in I2C 128x32 OLED

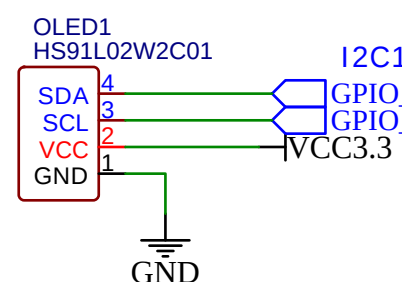

RESET

