



ADDRESSABLE | CONVENTIONAL

**FIRE DETECTION
SYSTEMS**



FIRE DETECTION ADDRESSABLE FIRE DETECTION SYSTEM



The BSR - 2100 is a 2 or 4 loop addressable fire detection panel with expansion capabilities that can upgrade the panel to 8 loops. For compliance with LPCB approval, the maximum number of loops connected must not exceed 4. The panel is designed and constructed according to EN54 - 2 and EN54 - 4 regulations. Each loop can accept up to 150 total points, which can be input units (detectors, call points), output units and line isolators.

For compliance with LPCB approval, the maximum number of fire detectors and manual call points connected to a panel must not exceed 512.

All units that are connected to the loop are referenced and displayed on the LCD panel with the general term « POINTS » and in this term we will be referred to throughout this manual. Each point has a specific address ranging from 1 to 150 in each loop. Each loop can accept various types of points. We will refer to these points later on in the manual. The panel has 96 zones and is suitable for larger installations such as malls, shopping centers, hotels and factories.

It offers an extensive selection of settings and options for controlling the equipment and sirens of the installation which can easily be modified using PC based software. The panel's programming can also be done using a PC.

BSR-2104
BSR-2114



Addressable fire detection control panels with 2 or 4 loops/96 zones

Repeater panel for BSR-100x



BSR-2000



BSR-6055/A

Addressable optical smoke detector

- Standby consumption 1mA, alarm consumption 1,5mA
- Smoke concentration sensitivity adjustable 0,120 dB/m



BSR-6057/A

Addressable optical smoke and thermal detector

- Standby consumption 1mA, alarm consumption 1,5mA
- Smoke concentration sensitivity adjustable 0,120 dB/m
- Class A2S



BSR-6060/A

Addressable rate of rise heat detector

- Standby consumption 1mA, alarm consumption 1,5mA
- operation temperature range -10°C to 55°C
- Class A2R



BSR-8017

Addressable input-output unit


- Operation voltage 21-28V DC
- Standby consumption 1mA



BSR-5036/A

Addressable manual call point

- Standby consumption 1mA, alarm consumption 1,5mA



BSR-5032


Addressable siren

- Operation voltage 21-28V DC
- Maximum sound output 87dB

Technical characteristics

	BSR-2104 Addressable fire detection panel 2 loops / 96 zones	BSR-2114 Addressable fire detection panel 4 loops/ 96 zones
Power Supply	220-240V AC/50-60HZ	
Consumption	100 VA	
Loop circuit	24V up to 200 mA (quiescent state). Each loop can accept up to 150 points. Each loop is protected with a self - resetable fuse. For compliance with LPCB approval, the maximum number of fire detectors and manual call points connected to a panel must not exceed 512	
Siren circuit	4 circuits 24V/500 mA, monitored for open and short circuits. Each output is protected with a self - resetable fuse	
Output Vout	24 VDC (+ - 4 VDC + - ripple 1V peak to peak) continuous output with max current 0,5 A. Each output is protected with a self - resetable fuse	
Output Fault	Open collector output (max 30VDC/6mA)	
Output Alarm	Open collector output (max 30VDC/6mA)	
Total loads (Imax)	The total load on the (loops, sirens, outputs VOUT, relay) must not exceed 2A. $I_{max.a}=I_{max.b} = 2A$	
Structural characteristics		
Cover protection	IP 30	
Construction materials	electrostatically painted steel	
Dimensions (LxHxW)	480 x 410 x 154 mm	
Weight	7Kgr	7,2Kgr

Dimensions in cm

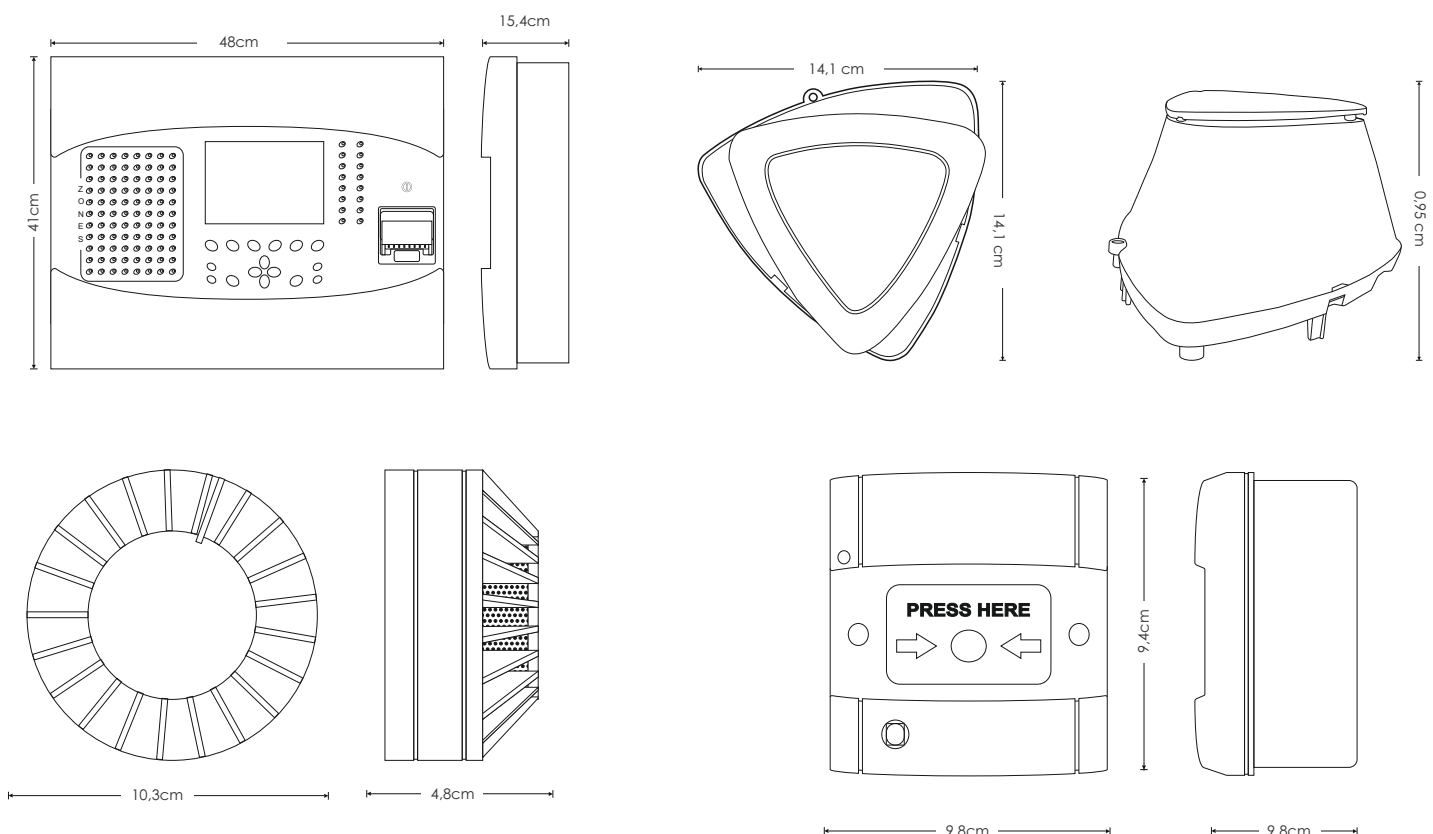



FIRE DETECTION CONVENTIONAL FIRE DETECTION SYSTEM



The family consists of 3 panels (8, 12 and 16 zones) with identical controls and indications. They have 2 outputs for sirens, an alarm relay, a fault relay and a programmable auxiliary relay.

For their operation, two A-986 (12V/7Ah) batteries are required. Alternatively two A-961 (12V/9Ah) batteries can be used for greater autonomy.

In detail the BS-1638 panel has 8 zones, the BS-1642 has 12 zones and the BS-1646 has 16 zones.

All functions and indications are according to the European norms EN 54-2 and EN 54-4.

The panels offer up to 16 zones and are suitable for large installations such as shopping malls, hotels and factories.

They offer a wide range of settings and characteristics for controlling the installation equipment and sirens which can be easily adjusted using a P/C via an Ethernet connection.



BS-655

Optical smoke detector

- Sensitivity 0.120dB/m



BS-657

Optical smoke and thermal detector

- Sensitivity 0.120dB/m and 58-62°C
- Class A2S



BS-660

Rate of rise heat detector

- Class A2R



EVPU

BS-531

Siren with beacon

- Maximum sound output in 1m 88dB
- Maximum consumption 40mA



HEEQA

BS-531/1 & BS-531/1/WP

Siren with beacon

- Maximum sound output in 1m 94dB (sound effect 1)
- Maximum consumption 1,2W



EVPU



BS-536

Manual call point

- Alarm current 8-30mA
- Alarm resistor 470ohm

Technical characteristics

	BS-1638 Conventional fire detection panel 8 zones	BS-1642 Conventional fire detection panel 12 zones	BS-1646 Conventional fire detection panel 16 zones
Mains power supply	220-240V AC/50-60HZ		
Consumption	100 VA		
Autonomy	72 hours with two 12V/7Ah batteries		
Alarm circuits	Two 24V circuits that are monitored for open and short - circuit conditions (The maximum current for each circuit is 300mA)		
Output 24P	24VDC (±3VDC) permanent output with a maximum current of 0.3 A. The output is protected by a resetable electronic fuse		
Output 24M	24VDC (±3VDC) output which is interrupted during a reset.		
Output relays	Three relay contacts that can handle up to 30V DC and 5 A maximum. All the output relays must be protected with fuses with the same rating.		
Total power	The total output power (zone circuits, siren circuits, outputs 24P and 24M) must not exceed 1A		
Battery Specifications			
Battery Type	2 sealed lead acid batteries 12V/7A		
Battery cut of voltage	21V		
Maximum current batteries discharge	1A		
Battery maximum internal resistance R _{imax}	1Ohm		
Structural characteristics			
Cover protection	IP 30		
Construction materials	ABS – polycarbonate, electrostatically painted steel		
Dimensions (LxWxH)	345 x 106 x 348 mm		
Weight (without batteries)	3740gr	3780gr	3820gr